

Catalogue
FOOD SERVICE
Chapter
COOKING


Specific model
C-I725 400V 3~

19098121 26/09/2024

DENOMINATION:

"- 6 mm thick vitro ceramic glass, hermetically sealed in the 1.5 mm thick AISI-304 stainless steel surface top.
- Laser-cut joints and automatic welding. Hidden screws.
- Perfect control of cooking thanks to the energy regulator with 10 power levels which makes it possible to work at low temperatures for delicate recipes or at the highest temperature for quick service.
- Energy is only transferred to the area below the container and the rest of the vitro ceramic surface remains cold.
- It operates when it detects the presence of the container. When the container is removed, it stops heating.
- Consequently, it provides considerable energy savings (energy use is reduced by around 50% compared to gas burners).
- The working environment and atmosphere are more comfortable since the energy is concentrated at the base of the pan, heat radiation and dispersal are reduced and the cooking temperature is reached quickly.
- Safety against overheating. Error messages shown through flashing lights.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.
- Machines with IPX5 grade water protection."
- Cooking areas demarcated by a circular Ø 260 mm screen print, with 5 kW power in each area, quick heating and ideal for à la carte service.

DIMENSIONS



X Width	400	mm	X Gross width	440	mm
Y Depth	730	mm	Y Gross depth	822	mm
Z Height	290	mm	Z Gross height	535	mm
Net Weight	40,0	kg	Gross Weight	53,0	kg
Net volume	0,080	m3	Gross volume	0,193	m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage	400V
Phases	3~
Electric frequency	50/60Hz
Amperage (A)	16A
Heating power	10,00 kW

CONNECTIONS TECHNICAL SPECIFICATIONS

Three-phase +N 400V wiring	3X2,5MM2+T+N




Catalogue
FOOD SERVICE
Chapter
COOKING


Specific model
C-I725 400V 3~

19098121 26/09/2024

C-I725

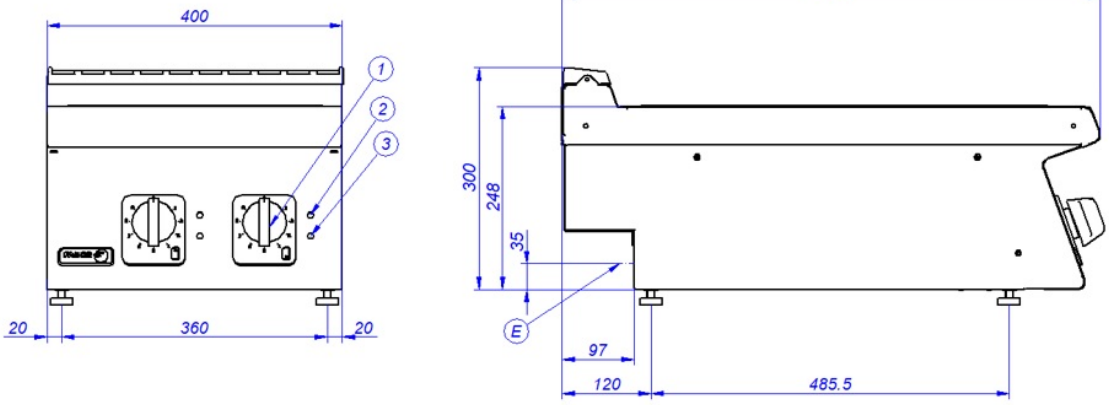

C-I745

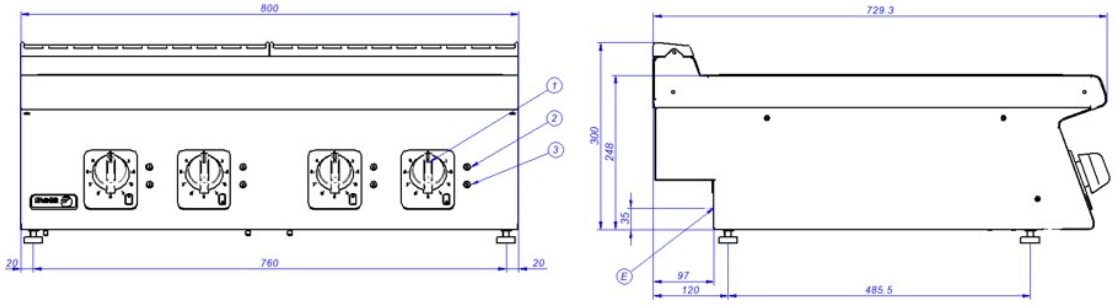

E – Conexión eléctrica	Electrical connection	Connexion électrique
1 – Mando eléctrico	Electric control	Commande électrique
2 – Piloto verde	Green pilot	Lumière verte
3 – Piloto ámbar	Ambar pilot	Lumière ambre