

apuro

Crepe Maker

Instruction manual



Model
CC039-A

Safety Tips

- Position the appliance on a flat, stable surface.
- A service agent/qualified technician should carry out installation and any repairs if required. Do not remove any components on this product.
- Consult Local and National Standards to comply with the following:
 - Health and Safety at Work Legislation
 - Fire Precautions
 - IEE Wiring Regulations
 - Building Regulations
- DO NOT immerse the appliance in water.
- DO NOT touch the top of the appliance when in use. Surfaces are hot!
- DO NOT obstruct or cover the appliance in any way when in use.
- DO NOT use an extension cable to power the appliance.
- Always switch off the appliance, disconnect the power supply and allow to cool before cleaning or carrying out maintenance.
- Always switch off and disconnect the power supply to the appliance when not in use.
- Keep all packaging away from children. Dispose of the packaging in accordance to the regulations of local authorities.
- If the power cord is damaged, it must be replaced by a Apuro agent or a recommended qualified technician in order to avoid a hazard.
- This appliance is not attended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience or knowledge, unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety

Introduction

Please take a few moments to carefully read through this manual. Correct maintenance and operation of this machine will provide the best possible performance from your Apuro product.

Pack Contents

The following is included:

- Apuro Crepe Maker
- Wooden Spreader
- Wooden Spatula
- Instruction Manual

Apuro prides itself on quality and service, ensuring that at the time of packaging the contents are supplied fully functional and free of damage.

Should you find any damage as a result of transit, please contact your Apuro dealer immediately.

Operation

The appliance can be turned On or Off using the Temperature knob on the base.

Seasoning the Hot Plate

1. Before using for the first time the cooking surface needs to be seasoned. This will create a 'non-stick' surface on the hot plate.
2. Ensure the cooking surface is clean.
3. Brush the surface with cooking oil.
4. Connect the appliance to the mains power supply.
5. Set the thermostat to 110°C and turn the appliance On. The power indicator light turns on.
6. Once the appliance reaches temperature the power indicator light turns off.
7. Turn the appliance Off and allow to cool before wiping away any excess oil.
8. The appliance is now ready to use. Repeat as necessary throughout the life of the appliance.

Making Crepes

1. Connect the appliance to the mains power supply.
2. Set the Temperature knob to the desired temperature. The power indicator light comes on.
3. Once the appliance reaches the set temperature the power indicator light turns off.
4. Pour the required amount of batter mixture on to the hot plate.
5. Spread the mixture in a circular motion around the hotplate with the spreader **[Fig. 1]**.
6. Cook on one side before flipping with the spatula to cook the other side of the crepe.

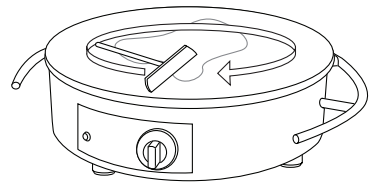


Fig. 1

Cleaning, Care & Maintenance

- A Apuro dealer or qualified technician should carry out repairs if required.
- Always switch off the appliance, disconnect the power supply and allow to cool before cleaning or performing maintenance.
- If necessary wipe the exterior with a soft cloth and warm soapy water.
- Dry thoroughly after cleaning.

Troubleshooting

If your Apuro appliance develops a fault, please check the following table before making a call to the Helpline.

Fault	Probable Cause	Action
The appliance is not working	The appliance is not switched on	Check the appliance is plugged in correctly and switched on
	Plug and lead are damaged	Call Apuro agent or qualified technician
	Fuse in the plug has blown	Replace the plug fuse
	Power supply	Check power supply
	Internal wiring fault	Call Apuro agent or qualified technician
	Heating element has expired	Call Apuro agent or qualified technician

Technical Specifications

Model	Voltage	Power	Current	Cooking Surface Diameter	Temperature Range	Dimensions h x w x d (mm)	Weight
CC039-A	230V 50Hz	2900W	12.6A	410mm	60-300°C	140 X 550 X 456	17.6kg

Electrical Wiring

The plug is to be connected to a suitable mains socket.

This appliance is wired as follows:

- Live wire (coloured brown) to terminal marked L
- Neutral wire (coloured blue) to terminal marked N
- Earth wire (coloured green/yellow) to terminal marked E

This appliance must be earthed, using a dedicated earthing circuit.

If in doubt consult a qualified electrician.


Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being required they must be readily accessible.

Compliance

The WEEE logo on this product or its documentation indicates that the product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment, the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.

Apuro parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities.

Apuro products have been approved to carry the following symbol:



All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of Apuro.


Every effort is made to ensure all details are correct at the time of going to press, however, Apuro reserve the right to change specifications without notice.

NOTES

DECLARATION OF CONFORMITY

Equipment Type	Crepe Maker
Model	CC039-A
Legislation	C-Tick
	AS/NZ 3820 Essential Safety Requirements for Low Voltage
	Electrical Equipment
Standards	EN 55014-1:2006+A1: 2009+A2: 2001
	EN 61000-3-2: 2006+A1:2009+A2:2009
	EN 61000-3-3:2008
	EN 55014-2:1997+A1: 2001+A2: 2008
	EN 60335-2-38:2003+A1:2008
	EN 60335-1:2002+A11:2004+A1:2004+A12:2006+A2:2006
	EN 50366:2003+A1:2006
Producer Name	Apuro
Producer Address	15 Badgally Road, Campbelltown, NSW 2560

I, the undersigned, hereby declare that the equipment specified above conforms to the above Legislation and Standard(s).

Date	05/09/14
Signature	
Full Name	Richard Cromwell
Position	Commercial Director

apuro