CPM DG 2-18

Double pan automatic pasta cooker direct gas heating



BROTHS RICE PASTA FISH MEAT EGGS VEGETABLES LEGUMES

PASTA MACHINES FOR LARGE-SCALE CATERING

This range of machines for large-scale catering consists of 21 models, with one or two tanks, from 120 to 240 litres, all equipped with individual baskets. The flexibility of the MULTICOOKER pasta cooker facilitates the traditional cooking of pasta in water ensuring speed and safety of working cycles, constant product quality and the best use of human resources.

FLEXIBLE AND FUNCTIONAL COOKERS FOR RESTAURANTS

The flexibility of the Multicooker automatic pasta machine allows it to be used for a large part of the traditional systems of cooking in water: the cooking of pasta, rice, soups, white and red meat, vegetables, etc.

Heating type	direct gas	
Capacity (L)	188 + 188	
Surface (dmq)	-	
Gas connection (Ø)	3/4"	
Electric connection (V/~/Hz)	1N+PE AC 230V 50Hz	

Width (mm)	2000	
Depth (mm)	900	
Height (mm)	900	
Gas power (Mj/hr)	129.6 + 129.6	
Electric power (kW) 0.4 + 0.4		


boiling | braising | pasteurising | tilting | mixing | cooling | frying | underpressure | vacuum cooking | cutting | washing | drying



Scots Ice Australia Foodservice Equipment 5/175 James Ruse Drive, Rosehill NSW 2142 - Free Call: 1800 222 460 Email: info@scotsice.com.au - Website: www.scotsice.com.au



CPM DG 2-18

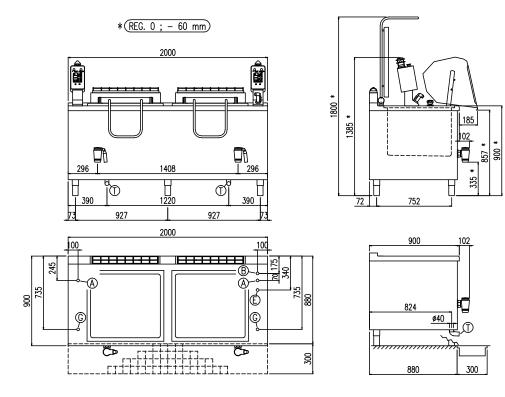

G	Attacco Gas (secondo ISO 7-1)	Gasanschuluss (ISO 7-1)	3/4"
	Gas Connection (ISO 7-1)	Raccordement Gaz (ISO 7-1)	3/4
E	Potenza assorbita	Elektrische Leistung	90 (LW)
	Electric power	Puissance électrique	.80 (kW)
E	Collegamento Elettrico	Elektrische Verbindung	220 2401/ 1N 504-
	Electric connection	Connexion électrique	220-240V 1N ~ 50Hz
Α	Allacciamento Acqua Calda	Warmwasseranschluss	1/01
	Hot water inlet	Raccordement eau chaude	1/2"

boiling | braising | pasteurising | tilting | mixing | cooling | frying | underpressure | vacuum cooking | cutting | washing | drying



