Single pan automatic pasta cooker indirect steam heating



BROTHS

RICE

PASTA

FISH

MEAT

EGGS

VEGETABLES

LEGUMES

PASTA MACHINES FOR LARGE-SCALE CATERING

This range of machines for large-scale catering consists of 21 models, with one or two tanks, from 120 to 240 litres, all equipped with individual baskets. The flexibility of the MULTICOOKER pasta cooker facilitates the traditional cooking of pasta in water ensuring speed and safety of working cycles, constant product quality and the best use of human resources.

FLEXIBLE AND FUNCTIONAL COOKERS FOR RESTAURANTS

The flexibility of the Multicooker automatic pasta machine allows it to be used for a large part of the traditional systems of cooking in water: the cooking of pasta, rice, soups, white and red meat, vegetables, etc.


Heating type	indirect steam	
Capacity (L)	242	
Surface (dmq)	-	
Gas connection (Ø)	-	
Electric connection (V/~/Hz)	1N+PE AC 230V 50Hz	

Width (mm)	1200
Depth (mm)	900
Height (mm)	900
Gas power (Mj/hr)	-
Electric power (kW)	0.4

boiling | braising | pasteurising | tilting | mixing | cooling | frying | underpressure | vacuum cooking | cutting | washing | drying





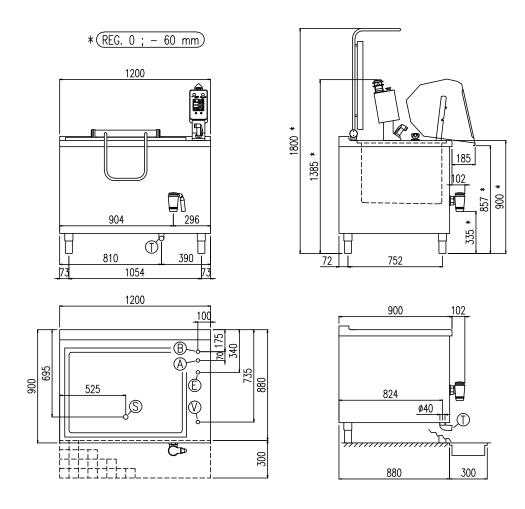

Е	Potenza assorbita	Elektrische Leistung	.40 (kW)	
	Electric power	Puissance électrique		
_	Collegamento Elettrico	Elektrische Verbindung	220 240V 1N FOU-	
E	Electric connection	Connexion électrique	220-240V 1N ~ 50Hz	
W	Allacciamneto Vapore	Dampfanschluss	4"	
V	Steam connection	Connexion vapeur	I"	
_	Scarico Condensa	Kondenswasserablauf	3/4"	
S	Condensate drain	Sortie du condenseur		
Α	Allacciamento Acqua Calda	Warmwasseranschluss	1/011	
Α	Hot water inlet	Raccordement eau chaude	1/2"	

boiling | braising | pasteurising | tilting | mixing | cooling | frying | underpressure | vacuum cooking | cutting | washing | drying



