

Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
SEQ-60-4 380-415V

19107720 10/05/2024


DENOMINATION:

Ultrafast electric salamander 400 V - 3+N independent range

DESCRIPTION :

- Perfect cooking uniformity, guaranteed by the redesigned deflectors and a
perfect positioning.
- 20 seconds to reach maximum temperature from ignition; max. 5 seconds already in operation.
- Removable chrome-plated steel juice collection trays and grids with athermic
handles.
- Rounded corners and adjustable feet.
- Wall mounting possible.
- Redesigned control panel for maximum functionality.
- Insulated handle with bakelite spacer and improved shielding of external
surfaces.
- The contact models contain a plate detection bar for automatic on and off
switching.

DIMENSIONS



X Width	600 mm	X Gross width	710 mm
Y Depth	480 mm	Y Gross depth	610 mm
Z Height	525 mm	Z Gross height	710 mm
Net Weight	52,0 kg	Gross Weight	61,0 kg
Net volume	0,151 m3	Gross volume	0,308 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	4,000 kW
Amperage (A)	10 A
Voltage	380-415V - 3N
Electric frequency	50/60Hz

CONNECTIONS TECHNICAL SPECIFICATIONS


230 V three-phase wiring	5X1,5MM2
Single-phase 230V wiring	2X2,5 +T
Three-phase +N 400V wiring	4X1,5 + T





Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
SEQ-60-4 380-415V

19107720 10/05/2024

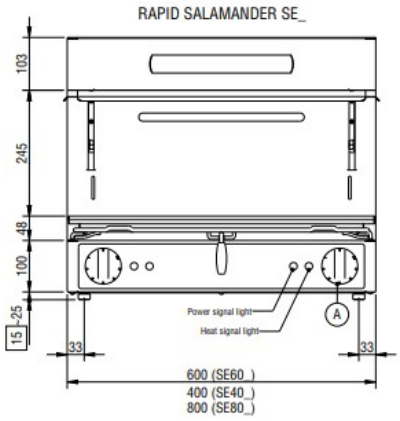

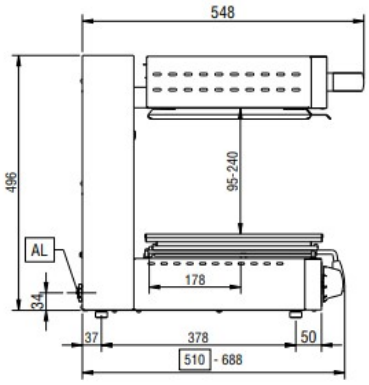

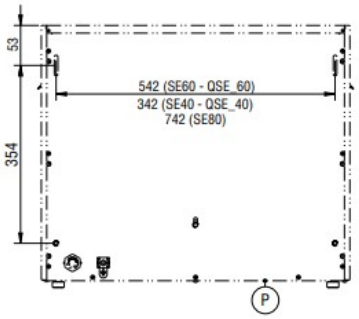

Schema di foratura parete in calcestruzzo per fissaggio staffe
Diagram for drilling cement walls for the fastening of brackets
Schema für Betonwandbohrungen zur Befestigung der Wandhalterungen
Schéma de perçage de la paroi en béton pour fixer les étriers
Esquema de perforacion de la pared de hormigón para fijación soportes

