

Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
SEQ-60-4T 380-415V 50/60Hz

19107717 10/05/2024


DENOMINATION:

Ultra-fast electric salamander 400 V - 3+N independent range

DESCRIPTION :

- Perfect cooking uniformity, guaranteed by the redesigned deflectors and a
perfect positioning.
- 20 seconds to reach maximum temperature from ignition; max. 5 seconds already in operation.
- Removable chrome-plated steel juice collection trays and grids with athermic
handles.
- Rounded corners and adjustable feet.
- Wall mounting possible.
- Redesigned control panel for maximum functionality.
- Insulated handle with bakelite spacer and improved shielding of external
surfaces.
- The contact models contain a plate detection bar for automatic on and off
switching.

DIMENSIONS



X Width	600	mm	X Gross width	710	mm
Y Depth	480	mm	Y Gross depth	610	mm
Z Height	525	mm	Z Gross height	720	mm
Net Weight	53,6	kg	Gross Weight	61,6	kg
Net volume	0,151	m3	Gross volume	0,312	m3

ELECTRICITY TECHNICAL SPECIFICATIONS


Electric power	4,000 kW
Voltage	380-415V
Electric frequency	50/60Hz





Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
SEQ-60-4T 380-415V 50/60Hz

19107717 10/05/2024

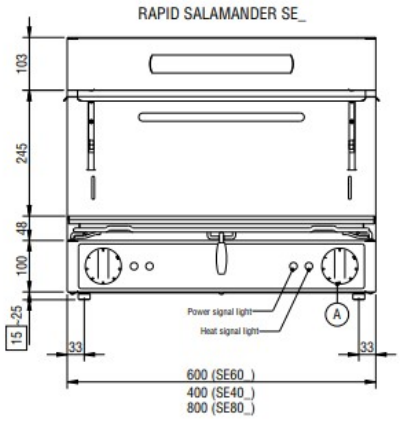

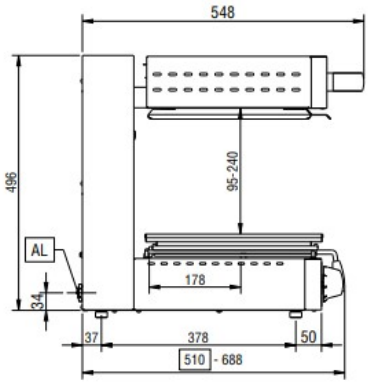

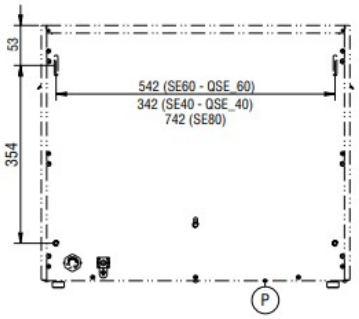

Schema di foratura parete in calcestruzzo per fissaggio staffe
Diagram for drilling cement walls for the fastening of brackets
Schema für Betonwandbohrungen zur Befestigung der Wandhalterungen
Schéma de perçage de la paroi en béton pour fixer les étriers
Esquema de perforacion de la pared de hormigón para fijación soportes

