

**Catalogue**
FOOD SERVICE
**Chapter**
DISHWASHING

**Specific model**
WLP-130 400V 3N 50Hz

19111099 01/04/2025

**DENOMINATION:**

Utensil washer for 1320x700 basket with rinse pump, drain pump and detergent dispenser.


**DESCRIPTION :**

INTERFACE
- 5"" backlit colour LCD display.
- Colour-coded status indicators, keeping the operator informed from a distance.
- Display of operating parameters, such as tank temperature and boiler temperature or number of cycles completed. The user can regulate the tank and boiler temperature or dose the detergent and rinse aid.
- Self-diagnosis and fault signalling.
- Power-saving mode (stand-by): By reducing the temperature of the water in the boiler and tank when the machine is not in operation, power consumption and limescale deposition on the heating element are likewise reduced.

CONSTRUCTION DETAILS
- The machine is built with integral double-skin.
- Soundproofed and heat-resistant double-skin door.
- Dual-flow wash pumps: one input and two outputs, one for each arm, without the need to split the flow to avoid power loss and reduce noise.
- Rinse pump as standard:
 · Rinse even at low mains pressure (1 bar). Water is drawn from the boiler through a booster pump and sent to the rinse nozzles of the machine. This system, being independent of mains pressure, thanks to the presence of the ""Air Break"", leads to lower water consumption and therefore lower energy consumption.
 · The temperature of the water in the boiler is constant throughout the rinse, as this water has not been mixed with cold mains water during the refilling phase.
- Standard peristaltic rinse aid and detergent dosing device for exact dosing.
- Thermostop: Starts the rinse when the rinse temperature required for a hygienic wash result and correct drying of the dishes has been reached.
- Drain pump as standard, which makes it possible to achieve:
 · Volumetric rinsing: partial draining of the dirty wash water before rinsing to avoid unnecessary waste of detergent and energy by slower soiling of the water.
 · Self-cleaning: complete self-cleaning cycle that avoids the risk of bacterial proliferation when activated; the machine completely discharges the water from the tank.
- Stainless steel tank surface filter, retains coarse dirt.
- Polypropylene pump suction filter that blocks the lightest dirt, protecting the wash pump.
- The tank is stamped and inclined for complete drainage. The washing chamber is free of interior pipes, edges and holes where dirt can accumulate.
- Polypropylene waste collection basket filter, which is in an easily accessible position so that the operator can remove and empty it in a few seconds.
- Counter-balanced, cushioned door for easy opening and closing.
- Lower and upper ""3-spoke"" stainless steel wash arms.
- 2 wash and rinse pumps.

PROGRAMMES
- Standard programmes:
 · Professional 2: 120s (6 l/cycle. Wash Tª: 55ºC. Rinse Tª: 80ºC)

**DIMENSIONS**




| | | | |
|---|---|---|---|
| X Width | 1465 mm | X Gross width | 1630 mm |
| Y Depth | 857 mm | Y Gross depth | 980 mm |
| Z Height | 1959 mm | Z Gross height | 2230 mm |
| Net Weight | 301,0 kg | Gross Weight | 317,0 kg |
| Net volume | 2,366 m3 | Gross volume | 3,562 m3 |

**ELECTRICITY TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Electric power | 15,900 kW |
| Voltage | 400V |
| Phases | 3N |
| Electric frequency | 50Hz |
| Amperage (A) | 32A |
| Engine power | 5,40 kW |
| Heating power | 10,50 kW |

**WATER TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Pressure | H2O: 100-600 kPa (1 - 6 bar) |

**CONNECTIONS TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Cold softened water 1 diameter | 3/4" |

**OTHERS**

| | |
|---|---|
| IPX | IPx4 |

**TECHNICAL FEATURES**

| | |
|---|---|
| Max.theor.product.(baskets/h) | 30 |
| Tank capacity | 131 L |
| Tank heater power | 10,50 kW |
| Washing pump power | 5,40 kW |
| Drain pump power | 0,10 kW |
| Boiler capacity | 17 L |
| Rinsing pump power | 0,400 kW |
| Boiler heater power | 10,50 kW |
| Type of heating (Alt./Sim.) | Alternate |



**Catalogue**
FOOD SERVICE
**Chapter**
DISHWASHING

**Specific model**
WLP-130 400V 3N 50Hz

19111099 01/04/2025

· Professional 4: 240s (8 l/cycle, Wash Tª: 60ºC, Rinse Tª: 82ºC)
· Professional 6: 360s (8 l/cycle, Wash Tª: 65ºC, Rinse Tª: 85ºC)
- Special programmes
- Self-cleaning programmes

**POSSIBLE ACCESSORIES :**

- BASKETS

**SUPPLIED ACCESSORIES:**

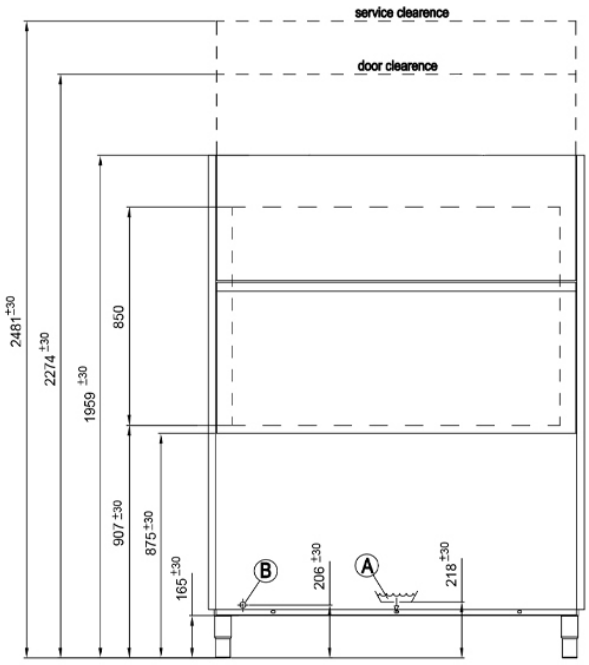
- 19011085 Basket for utensilewasher 1.320x700 mm 1

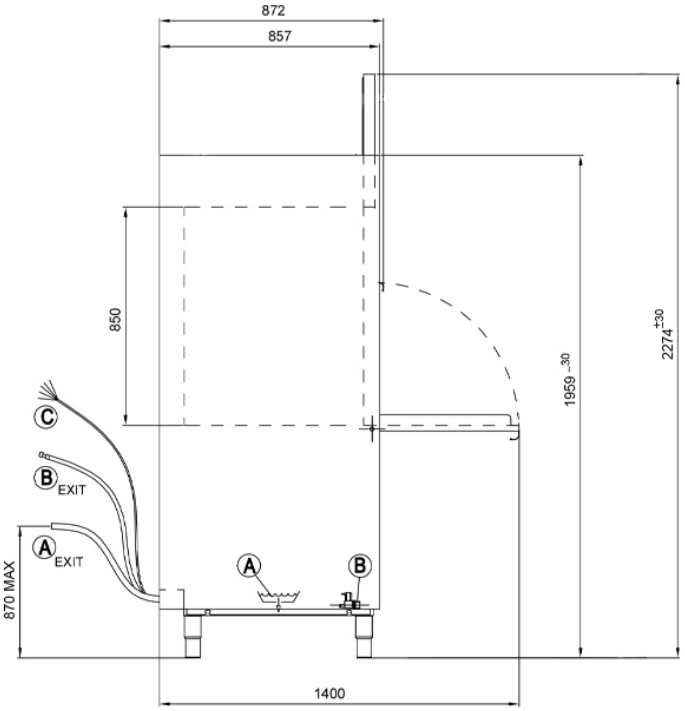


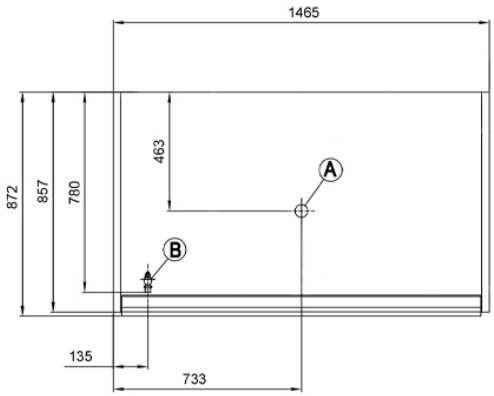
**Catalogue**
FOOD SERVICE
**Chapter**
DISHWASHING

**Specific model**
WLP-130 400V 3N 50Hz

19111099 01/04/2025




| | | | |
|---|---|---|---|
| A | ⌀ 50mm M | A EXIT | ⌀ 32 mm M |
| B | G 3/4" M | B EXIT | G 3/4" F |
| C | Power supply | | |