


Stainless Steel Upright Static Fridges

- 50mm high density insulation, CFC & HCFC free
- Stainless Steel exterior
- Digital temp. control & read-out
- Locking doors
- Castors on rear adjustable legs in front
- Internal corners are rounded for hygiene & easy cleaning
- Refrigerated into fix shelves for even cooling
- Regular defrosting is necessary
- Static Cooling for fridge, Static Cooling with fan for freezer
- Recessed Door Handle
- Natural and eco-friendly refrigerant

2+2 YEARS WARRANTY 4 YEAR WITH PRODUCT REGISTRATION



XR200SS

XR200SG






XR400SS


XR400SG



XR600SS

XR600SG

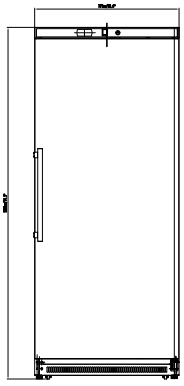

Code	GEMS Star Rating	Gross Capacity (L)	Net Capacity (L)	Shelf	Dimensions (WxDxH mm)	Weight (kg)	Temp. Range (˚C)	Ambient (°C)/RH%	Voltage (V)	Power (W/A)
S/S Door Fridges										
XR200SS	6	130	113	2	600x585x850	37	-2 to +8	30 / 55	240	198/10
XR400SS	4	368	357	4	600x585x1850	61	-2 to +8	30 / 55	240	300/10
XR600SS	6	588	554	4	777x695x1890	79	-2 to +8	30 / 55	240	442/10
Glass Door Fridges										
XR200SG	10	136	113	2	600x585x850	44	-2 to +8	25/ 60	240	205/10
XR400SG	8	386	379	4	600x585x1850	70	-2 to +8	25/ 60	240	372/10
XR600SG	10	613	573	4	777x695x1890	95	-2 to +8	25/ 60	240	462/10

Allow 100mm clearance for installation, all vents must be left clear.
Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ


Stainless Steel Upright Static Freezers


- 60mm high density insulation, CFC & HCFC free
- Stainless Steel exterior
- Digital temp. control & read-out
- Locking doors
- Rear castors
- Triple glazed Low-E doors for freezers
- with heated filament for clear viewing
- Rounded internal corners for hygiene & easy cleaning
- Refrigerated into fixed shelves for even cooling
- Front adjustable legs
- Regular manual defrosting is necessary
- Recessed Door Handle
- Natural and eco-friendly refrigerant

2+2 YEARS WARRANTY 4 YEAR WITH PRODUCT REGISTRATION*

XF200SS









XF200SG



XF400SS



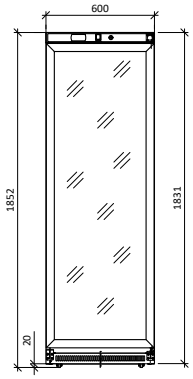





XF400SG



XF600SS



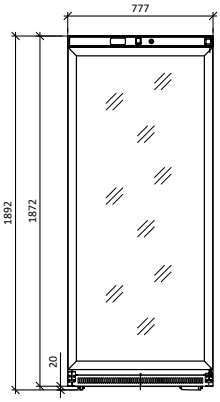



XF600SG



Code	GEMS Star Rating	Gross Capacity (L)	Net Capacity (L)	Shelves	Dimensions (WxDxH mm)	Weight (kg)	Temp. Range (˚C)	Ambient (°C)/RH%	Voltage (V)	Power (W/A)
S/S Door Freezers										
XF200SS	6	108	92	3	600x585x850	37	-22 to -18	30 / 55	240	302/10
XF400SS	6	325	304	6	600x585x1850	61	-22 to -18	30 / 55	240	384/10
XF600SS	7	580	538	6	777x695x1890	81	-22 to -18	30 / 55	240	450/10
Glass Door Freezers										
XF200SG	4	114	101	3	600x585x850	48	-22 to -18	25/ 60	240	332/10
XF400SG	6	343	326	6	600x585x1850	80	-22 to -18	25/ 60	240	478/10
XF600SG	5	605	568	6	777x695x1890	106	-22 to -18	25/ 60	240	656/10

Allow 100mm clearance for installation, all vents must be left clear.

Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ

Tropicalised Full-Width Interior Upright Fridges & Freezers

FULL-WIDTH STORAGE. NO CENTRE MULLION.

Designed for high-volume commercial kitchens and foodservice operations, our full-width upright fridges & freezers maximize storage capacity with a wide, unobstructed interior. Built tough for the regions, engineered for efficiency.

NO CENTRE MULLION
Full-width interior for more usable storage and easier access

MAXIMUM CAPACITY
Up to 30% more storage space compared to mullion-door models*

ENERGY EFFICIENT
R290 natural refrigerant with fan-forced cooling for lower running costs



KEY FEATURES

- Full-width interior design with no centre mullion
- Digital temperature controller with clear readout
- Wi-Fi controller supports remote monitoring, alerts & HACCP data export
- R290 natural refrigerant for energy efficiency and lower environmental impact
- Fan-forced cooling for even temperature distribution
- Automatic defrost for low maintenance
- 4 levels of shelving plus floor for generous storage
- Self-closing lockable doors to help reduce cold air loss
- Rounded internal corners for easy cleaning
- Self-evaporating drainage system
- CFC and HCFC-free insulation
- Heavy-duty locking castors for easy movement and stability
- Stainless steel construction for durability and hygiene

FULL-WIDTH UPRIGHT FRIDGES



FULL-WIDTH UPRIGHT FREEZERS



Code	Door	Gross Capacity (L)	Net Capacity (L)	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range (˚C)	Ambient (°C)/RH%	Voltage (V)	Power (W/A)
SFWC500	1	500	312	620x760x1980	106	+2 to +8	32/60	240	508/10
SFWF500	1	500	312	620x760x1980	126	-22 to -18	32/60	240	835/10
SFWC1000	2	1000	689	1220x760x1980	164	+2 to +8	32/60	240	815/10
SFWF1000	2	1000	689	1220x760x1980	182	-22 to -18	32/60	240	1238/10

Allow 100mm clearance for installation, all vents must be left clear.
Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ

Tropicalised Full-Width Interior Upright Fridges & Freezers

thermaster

FULL-WIDTH STORAGE. NO CENTRE MULLION.

Designed for high-volume commercial kitchens and foodservice operations, our full-width upright fridges & freezers maximize storage capacity with a wide, unobstructed interior. Built tough for the regions, engineered for efficiency.

2+2 YEARS WARRANTY 4 YEAR WITH PRODUCT REGISTRATION

NO CENTRE MULLION
Full-width interior for more usable storage and easier access

MAXIMUM CAPACITY
Up to 30% more storage space compared to mullion-door models*

ENERGY EFFICIENT
R290 natural refrigerant with fan-forced cooling for lower running costs




KEY FEATURES

- Full-width interior design with no centre mullion
- Digital temperature controller with clear readout
- Wi-Fi controller supports remote monitoring, alerts & HACCP data export
- R290 natural refrigerant for energy efficiency and lower environmental impact
- Fan-forced cooling for even temperature distribution
- Automatic defrost for low maintenance
- 4 levels of shelving plus floor for generous storage
- Self-closing lockable doors to help reduce cold air loss
- Rounded internal corners for easy cleaning
- Self-evaporating drainage system
- CFC and HCFC-free insulation
- Heavy-duty locking castors for easy movement and stability
- Stainless steel construction for durability and hygiene

NEW PRODUCT


FULL-WIDTH UPRIGHT FRIDGES



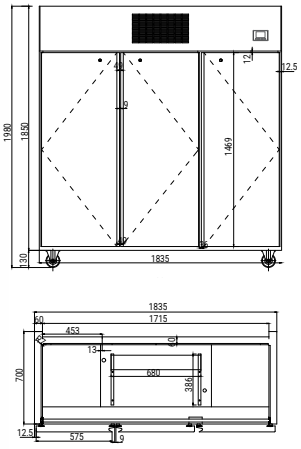

FULL-WIDTH UPRIGHT FREEZERS



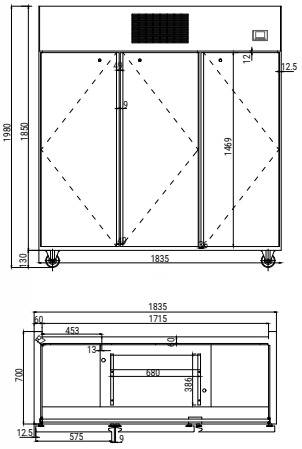

Code	Gross Capacity (L)	Net Capacity (L)	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range (˚C)	Ambient (°C)/RH%	Voltage (V)	Power (W/A)
3 Full Doors Fridge								
SFWC1500	1500	1069	1835x760x1980	106	+2 to +8	32/60	240	936/10
3 Full Doors Freezer								
SFWF1500	1500	1069	1835x760x1980	126	-22 to -18	32/60	240	1046/10

Allow 100mm clearance for installation, all vents must be left clear.
Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ

Tropicalised Full-Width Interior Upright Fridges & Freezers

FULL-WIDTH STORAGE. NO CENTRE MULLION.

Designed for high-volume commercial kitchens and foodservice operations, our full-width upright fridges & freezers maximize storage capacity with a wide, unobstructed interior. Built tough for the regions, engineered for efficiency.

NO CENTRE MULLION
Full-width interior for more usable storage and easier access

MAXIMUM CAPACITY
Up to 30% more storage space compared to mullion-door models*

ENERGY EFFICIENT
R290 natural refrigerant with fan-forced cooling for lower running costs

- Full-width interior design with no centre mullion
- Digital temperature controller with clear readout
- Wi-Fi controller supports remote monitoring, alerts & HACCP data export
- R290 natural refrigerant for energy efficiency and lower environmental impact
- Fan-forced cooling for even temperature distribution
- Automatic defrost for low maintenance
- 4 levels of shelving plus floor for generous storage
- Self-closing lockable doors to help reduce cold air loss
- Rounded internal corners for easy cleaning
- Self-evaporating drainage system
- CFC and HCFC-free insulation
- Heavy-duty locking castors for easy movement and stability
- Stainless steel construction for durability and hygiene.



FULL-WIDTH UPRIGHT FRIDGES



FULL-WIDTH UPRIGHT FREEZERS



Code	Gross Capacity (L)	Net Capacity (L)	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range (˚C)	Ambient (°C)/RH%	Voltage (V)	Power (W/A)
Single Door Fridges								
SFWCG500	500	312	620x760x1980	106	+2 to +8	32/60	240	508/10
Single Door Freezer								
SFWFG500	500	312	620x760x1980	126	-22 to -18	32/60	240	835/10
Double Door Fridges								
SFWCG1000	1000	689	1220x760x1980	164	+2 to +8	32/60	240	815/10
Double Door Freezer								
SFWFG1000	1000	689	1220x760x1980	182	-22 to -18	32/60	240	1238/10

Allow 100mm clearance for installation, all vents must be left clear.
Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ

Tropicalised Full-Width Interior Upright Fridges & Freezers

FULL-WIDTH STORAGE. NO CENTRE MULLION.

Designed for high-volume commercial kitchens and foodservice operations, our full-width upright fridges & freezers maximize storage capacity with a wide, unobstructed interior. Built tough for the regions, engineered for efficiency.

NO CENTRE MULLION
Full-width interior for more usable storage and easier access

MAXIMUM CAPACITY
Up to 30% more storage space compared to mullion-door models*

ENERGY EFFICIENT
R290 natural refrigerant with fan-forced cooling for lower running costs


- Full-width interior design with no centre mullion
- Digital temperature controller with clear readout
- Wi-Fi controller supports remote monitoring, alerts & HACCP data export
- R290 natural refrigerant for energy efficiency and lower environmental impact
- Fan-forced cooling for even temperature distribution
- Automatic defrost for low maintenance
- 4 levels of shelving plus floor for generous storage
- Self-closing lockable doors to help reduce cold air loss
- Rounded internal corners for easy cleaning
- Self-evaporating drainage system
- CFC and HCFC-free insulation
- Heavy-duty locking castors for easy movement and stability
- Stainless steel construction for durability and hygiene.



NEW PRODUCT


FULL-WIDTH UPRIGHT FRIDGES



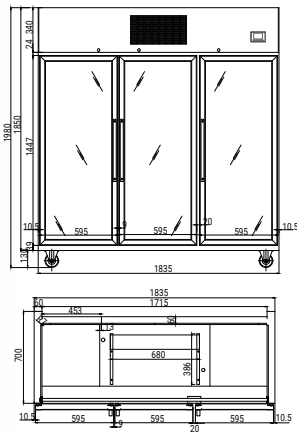

FULL-WIDTH UPRIGHT FREEZERS



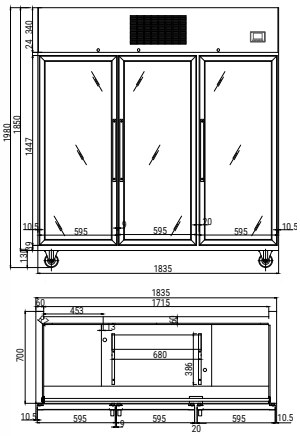

Code	Gross Capacity (L)	Net Capacity (L)	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range (˚C)	Ambient (°C)/RH%	Voltage (V)	Power (W/A)
Full Door Fridge								
SFWCG1500	1500	1069	1835x760x1980	106	+2 to +8	32/60	240	1080/10
Full Door Freezer								
SFWFG1500	1500	1069	1835x760x1980	126	-22 to -18	32/60	240	1705/10

Allow 100mm clearance for installation, all vents must be left clear.
Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ

Tropicalised Full-Width Interior Upright Fridges & Freezers

FULL-WIDTH STORAGE. NO CENTRE MULLION.

Designed for high-volume commercial kitchens and foodservice operations, our full-width upright fridges & freezers maximize storage capacity with a wide, unobstructed interior. Built tough for the regions, engineered for efficiency.

NO CENTRE MULLION
Full-width interior for more usable storage and easier access

MAXIMUM CAPACITY
Up to 30% more storage space compared to mullion-door models*


ENERGY EFFICIENT
R290 natural refrigerant with fan-forced cooling for lower running costs


- Full-width interior design with no centre mullion
- Digital temperature controller with clear readout
- Wi-Fi controller supports remote monitoring, alerts & HACCP data export
- R290 natural refrigerant for energy efficiency and lower environmental impact
- Fan-forced cooling for even temperature distribution
- Automatic defrost for low maintenance
- 4 levels of shelving plus floor for generous storage
- Self-closing lockable doors to help reduce cold air loss
- Rounded internal corners for easy cleaning
- Self-evaporating drainage system
- CFC and HCFC-free insulation
- Heavy-duty locking castors for easy movement and stability
- Stainless steel construction for durability and hygiene.


NEW PRODUCT

SFWCG500B / SFWFG500B



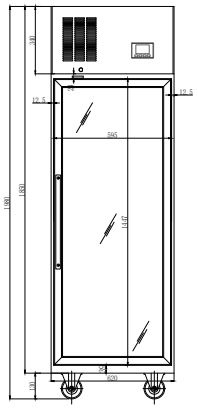


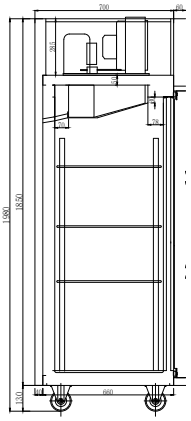





SFWFG1000B / SFWCG1000B



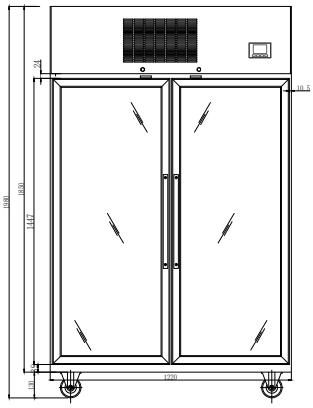

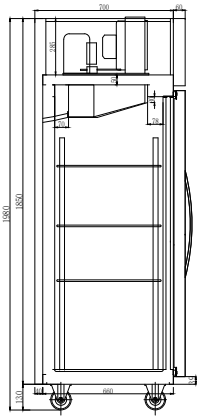



Code	Gross Capacity (L)	Net Capacity (L)	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range (˚C)	Ambient (°C)/RH%	Voltage (V)	Power (W/A)
Single Door Fridges								
SFWCG500B	500	312	620x760x1980	TBC	+2 to +8	32/60	240	380/10
Single Door Freezer								
SFWFG500B	500	312	620x760x1980	TBC	-22 to -18	32/60	240	835/10
Double Door Fridges								
SFWCG1000B	1000	689	1220x760x1980	TBC	+2 to +8	32/60	240	580/10
Double Door Freezer								
SFWFG1000B	1000	689	1220x760x1980	TBC	-22 to -18	32/60	240	1238/10

Allow 100mm clearance for installation, all vents must be left clear.
Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ