
EVO SELF-SERVE DISPLAY

- Ideal for placement in narrow spaces
- Efficient and reliable refrigeration system
- Easy installation
- Low energy consumption and low environmental impact
- Tempered double glazing side glass and air deflector glass
- Perforated back and interior ceiling for improved air circulation
- Removable lower display shelves
- 3 Stainless steel adjustable shelves
- Four LED lights (ceiling top + 3 shelves)
- Electronic control panel
- Off-cycle defrosting
- Suitable for displaying: Gastronomy, packaged snack and pastry, beverage, cold cut, dairy product
- Four lockable castors






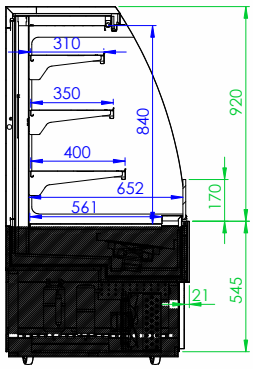


SEZIONE C-C


TDEVO-090S

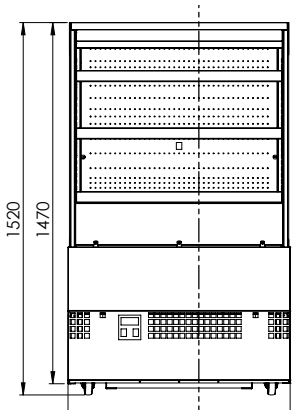

TDEVO-120S

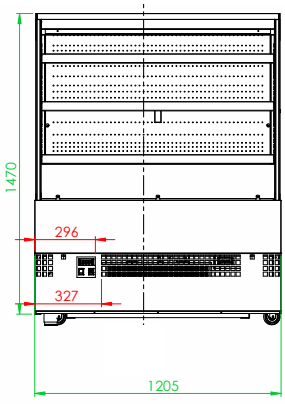

TDEVO-150S

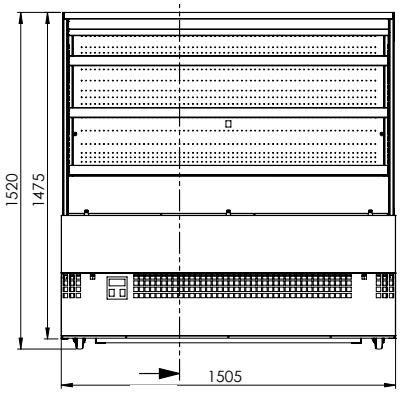

Code	Display Surface (m^2)	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range °C	Ambient/ RH%	Voltage	Power (kW/A)
TDEVO-090S	1.41	905x800x1520	165	+3 to +5	30/55	240	1.266/10
TDEVO-120S	1.94	1205x800x1520	195	+3 to +5	30/55	240	1.15/10
TDEVO-150S	2.43	1505x800x1520	239	+3 to +5	30/55	240	1.496/10

Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ