
STAINLESS STEEL SOLID DOOR UPRIGHT STATIC FRIDGES/FREEZERS


- 60mm (freezers) & 50mm (fridges) high density insulation, CFC & HCFC free
- Stainless Steel exterior
- Zanussi compressors
- Digital temp. control & read-out
- Locking doors
- LED lighting inside
- Castors on rear adjustable legs in front
- Internal corners are rounded for hygiene & easy cleaning
- Refrigerated into fix shelves for even cooling
- Regular defrosting is necessary


2+2 YEARS WARRANTY 4 YEAR WITH PRODUCT REGISTRATION

HR200 S/S / HF200 S/S












HR400 S/S / HF400 S/S



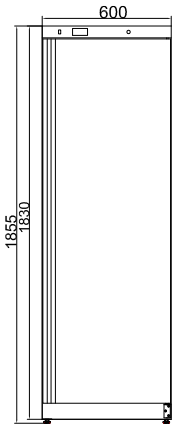


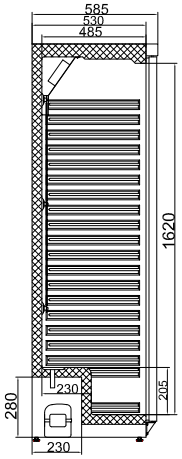





HR600 S/S / HF600 S/S



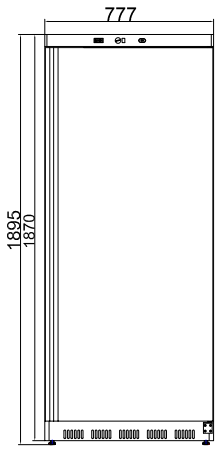

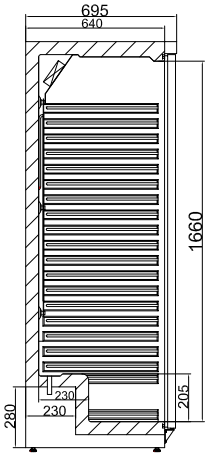



Code	GEMS Star Rating	Litre	Shelves	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range	Ambient/ RH%	Voltage	Power (W/A)
S/S door fridges									
HR200 S/S	7	129	2	600x600x855	44	-2 to +8	32/55	240	100/10
HR400 S/S	4	361	4	600x600x1850	74	-2 to +8	32/55	240	185/10
HR600 S/S	5	620	4	777x695x1895	97	-2 to +8	32/55	240	185/10
S/S door freezers									
HF200 S/S	9	129	3	600x600x855	44.5	-25 to -10	30/55	240	105/10
HF400 S/S	6	361	6	600x600x1850	79	-25 to -10	30/55	240	150/10
HF600 S/S	8	620	6	777x695x1895	101	-25 to -10	30/55	240	300/10

Allow 100mm clearance for installation, all vents must be left clear.

Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ