
STAINLESS STEEL GLASS DOOR UPRIGHT STATIC FRIDGES/FREEZERS


- 60mm (freezers) & 50mm (fridges) high density insulation, CFC & HCFC free
- Stainless Steel exterior
- Zanussi compressors
- Digital temp. control & read-out
- Locking doors
- Triple glazed Low-E doors for freezers with heated filament for clear viewing
- LED lighting inside
- Rounded internal corners for hygiene & easy cleaning
- Front adjustable legs
- Rear castors
- Refrigerated into fix shelves for even cooling (on freezer only)
- Regular defrosting is necessary

2+2 YEARS WARRANTY 4 YEAR WITH PRODUCT REGISTRATION*

HR200G S/S/ HF200G S/S










HR400G S/S / HF400G S/S



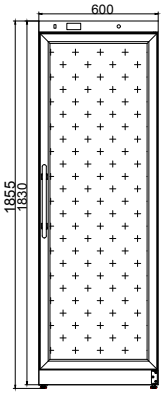


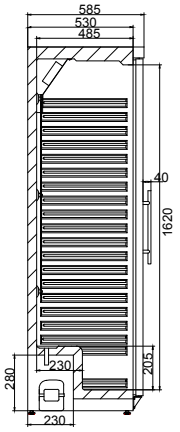





HR600G S/S / HF600G S/S



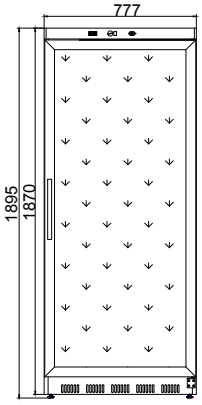

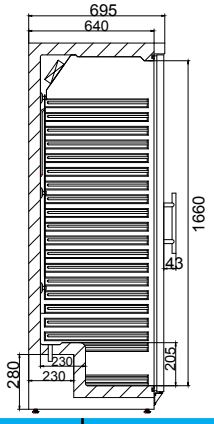



Code	GEMS Star Rating	Litre	Shelves	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range	Ambient/ RH%	Voltage	Power (W/A)
Glass door fridges									
HR200G S/S	9	150	3	600x600x855	44	+2 to +8	32/55	240	105/10
HR400G S/S	9	361	4	600x600x1850	69	+2 to +8	32/55	240	185/10
HR600G S/S	9	620	4	777x695x1890	90	+2 to +8	32/55	240	185/10
Glass door freezers									
HF200G S/S	8	140	2	600x600x850	44.5	-25 to -10	30/55	240	270/10
HF400G S/S	6	361	4	600x600x1850	76	-25 to -10	30/55	240	380/10
HF600G S/S	4	620	6	777x695x1890	94	-25 to -10	30/55	240	480/10

Allow 100mm clearance for installation, all vents must be left clear.

Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ