# REFRIGERATED WASTE COOLERS


- CFC free refrigerant and foam
- Insulation 40mm thickness
- Auto defrosting and auto evaporation of condensation water
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-closing door
- Magnetic gasket can be replaced without any tool
- Designed to accommodate 240 litre dustbin
- Monoblock unit







WBC1-240















WBC2-240

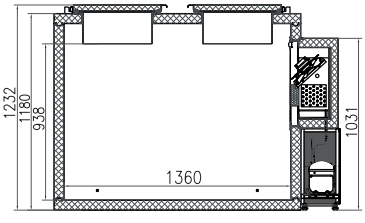




| Code | Litre | Dimensions (WxDxH mm) | Weight (kg) | Temperature Range | Ambient/ RH% | Voltage | Power (W/A) |
|---|---|---|---|---|---|---|---|
| WBC1-240 | 1x240 | 1090x920x1230 | 121 | +2 to +8 | 32/55 | 240 | 315/10 |
| WBC2-240 | 2x240 | 1810x920x1230 | 155 | +2 to +8 | 32/55 | 240 | 320/10 |

Allow 100mm clearance for installation, all vents must be left clear.

Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ