

## GAS BRATT PAN - MOTORISED TILTING 80 LT

### QUEEN9

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas kitchens having burners with various configurations and power ratings: 3.5 kW - 5.7 kW, 7 kW and 10 kW
- Double-ring burners for 7 and 10 kW models
- Wide range of accessories



### Technical / functional characteristics

- Water filled via solenoid valve
- Self-balanced lid with double steel wall
- Safety device interrupting power supply when tub is lifted
- Adjustable temperature from 100 to 280°C.
- Stable flame burner;
- Electric ignition
- Thermocouple safety valve

DIMENSIONS	
Width (mm)	800
Depth (mm)	900
Height (mm)	900
Gas connection (Ø)	1/2"
Electric connection (V/~ /Hz)	230V/1N 50 Hz
Cold water connection (Ø)	3/4"
Hot water connection (Ø)	

Cold soft water connection (Ø)	
Drain (Ø)	
Gas power (Mj/hr)	73.6
Electric power (kW)	0.2
Plate dimensions (mm)	
Tank capacity (L)	80
Tank dimensions (mm)	
Internal oven dimensions (mm)	

MODEL


Q90BR/GM80

CODE

CR1018209

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

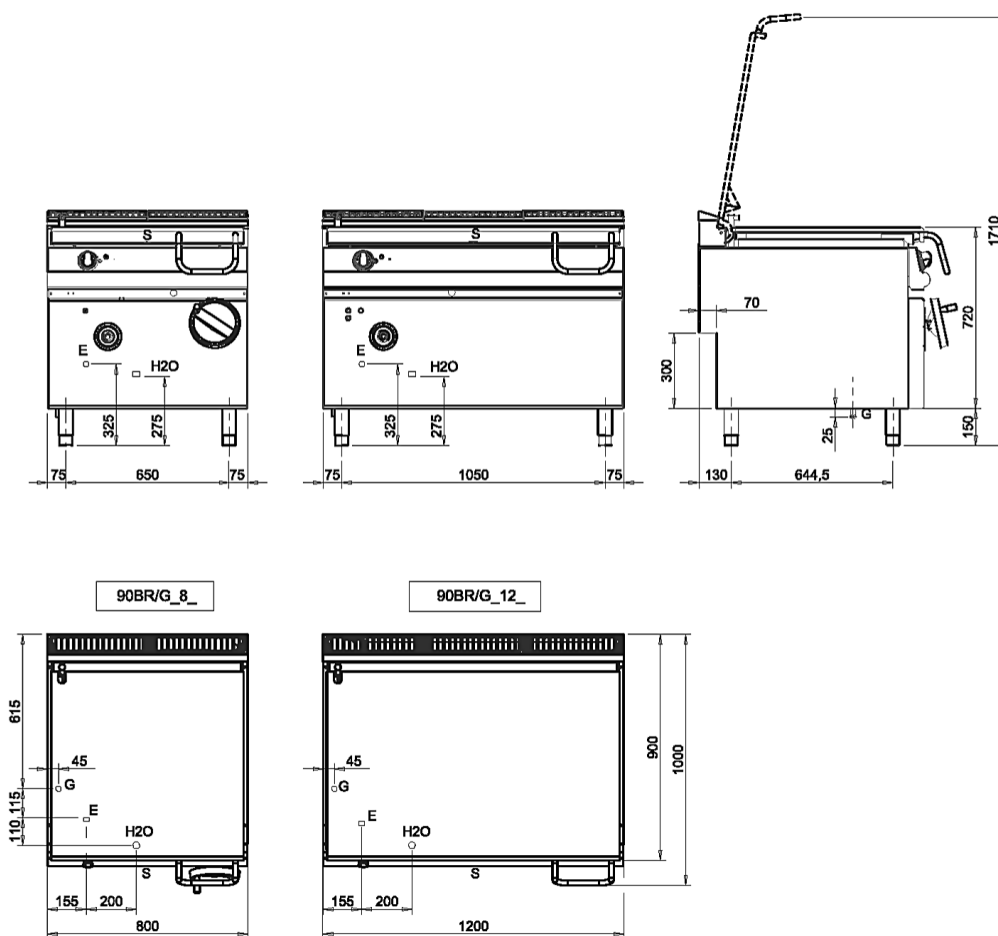

Legenda – Legende – Key – Légende – Leyenda – Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief – Presse étoupe de câble él  
Pisacable – Elektrische kabelwartel
- G** Attacco arrivo gas – Gasanschluss – Gas connection - Arrivée gaz – Union de gas – Gasaansluiting  
EN 10226-1 R ½; EN ISO 228-1 G ½ (DK)
- H2O** Attacco arrivo acqua – Wasseranschluss – Water inlet - Arrivée eau – Union de agua – Ater aansluiting  
EN ISO 228-1 G 3/4
- S** Scarico vasca – Wannenabflussrohr – Pan outlet - Vidange du bac – Descarga cuba – Water toevoer