

TUC-60D-2-HC

 Undercounter Foodservice Refrigerator, 2 Drawers + 1 Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	1534	Door Description	1 Solid Swing Door	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	766	Number of Drawers	2	Refrigerant	R290
External Height (mm)	839	Drawers location	Right (standard) or Left (option)	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Amps	1.3
Net Volume (Litres)	226	Interior Construction	Clear coated aluminium, stainless steel base	Wattage	299
Gross Volume (Litres)	439	Air Intake Position	Front	Climate Class	5
Supplied Shelves	2	Ventilation Position	Front	Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Shelf Size (L x D mm)	One 700 x 546 + One 700 x 349	Clearance Required	Zero back and sides	Testing Standard	EN 16825
Internal Net Height (mm)	630	Cord Length (Meters)	2.13	EEC	B
Per Drawer Capacity (max depth mm)	1x 1/1 GN (150)	Standard w/ Locks	Standard	EI	31.5
Unpackaged Weight (kg)	191			kWh/24hr	2.04
Packaged Weight (kg)	202			kWh/Annum	746
Packaged Dimensions (W x D x H mm)	1601 x 839 x 1207			Defrost Type	Auto
Supplied Supports	ø 64 mm castors (83 mm height) (reduced height option available, totals 810 mm)				



Specifications subject to change without notice.
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland **0800 783 2049**
EMEA **+41 61 563 07 05**
Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com




TUC-60D-2-HC

 Undercounter Foodservice Refrigerator, 2 Drawers + 1 Solid Swing Door

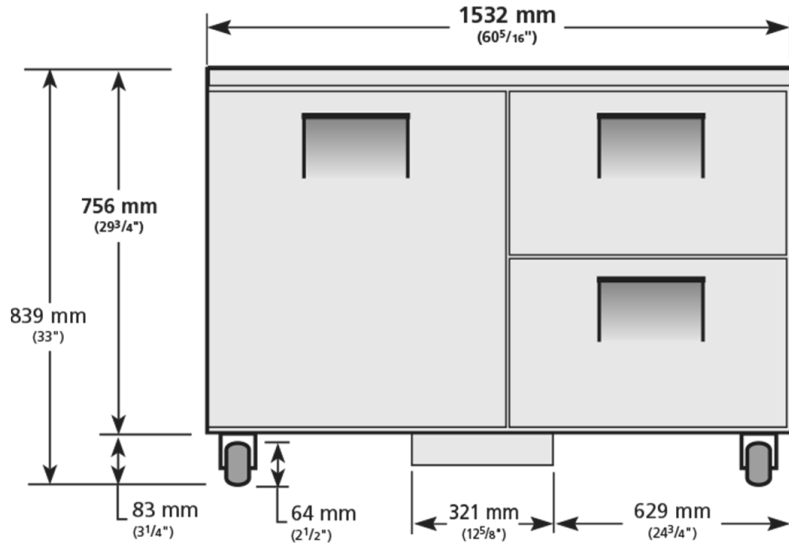

ELEVATION

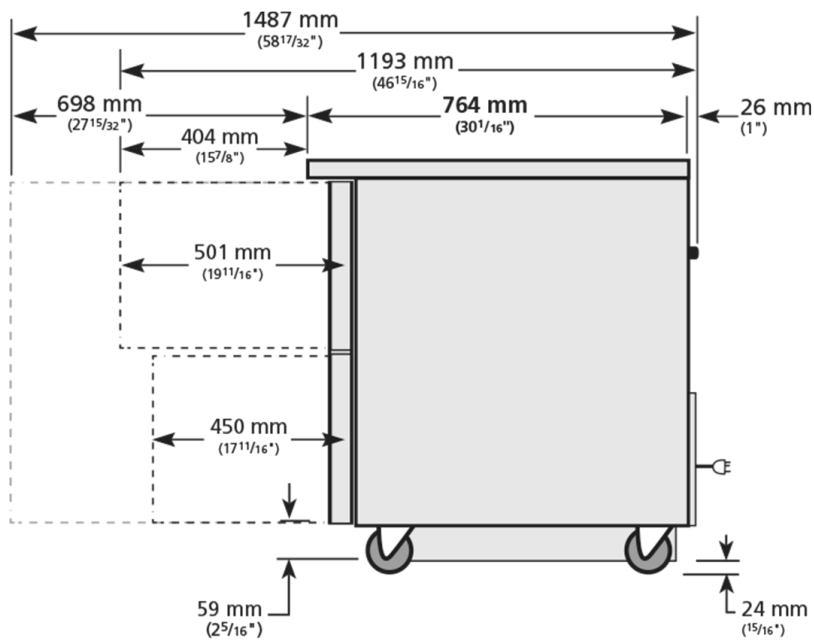

Specifications subject to change without notice.
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland **0800 783 2049**
EMEA **+41 61 563 07 05**
Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

