

Glass Door Display

TVM-36SL-HC~VM01

Visual Retail Merchandiser Refrigerator, 2 Glass Swing Doors, Reduced Height



Dimensions		Build		Technical	
External Width (mm)	915	Door Description	2 Full Glass Swing Doors	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	537	Exterior Construction	Black powder coated Stainless Steel front, Aluminium sides and rear (Grey colour option)	Refrigerant	R290
External Height (mm)	1397	Interior Construction	White coated aluminium, stainless steel base	Voltage / Frequency / Phase	220-240V/50Hz/1
Exclusions	Depth does not include 38 mm for door handle or 13 mm for rear access panel.	Air Intake Position	Front	Amps	1
Net Volume (Litres)	281	Ventilation Position	Rear	Wattage	230
Gross Volume (Litres)	365	Clearance Required	26 mm rear, zero sides	Temperature Class	M2
Display Area (m ²)	0.74	Cord Length (Meters)	3.05	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Supplied Shelves	4	Internal Lighting	LED	Testing Standard	EN 23953
Shelf Size (L x D mm)	807 x 375	Standard w/ Locks	Not Standard. Options available.	EEC	B
Internal Net Height (mm)	930			EEL	16.5
Unpackaged Weight (kg)	107			kWh/24hr	2.87
Packaged Weight (kg)	118			kWh/Annum	1048
Packaged Dimensions (W x D x H mm)	1083 x 750 x 1531			Defrost Type	Auto
Supplied Supports	Leg Levellers (Castors supplied separate)				



Specifications subject to change without notice. Technical data above related to energy use based on testing of 50Hz or Dual Frequency models Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)
EMEA [+41 61 563 07 05](tel:+41615630705)
Australia [+61 2 9619 9999](tel:+61296199999)


TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



Glass Door Display

TVM-36SL-HC~VM01

Visual Retail Merchandiser Refrigerator, 2 Glass Swing Doors, Reduced Height

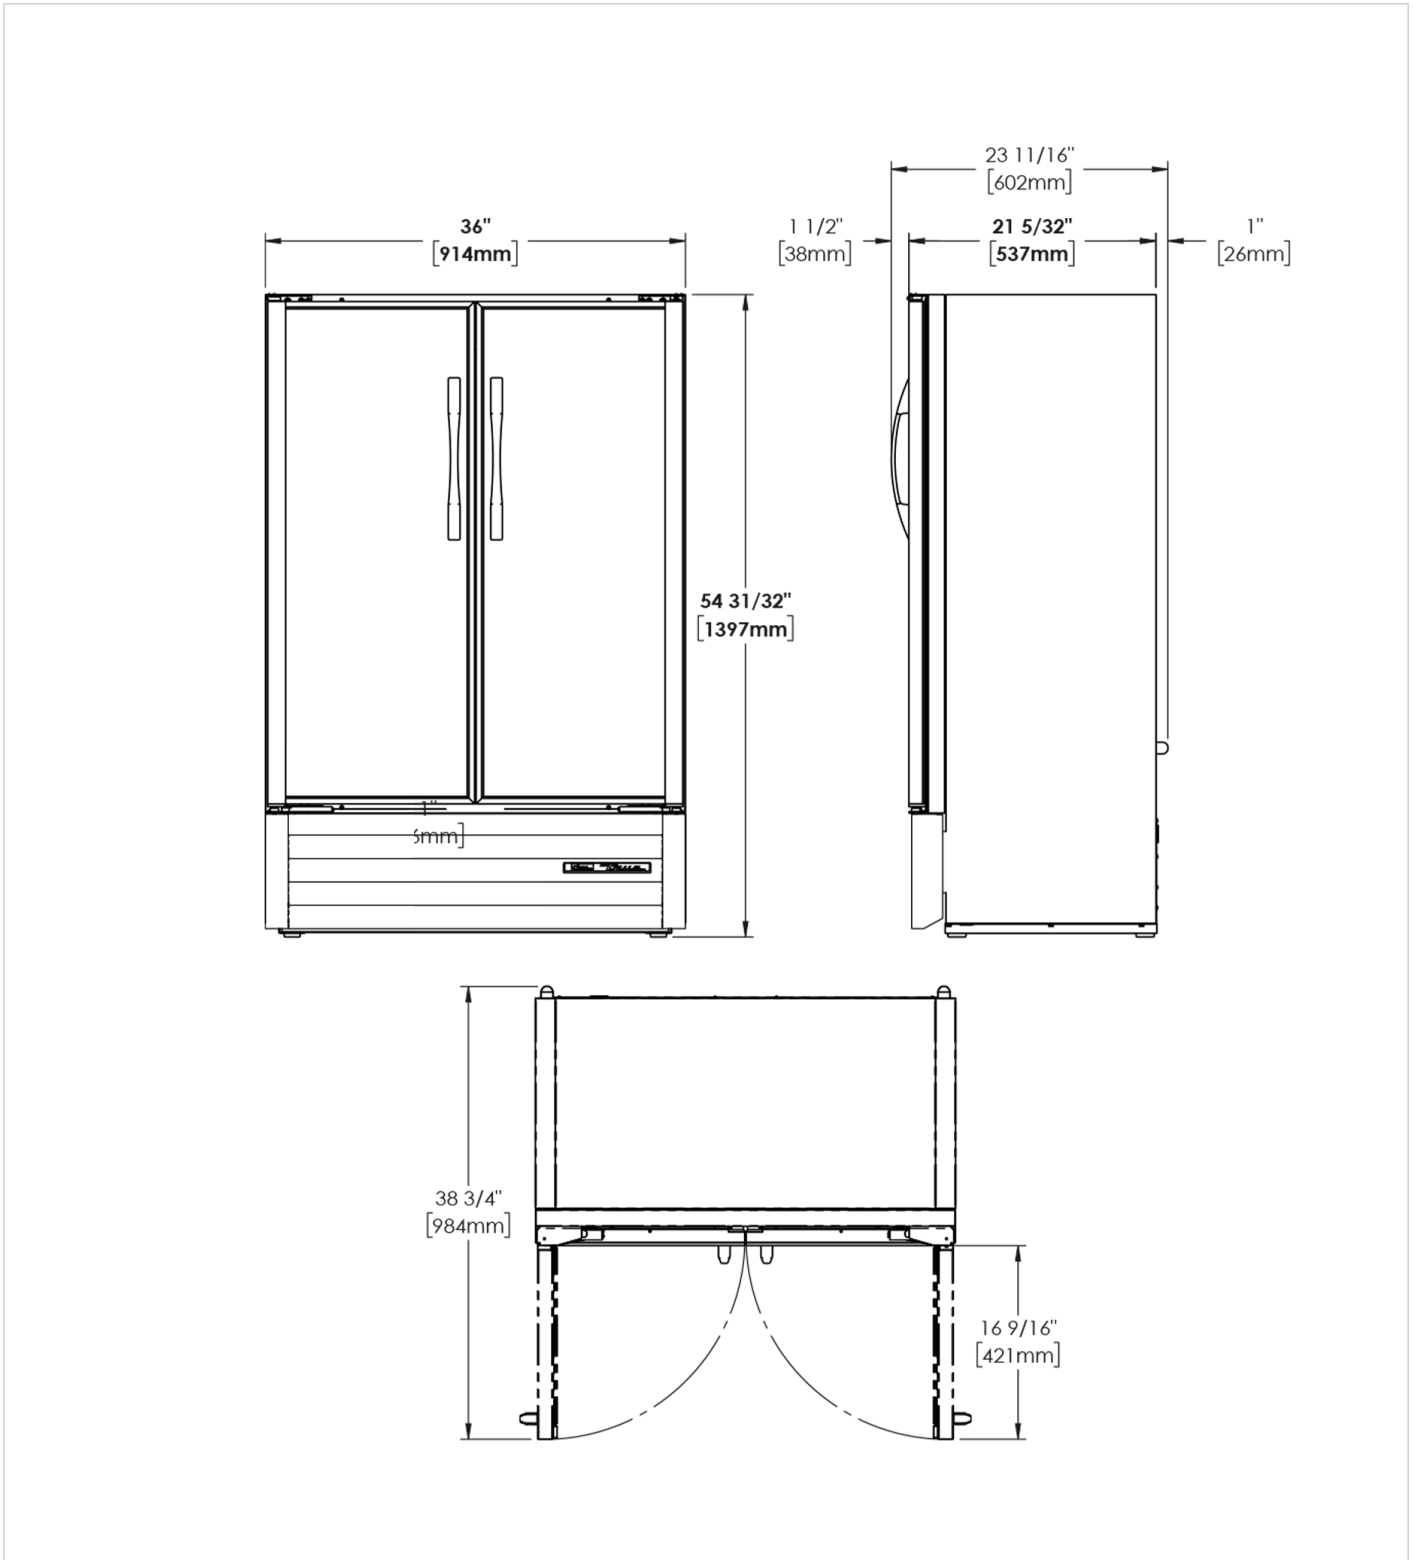

Specifications subject to change without notice.
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049
EMEA +41 61 563 07 05
Australia +61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

