Plumbing & Sanitary

AS1428 Compliant

AS1172.1 AS1172.2
23094

WATER RATING
www.waterrating.gov.au
3.3 litres average flush
4.4L per full flush / 3.0L per half flush
In accordance with AS/NZS 6400
Licence No. 1044
Dorotheus Pty Ltd

Stainless Steel Disabled Compliant Dual Flush Cistern

10 YEAR WARRANTY

AB-CIS-DCDF-SE-L *(LEFT SIDE ENTRY)*


AB-CIS-DCDF-SE-R *(RIGHT SIDE ENTRY)*

- AS1428 Compliant
- Water Saving Half Flush Feature
- Adjustable Inlet and Outlet Valves for Setting The Required Flushing Volume
- Constructed from High Quality 1.2mm 304 Grade Stainless Steel
- Reversible Inlet Valve - Suits Left or Right
- 50mm BSP Outlet




Left Side Entry Photo Shown


Top

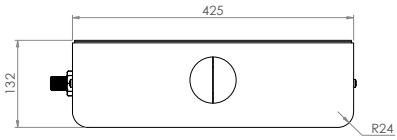

Front

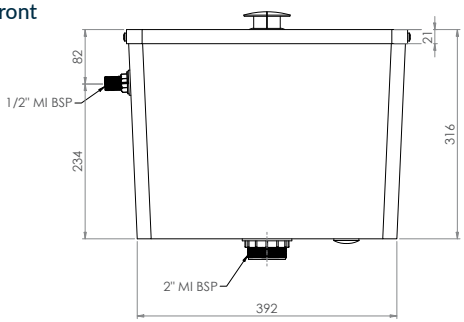

Side





P-CIS-INLET-SIDE ENT
(SIDE ENTRY INLET VALVE)

- 1/2" MI BSP



P-CIS-DF OUTLET
(DUAL FLUSH OUTLET VALVE)

- 50mm MI BSP

Refer to warranty for exclusions.