UNDERBENCH GLASS/DISH WASHER



- Stainless steel construction
- Electronic control
- Double skin door
- Rotating stainless steel wash & rinse arms
- Built in detergent pump
- Built in rinse aid injector

- Built in drain pump
- Wash cycle 90/120 sec
- Wash temperature 55-60°C
- Rinse temperature 82-90°C
- Water consumption per wash 2.54lts
- Built in non-return valve


- · Safety door switch fitted
- Adjustable legs
- Internal clearance 310mm
- Supplied with 1 x wire basket
- Watermark approved
- Small ware only







Combination Utility Rack for glasses, cups & saucers available on request

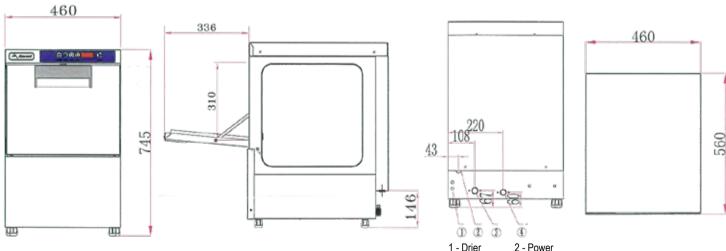

Code	Dimensions (WxDxH mm)	Weight (kg)	Voltage/Hz	Power (kW/A)
UCD-400	460x560x745	52.25	240/50	2.65/15
Double Skin Door & Wall				
UCD-400D	460x560x745	54.5	240/50	2.65/15

3 - Water inlet 4 - Water outlet