

KEY FEATURES

- Capacity of 80, 100 and 150 litre stainless steel pans.
- 10mm thick Duplex seamless stainless steel base provides improved heat retention, even heat and ease of cleaning.
- Electric tilt as standard (manual optional) on 80 and 100L models.
- Water fill tap as standard.
- Ergonomically designed counter balanced lid with heavy duty hinge.
- Heavy duty fully welded stainless steel frame ensures rigidity and durability.
- 12 months parts & labour warranty.
- 10 year parts availability guarantee.
- Australian born & bred.



TPG-150

MODELS

GAS

TPG-80

TPG-100

TPG-150

ELECTRIC

TPE-80


TPE-100

TPE-150



TPE-80


TPE-80 / TPG-80

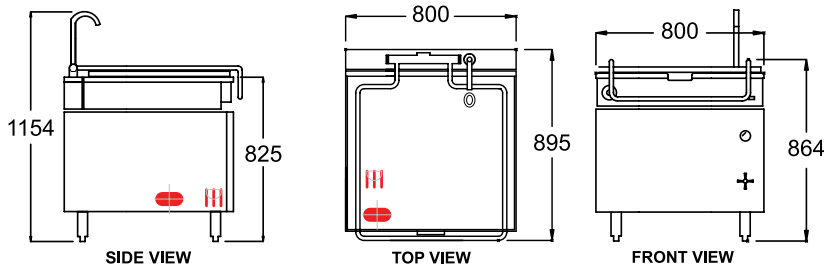

MODEL: TP-80 Specifications:

Dimensions (WxDxH):	800 x 895 x 864 mm
Working Height:	825 mm
Pan Size (WxDxH):	695 x 670 x 195 mm
Weight:	159 kg
Packed:	0.6 m ³
Gas or Electric Connection:	
Rating:	12 kW or 80 Mj
Capacity:	78 L


TPE-100 / TPG-100

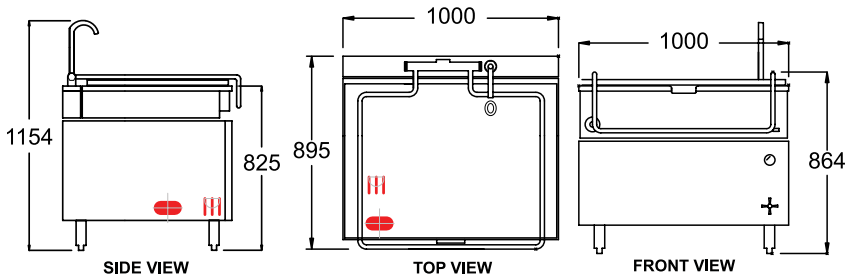

MODEL: TP-100 Specifications:

Dimensions (WxDxH):	1000 x 895 x 864 mm
Working Height:	825 mm
Pan Size (WxDxH):	895 x 670 x 195 mm
Weight:	180 kg
Packed:	0.8 m ³
Gas or Electric Connection:	
Rating:	18 kW or 100 Mj
Capacity:	100 L

TPE-150 / TPG-150

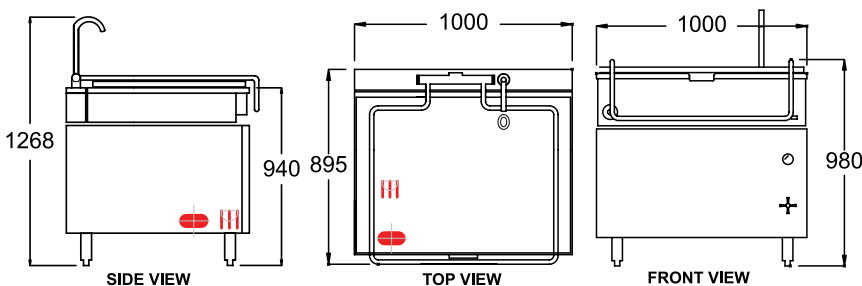

MODEL: TP-150 Specifications:

Dimensions (WxDxH):	1000 x 895 x 980 mm
Working Height:	940 mm
Pan Size (WxDxH):	895 x 670 x 305 mm
Weight:	180 kg
Packed:	0.9 m ³
Gas or Electric Connection:	
Rating:	18 kW or 100 Mj
Capacity:	150 L

 GAS INLET 3/4" BSP  415V, 3 PHASE POWER

Goldstein Eswood continually works on improving our products, so dimensions may change without notice. For any construction critical dimensions please check with us.

GOLDSTEIN ESWOOD
211 - 217 Woodpark Rd SMITHFIELD NSW 2164
T: 1800 013 123 F: 02 96045420
E: sales@goldsteineswood.com.au



QEC2900 2 NOVEMBER 2008
Certified System
Quality
Head Office
ISO 9001
FRAN GLOBAL