

KEY FEATURES

- Mild steel plate maximizes heat transfer to food.
- Stainless steel fascia and sides, spill zone and drip trays for ease of cleaning.
- Front grease trough, generous chute and catcher.
- Thermostat control available as an option.
- 12 months parts & labour warranty.
- 10 year parts availability guarantee.
- Australian born & bred.



GPEDB-24



GPEDB-36



GPEDB/ST-24


MODELS

GPEDB-24

GPEDB-36

GPEDB/ST-24


GPEDB-24

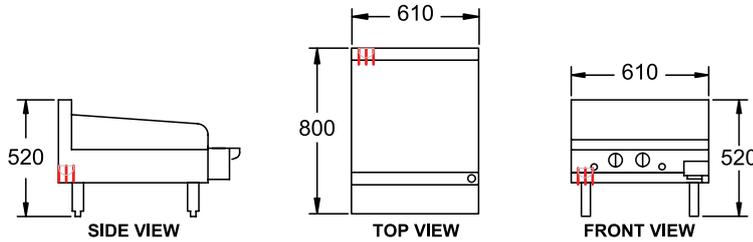

MODEL: GPEDB-24 Specifications:

Dimensions (WxDxH):	610 x 800 x 520 mm
Working Height:	300 mm
Plate Size (WxDxH):	610 x 520 x 12 mm
Plate Type:	Smooth Mild Steel
Electric Connection:	3 phase, 415V + N + E
Rating:	12 kW
Weight:	90 kg
Packed:	0.3 m ³


GPEDB-36

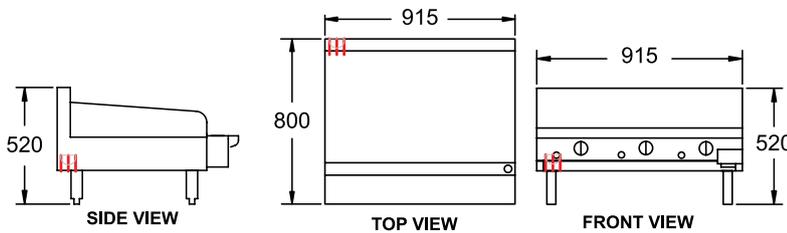

MODEL: GPEDB-36 Specifications:

Dimensions (WxDxH):	915 x 800 x 520 mm
Working Height:	300 mm
Plate Size (WxDxH):	915 x 520 x 12 mm
Plate Type:	Smooth Mild Steel
Electric Connection:	3 phase, 415V + N + E
Rating:	18 kW
Weight:	135 kg
Packed:	0.4 m ³

GPEDB/ST-24

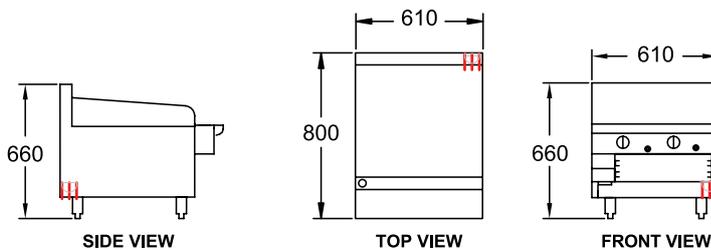

MODEL: GPEDB/ST-24 Specifications:

Dimensions (WxDxH):	610 x 800 x 660 mm
Working Height:	460 mm
Plate Size (WxDxH):	610 x 520 x 12 mm
Plate Type:	Smooth Mild Steel
Electric Connection:	3 phase, 415V + N + E
Rating:	6 kW
Weight:	100 kg
Packed:	0.3 m ³

- Other options:**
- Stand.
 - Thermostatic Control.
 - Stainless Steel Plate.
 - Ribbed Plate (Part or Whole).

▨ 415V, 3 PHASE POWER

Goldstein Eswood continually works on improving our products, so dimensions may change without notice. For any construction critical dimensions please check with us.

GOLDSTEIN ESWOOD
211 - 217 Woodpark Rd SMITHFIELD NSW 2164
T: 1800 013 123 F: 02 96045420
E: sales@goldsteineswood.com.au



DEC2900 2 NOVEMBER 2008
Certified System
Quality
Head Office
ISO 9001
TRAFFIC GLOBAL