



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 32kg production per 24/hr of medium ice cube.  
11.5kg storage bin.

Complete with legs, water & drain hoses + 1 ice scoop.  
10 AMP power supply.

266 mm drain height including legs to finished floor.



## ICE PRODUCTION



### Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°		<b>30</b>	<b>34</b>	<b>36</b>	<b>38</b>
50°		66	75	79	84
21°		<b>27</b>	<b>30</b>	<b>32</b>	<b>34</b>
70°		60	66	71	75
32°		<b>23</b>	<b>26</b>	<b>28</b>	<b>30</b>
90°		51	57	62	66
38°		<b>19</b>	<b>21</b>	<b>22</b>	<b>23</b>
100°		42	46	49	51

### Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°		<b>28</b>	<b>32</b>	<b>34</b>	<b>36</b>
50°		62	71	75	79
21°		<b>26</b>	<b>30</b>	<b>32</b>	<b>34</b>
70°		57	66	71	75
32°		<b>25</b>	<b>29</b>	<b>31</b>	<b>33</b>
90°		55	64	68	73
38°		<b>21</b>	<b>26</b>	<b>28</b>	<b>29</b>
100°		46	57	62	64


## CUBE TYPE



**20g weight**  
**BRIGHT CUBE**  
32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

## CONTROL PANEL



Start-standby Switch  
Status Led

## BIN CAPACITY

11.5 Kg - 25.3 lbs | 575 pcs

## DIMENSIONS

W x D x H (mm)

400 x 540 x 690/810

460 x 600 x 850

## OPERATING REQUIREMENTS

Rejected Heat 979 W

Air Volume 185 m<sup>3</sup>/h














220-240/50/1




R290 GWP = 3

MIN		MAX	
10°C (50°F)		40°C (104°F)	
5°C (41°F)		35°C (95°F)	
- 10 %		+ 10 %	
1 Bar (14 psi)		5 Bar (70 psi)	


## SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg lbs		 kg lbs		 Ton CO2 equiv.
<b>CS38 ZP A</b>		670	370	10	29.0	3.2	34	75	40	88	0
<b>CS38 ZP W</b>		670	290	10	20.3	43.2	34	75	40	88	0

Vista frontale  
Front view


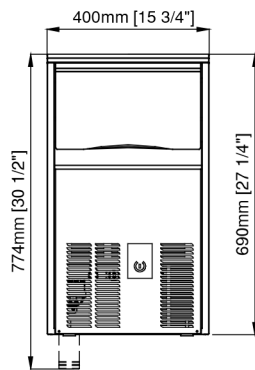


Vista laterale  
Lateral view



Kit 4 Feet Optional  
Kit 4 piedini Optional  
Ø50mm H100-120 mm

Vista superiore  
Top view

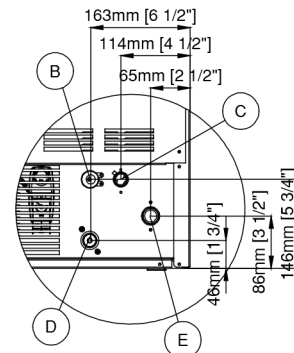

- (B)** Electrical cable supply / Ingresso alimentazione elettrica
- (C)** Water outlet connection / Attacco scarico acqua diam. 20 mm
- (D)** Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm
- (E)** Water inlet connection / Attacco entrata acqua - 3/4" gas

## R290