




Self contained ice maker with in-built water drain pump.  
 Up to 50kg production per 24/hr of medium ice cube.  
 22kg storage bin.  
 Complete with castors, water & drain hoses + 1 ice scoop.  
 10 AMP power supply.  
 Water discharge up to 12m away & 1.2m high.

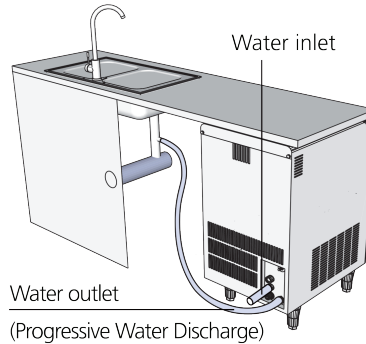

## ICE PRODUCTION



### Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		21°	15°	10°	
°F		70°	60°	50°	
10°	<b>47</b>	<b>49</b>	<b>50</b>	<b>52</b>	
50°	104	108	110	115	
21°	<b>41</b>	<b>43</b>	<b>45</b>	<b>47</b>	
70°	90	95	99	104	
32°	<b>33</b>	<b>35</b>	<b>37</b>	<b>39</b>	
90°	73	77	82	86	
38°	<b>27</b>	<b>30</b>	<b>32</b>	<b>34</b>	
100°	60	66	71	75	

### Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		21°	15°	10°	
°F		70°	60°	50°	
10°	<b>48</b>	<b>50</b>	<b>52</b>	<b>54</b>	
50°	106	110	115	119	
21°	<b>44</b>	<b>47</b>	<b>49</b>	<b>51</b>	
70°	97	104	108	112	
32°	<b>42</b>	<b>45</b>	<b>47</b>	<b>49</b>	
90°	93	99	104	108	
38°	<b>40</b>	<b>43</b>	<b>45</b>	<b>47</b>	
100°	88	95	99	104	

## CUBE TYPE



**20g weight**  
**BRIGHT CUBE**  
 32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

## CONTROL PANEL



Switch On/Off

Ice size regulation screw

## BIN CAPACITY

22 kg - 48.5 lbs | 1100 pcs

## DIMENSIONS

W x D x H (mm)

500 x 580 x 800/835

560 x 640 x 960

## OPERATING REQUIREMENTS

Rejected Heat 1750 W

Air Volume 310 m<sup>3</sup>/h
















220-240/50/1



R134a GWP = 1430

MIN		MAX	
10°C (50°F)		40°C (104°F)	
5°C (41°F)		35°C (95°F)	
- 10 %		+ 10 %	
1 Bar (14 psi)		5 Bar (70 psi)	

## SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
<b>CS50DP A</b>		1161	680	10	32.4	4.60	48	106	56	123	0.50
<b>CS50DP W</b>		1161	630	10	20.4	39.7	48	106	56	123	0.43

