



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 45kg production per 24/hr of medium ice cube.
22kg storage bin.


Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

180 mm drain height including legs to finished floor.




ICE PRODUCTION



Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°		42	49	53	54
50°		93	108	117	119
21°		35	41	45	46
70°		77	90	99	101
32°		32	38	42	43
90°		71	84	93	95
38°		28	34	38	39
100°		62	75	84	86

Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°		48	50	53	54
50°		106	110	117	119
21°		44	47	49	51
70°		97	104	108	112
32°		42	45	47	49
90°		93	99	104	108
38°		40	43	45	47
100°		88	95	99	104

CUBE TYPE




20g weight BRIGHT CUBE

32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL




Start-standby Switch
Status Led


BIN CAPACITY

22 Kg - 48.5 lbs | 1100 pcs

DIMENSIONS

W x D x H (mm)

 500 x 580 x 800/835

 560 x 640 x 960

OPERATING REQUIREMENTS

Rejected Heat 1707 W





Air Volume 310 m³/h
















220-240/50/1




R290 GWP = 3

MIN		MAX	
10°C (50°F)		40°C (104°F)	
5°C (41°F)		35°C (95°F)	
- 10 %		+ 10 %	
1 Bar (14 psi)		5 Bar (70 psi)	


SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
CS54 ZP A		1167	520	10	23.3	4.5	42	93	50	110	0
CS54 ZP W		1167	440	10	20.6	43.4	42	93	50	110	0




Vista frontale
Front view

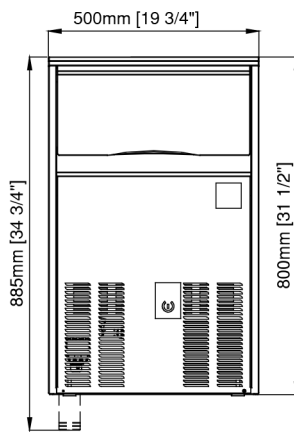

Vista laterale
Lateral view

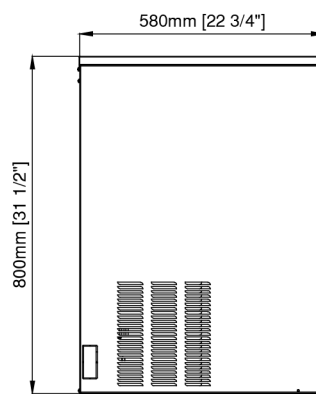

Vista superiore
Top view



Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

- (B)** Electrical cable supply / Ingresso alimentazione elettrica
- (C)** Water outlet connection / Attacco scarico acqua diam. 20 mm

- (D)** Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm
- (E)** Water inlet connection / Attacco entrata acqua - 3/4"gas

R290