



Flake ice is generated through a vertical cylinder, with an internal auger which scrapes the ice from the internal surface of the evaporator. This produces uniform flake ice with a residual water content

- Self contained flaker on legs.
- Up to 200kg production per 24/hr of flake ice.
- 50kg storage bin.
- Stainless steel cabinet.
- Complete with water & drain hoses + 1 ice scoop.
- 10 AMP power supply.



ICE PRODUCTION


Air Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	172	186	193	200
50°	379	410	425	441
21°	152	166	173	180
70°	335	366	381	397
32°	136	151	158	165
90°	300	333	348	364
38°	125	139	146	153
100°	276	306	322	337

Water Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	170	184	191	200
50°	375	406	421	441
21°	162	176	183	190
70°	357	388	403	419
32°	152	166	173	180
90°	335	366	481	397
38°	130	144	151	158
100°	287	317	333	348


ICE TYPE



25%
FLAKE ICE
residual water content

Flake ice has a lot of uses, from the conservation and display of fresh fish to cocktail creation and juice bars. Flake ice is also used in hospitals and during the production of sausages and bread, to chill the mix. Flake ice is extremely versatile.

CONTROL PANEL

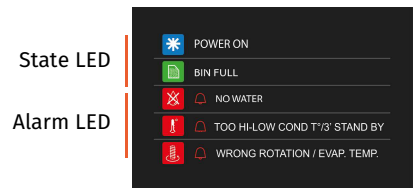



BIN CAPACITY

50 kg - 110 lbs

DIMENSIONS

W x D x H (mm)

 700 x 616 x 995

 760 x 680 x 1070

OPERATING REQUIREMENTS

Rejected Heat 2865 W





Air Volume 450 m³/h
















220-240/50/1



R134a GWP = 1430

MIN		MAX	
10°C (50°F)		40°C (104°F)	
10°C (50°F)		35°C (95°F)	
- 10 %		+ 10 %	
1 Bar (14 psi)		5 Bar (70 psi)	

SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
F200C A		2108	770	10	11.1	6.4	75	165	85	187	0.5
F200C W		2108	650	10	9.0	66.2	75	165	85	187	0.36

