




Nugget ice is generated through a vertical cylinder, with an internal turning auger which scrapes the ice from the internal surface of the evaporator, lifting it up an ice extruder which compresses the ice shavings into a cylinder.

High production modular nugget ice maker.
Up to 425kg production per 24/hr of nugget ice.
Head only.
Stainless steel cabinet.
Complete with water & drain hoses.
15 AMPS, 2kw power supply.




ICE PRODUCTION

Air Cooled Unit

Air Temp.	Water Temperature			
				
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	410	440	455	470
50°	904	970	1003	1036
21°	380	410	425	440
70°	838	904	937	970
32°	330	360	375	390
90°	728	794	827	860
38°	300	330	345	360
100°	661	728	760	794

CUBE TYPE



1g
NUGGET ICE
11 mm Ø x 13 mm H
8% residual water content

Nugget ice is both compact and chewable. It's the ideal ice for cocktails like caipirinha, mojito and caipiroska. It's easy to measure like flake ice but it's much less wet

SUGGESTED STORAGE BIN



BH122+KBT25
Stainless steel storage bin.
406kg capacity.

DIMENSIONS

W x D x H (mm)
538 x 663 x 790





OPERATING REQUIREMENTS














220-240/50/1




R404a GWP=3922

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)

SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs
G470 A		5030	2000	16	12	15	94	207	103	227

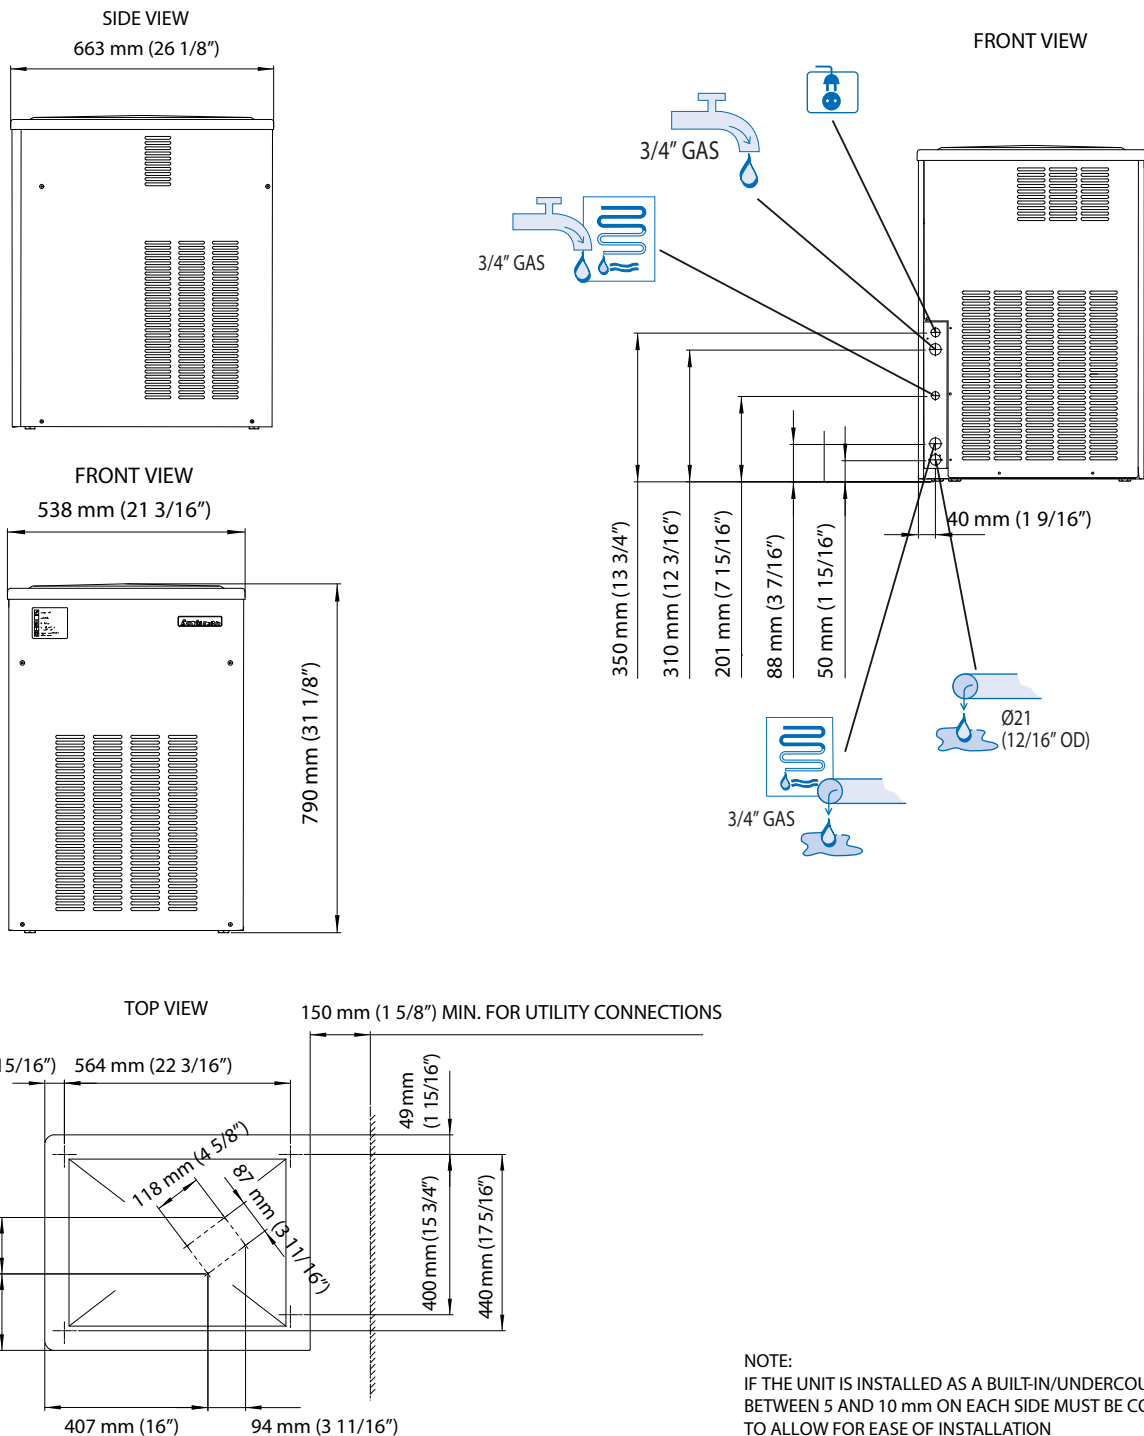

NOTE:
IF THE UNIT IS INSTALLED AS A BUILT-IN/UNDERCOUNTER, BETWEEN 5 AND 10 mm ON EACH SIDE MUST BE CONSIDERED TO ALLOW FOR EASE OF INSTALLATION