

## GC202 1P PLUS

20 x 2/1GN roll in blast chiller/freezer

### functions

Blast chilling cycles +3°C HARD/SOFT

Blast freezing cycles -18°C HARD/SOFT

Thawing

Retarder proofer

Low temperature cooking

Max. chilling capacity (+3°C) / kg **300**

Max. freezing capacity (-18°C) / kg **200**

Climatic class **4**

### technical data

Width (mm) **1700**

Depth (mm) **1530**

Height (mm) **2300**

Weight (kg) **650**

N° trays 2/1GN (535x650) or 600x800 **20**

N° trays trolleys 2/1GN **1**

Electric connection (V/~ /Hz) **420/3/50  
+ N**

Electric power (W) **7575**

Max. absorbed current (A) **12.43**

Compressor (HP) **15**

Refrigerant type (gas) **R452A**

Internal width (mm) **900**

Internal depth (mm) **1080**

Internal height (mm) **2020**


Gross weight (kg) **780**





### main features

- Full Touch 7-inch Display
- Finely “Scotch Brite” brushed exterior
- 80 mm insulation thickness in CFC and HCFC-free PU, density 42 kg/m<sup>3</sup>
- 2mm stainless steel floor
- Large storage capacity cell featuring rounded corners for easy cleaning
- Ergonomic handles
- Front electric panel that can be fully inspected
- Drain
- Air distribution with new evaporator deflector
- OPTIONAL electronic expansion valve
- PLUS versions ventilation regulation by inverter
- Connectivity 4.0
- Load capacity pursuant to EN17032
- OPTIONAL weather sealed and soundproofed condensing units


**202 (C40) "H"**

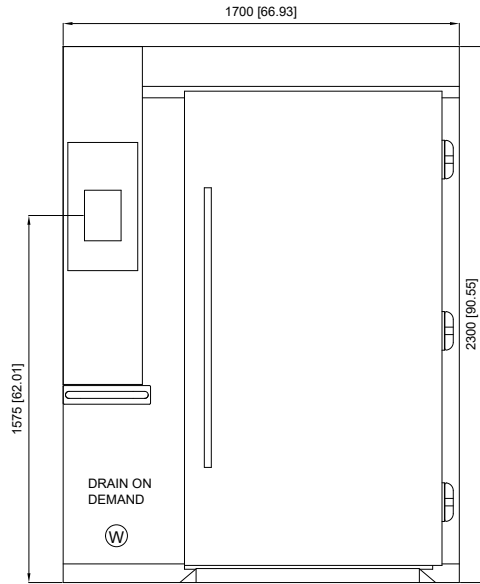

FRONT VIEW

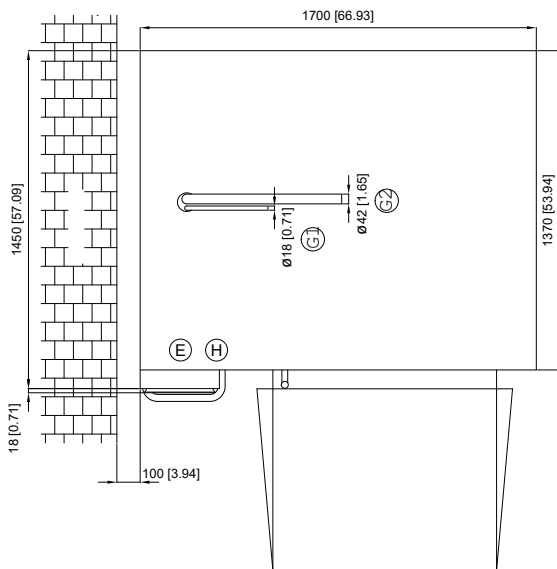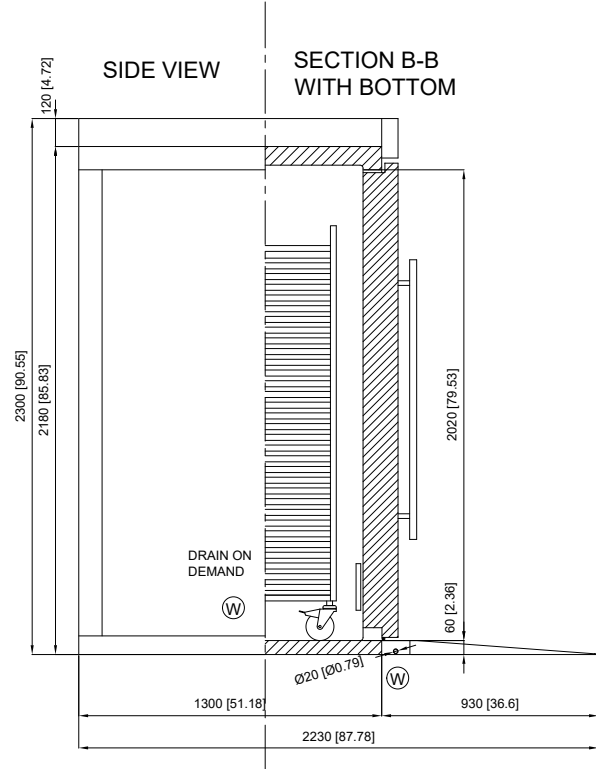

TOP VIEW

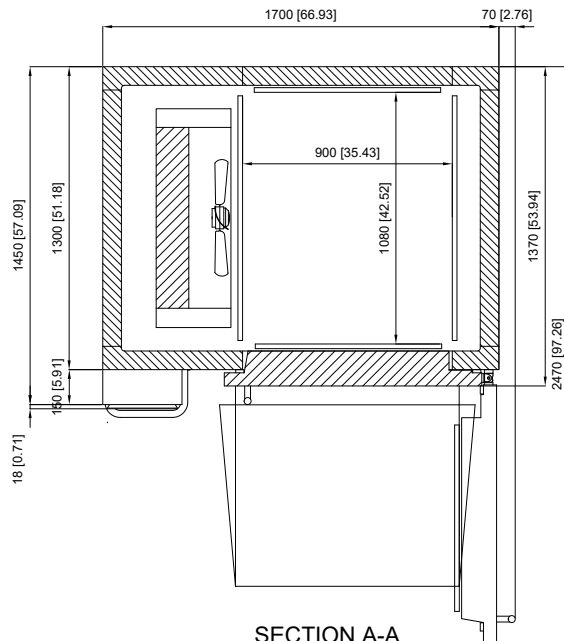

SECTION A-A

- Ⓜ1 INGRESSO REFRIGERANTE  
REFRIGERANT INLET
- Ⓜ2 USCITA REFRIGERANTE  
FERIGERANT OUTLET
- Ⓜ CONNESSIONE ELETTRICA  
ELECTRICAL CONNECTION
- Ⓜ CONNESSIONE SCARICO  
DRAIN CONNECTION
- Ⓜ CONNESSIONE H2O  
WATER CONNECTION

DIMENSIONI mm  
DIMENSIONS [in]