



GLO-RAY®

HEATED DISPLAY WARMERS

BOOST IMPULSE SALES BY SHOWCASING YOUR HOT FOODS IN THE HATCO GLO-RAY MERCHANDISING WARMERS.

Designed specifically for displaying wrapped or boxed product, these warmers hold hot food safely at proper serving temperatures and are seen in many of the best known venues around the world.

Hardcoated shelves, adjustable dividers, shatter-resistant incandescent display lights, and 1829mm cord with plug are all standard.

These warmers offer the convenience of selfserve and the efficiency of kitchen-to-server holding.

UNIQUE BENEFITS INCLUDE:

- ▶ Prefocused infrared top heat directs heat to the outer edges where heat loss is greatest.
- ▶ Convenient for self-serve or quick-serve areas.
- ▶ Available in two-tier models with horizontal or slanted shelves.
- ▶ Adjustable product divider rods sort food displays for convenience and product appeal.
- ▶ Thermostatically controlled hard-coated heated base extends holding times.
- ▶ Food grade Teflon coated incandescent lights illuminate the holding areas and product for maximum visibility.

CODE	DESCRIPTION	KW
GRSDS-24D	Dual Shelf - 610 mmW	1.34kw
GRSDS-30D	Dual Shelf - 760 mmW	1.53kw
GRSDS-36D	Dual Shelf - 910 mmW	1.81kw
GRSDS-41D	Dual Shelf - 1040 mmW	2.12kw
GRSDS-52D	Dual Shelf- 1320 mmW	2.73kw
GRSDS-60D	Dual Shelf - 1520 mmW	3.34kw



GRSDS Slant Model all 610 mm deep

FSM (FOOD SERVICE MACHINERY PTY. LTD.)
HEAD OFFICE: UNIT E6, 63-85 TURNER STREET,
 PORT MELBOURNE, VIC. 3207 AUSTRALIA
 T: +61 3 8645 2555 F: +61 3 8645 2565
 E: sales@fsm-pl.com.au W: www.fsm-pl.com.au


SYDNEY OFFICE:
 UNIT 15, 7-9 PROGRESS CIRCUIT,
 PRESTONS, NSW 2170 AUSTRALIA
 T: +61 2 9608 8620 F: +61 2 9607 9370
 E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

QUEENSLAND:
 T: 0400 099 992
 E: sales@fsm-pl.com.au
 W: www.fsm-pl.com.au



GLO-RAY[®] MERCHANDISING DISPLAY WARMERS

Models GRSDH-24, -30, -36, -41, -52, -60 GRSDH-24D, -30D, -36D, -41D, -52D, -60D GRSDS-24, -30, -36, -41, -52, -60
GRSDS-24D, -30D, -36D, -41D, -52D, -60D, -24T, -36T GRSDS/H-30D, -36D, -41D, -30DHW, -36DHW, -41DHW

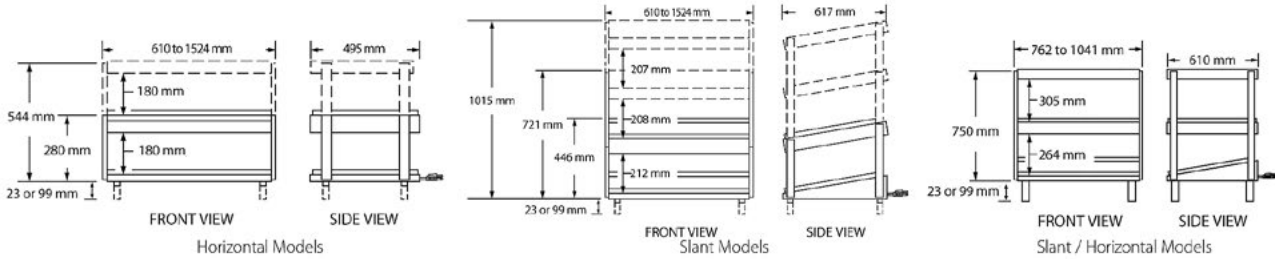

SPECIFICATIONS

Horizontal Models – Single Shelf

Model	Width	Watts	Shipping Weight
GRSDH-24	610 mm	830	51 lbs. (23 kg)
GRSDH-30	762 mm	970	58 lbs. (26 kg)
GRSDH-36	914 mm	1170	66 lbs. (30 kg)
GRSDH-41 [▲]	1041 mm	1340	74 lbs. (34 kg)
GRSDH-52 [▲]	1321 mm	1760	86 lbs. (39 kg)
GRSDH-60 [▲]	1524 mm	2100	198 lbs. (90 kg) [†]

Horizontal Models – Dual Shelf

Model	Width	Watts	Shipping Weight
GRSDH-24D [▲]	610 mm	1660	90 lbs. (41 kg)
GRSDH-30D [▲]	762 mm	1920	100 lbs. (45 kg)
GRSDH-36D [▲]	914 mm	2340	112 lbs. (51 kg)
GRSDH-41D [▲]	1041 mm	2680	126 lbs. (57 kg)
GRSDH-52D [▲]	1321 mm	3520	150 lbs. (68 kg)
GRSDH-60D [▲]	1524 mm	4200	268 lbs. (122 kg) [†]

Slant Models – Single Shelf

Model	Width	Watts	Shipping Weight
GRSDS-24	610 mm	695	72 lbs. (33 kg)
GRSDS-30	762 mm	790	80 lbs. (36 kg)
GRSDS-36 [▲]	914 mm	935	92 lbs. (42 kg)
GRSDS-41 [▲]	1041 mm	1090	96 lbs. (44 kg)
GRSDS-52 [▲]	1321 mm	1400	102 lbs. (46 kg)
GRSDS-60 [▲]	1524 mm	1715	108 lbs. (49 kg)

Slant Models – Dual Shelf

Model	Width	Watts	Shipping Weight
GRSDS-24D [▲]	610 mm	1355	128 lbs. (58 kg)
GRSDS-30D [▲]	762 mm	1530	140 lbs. (64 kg)
GRSDS-36D [▲]	914 mm	1810	158 lbs. (72 kg)
GRSDS-41D [▲]	1041 mm	2120	178 lbs. (81 kg)
GRSDS-52D [▲]	1321 mm	2725	205 lbs. (93 kg)
GRSDS-60D [▲]	1524 mm	3340	238 lbs. (108 kg)

Slant Models – Triple Shelf

Model	Width	Watts	Shipping Weight
GRSDS-24T [▲] §	606 mm	2015	183 lbs. (83 kg)
GRSDS-36T [▲]	911 mm	2685	225 lbs. (102 kg)

Slant / Horizontal Models – Dual Shelf

Model	Width	Watts	Shipping Weight
GRSDS/H-30D [▲]	762 mm	1530	140 lbs. (64 kg)
GRSDS/H-36D [▲]	914 mm	1810	158 lbs. (72 kg)
GRSDS/H-41D [▲]	1041 mm	2120	178 lbs. (81 kg)
GRSDS/H-30DHW [▲] Ⓞ	762 mm	2450	140 lbs. (64 kg)
GRSDS/H-36DHW [▲] Ⓞ	914 mm	2910	158 lbs. (72 kg)
GRSDS/H-41DHW [▲] Ⓞ	1041 mm	3460	178 lbs. (81 kg)

OPTIONS (NOT FOR RETROFIT)

- Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, (Glossy Gray is standard on Slant Models), non-standard colors are non-returnable
- Indicating Temperature Control (ITC)
- Stainless Steel End Panels (In lieu of Glass End Panels)
- Sneeze Guard (GRSDS models, one side) (GRSDH models, two sides)
- 15" (381 mm) Clearance Top Shelf (GRSDS/H models)
- Halogen Bulbs in lieu of Standard Display Lights

- Locking plates for flip-up doors
- Display Sign Holder (Signs not included) – Top or Intermediate Shelf

ACCESSORIES

- Flip-up Doors on One Side (24" thru 41"W (610-1041 mm) models) (not available with sneeze guard option or display sign holder accessory on same opening)
- Split Flip-up Doors on One Side (52" and 60"W (1321-1524 mm) models)
- 4" (102 mm) Adjustable Legs (Standard on units over 36" (914 mm) in length or weighing more than 80 lbs. (36 kg))
- Additional Stainless Steel Divider Rods

DIMENSIONS

Horizontal Models –

Single: 610-914 x 495 x 303 mm [Ⓞ]
1041-1524 x 495 x 379 mm ^{*}

Dual: 610-1524 x 495 x 643 mm ^{*}

Slant Models –

Single: 610-762 x 617 x 469 mm [Ⓞ]
914-1524 x 617 x 545 mm ^{*}

Dual: 610-1524 x 617 x 820 mm ^{*}

Triple: 606-911 x 617 x 1114 mm ^{*}

Slant/Horizontal Models –

Dual: 762-1041 x 610 x 849 mm ^{*}

[Ⓞ] Includes 25 mm legs which add 23 mm to height of unit.
^{*} Includes 102 mm legs which add 99 mm to height of unit.

VOLTAGE

GRSDH-24 to -52, GRSDS-24 to -60, GRSDH-24D, GRSDS-24D, GRSDS-30D, and GRSDS/H-30D: 120 volts, single phase (use NEMA 5-15P; GRSDH-52, GRSDH-24D, GRSDS-60, GRSDS-30D, and GRSDS/H-30D use NEMA 5-20P for Canada).

GRSDH-30D, GRSDS-36D, GRSDS-24T, and GRSDS/H-36D: 120 volts, single phase (use NEMA 5-20P).

GRSDH-60, GRSDH-36D to -60D, GRSDS-41D to -60D, GRSDS-36T, and GRSDS/H-41D, -30DHW, -36DHW, -41DHW: 120/208 or 120/240 volts, single phase, 4-wire (use NEMA L14-20P).

Export voltages available.

CORD LOCATION

GRSDH: Left rear corner toward server side.

GRSDS: Control side at right base corner.

GRSDS/H: Control side at right base corner.

[▲] NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included. [†] Based on 120/208 volts, 120/240 volts.

[†] Shipping weight includes crating. [§] Not available for Canada.

[Ⓞ] High wattage on top shelf only.

Due to our policy of continuous product improvement, specifications are subject to change without notice.

All models sold in Australia/New Zealand are 240Volt single phase, models above 3600W are supplied unplugged.

FSM (FOOD SERVICE MACHINERY PTY. LTD.)

HEAD OFFICE: UNIT E6, 63-85 TURNER STREET,

PORT MELBOURNE, VIC. 3207 AUSTRALIA

T: +61 3 8645 2555 F: +61 3 8645 2565

E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

SYDNEY OFFICE:

UNIT 15, 7-9 PROGRESS CIRCUIT,

PRESTONS, NSW 2170 AUSTRALIA

T: +61 2 9608 8620 F: +61 2 9607 9370

E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

QUEENSLAND:

T: 0400 099 992

E: sales@fsm-pl.com.au

W: www.fsm-pl.com.au