

People who serve, products that solve.™

HEATED BUILT-IN WELLS HWB-FULD rectangular & HWB-QTD round models

Hatco Built-In Heated Wells hold heated foods at safe serving temperatures.

Compared to other models, these Hatco units offer insulated wells for better heat retention, larger drains with flat well screens, more consistent holding temperatures through superior element design, heavier stainless steel construction, easier-to-service design for quick-change of components, and a remote thermostat with separate power switch. Available in wet or dry operation.

Available in rectangular and round models, all units are supplied with a control panel and connected with a 918mm flexible conduit for remote mounting and come with 3/4" NPTdrain hole.







Convenient separate On-Off control and thermostat



Round Built-in wells 4QT, 7QT and 11QT models.



Optional pan inserts and lids.




SPECIFICATIONS

HWB-FULD rectangular & HWB-QTD round models


CODE	DESCRIPTION	KW	AMP
HWB-4QTD	4 Quart (3.8Litre) Heated Well with 3/4" NPT drain hole.	0.6kw	10 amp plug
HWB-7QTD	7 Quart (6.65L) Heated Well with 3/4" NPT drain hole.	0.6kw	10 amp plug
HWB-11QTD	11 Quart (10.41L) Heated Well inc. 3/4" NPT drain hole.	0.6kw	10 amp plug

CODE	DESCRIPTION
4QT-PAN&LID	4 Quart (3.8L) Round Well and Notched Lid.
7QT-PAN&LID	7 Quart (6.65L) Round Well and Notched Lid.
11QT-PAN&LID	11 Quart (10.41L) Round Well and Notched Lid.

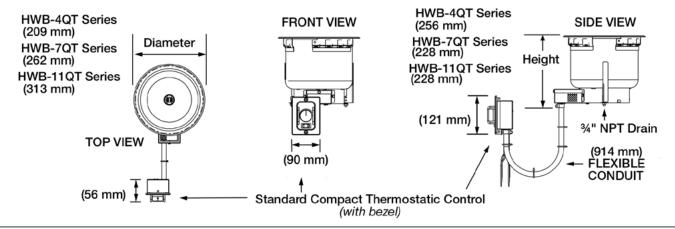

Non-Combustible Countertop Opening

("Circular" cut-out)



Cutout Dimensions for Non-Combustible Countertop

Model	Minimum Diameter (A)	Maximum Diameter (A)	
HWB-4QT	(181 mm)	(192 mm)	
HWB-7QT	(232 mm)	(243 mm)	
HWB-11QT	(282 mm)	(294 mm)	

Combustible Countertop Opening

("Square" cut-out)



Cutout Dimensions for Combustible Countertops ▲ · Accessory Mounting Kit required

Model	Minimum Width (A)	Maximum Width (A)	Minimum Width (B)	Maximum Width (B)	
HWB-4QT	(229 mm)	(235 mm)	(229 mm)	(235 mm)	
HWB-7QT	(279 mm)	(286 mm)	(279 mm)	(286 mm)	
HWB-11QT	(330 mm)	(337 mm)	(330 mm)	(337 mm)	

NOTE: all units supplied with 3/4" NPT thread drain hole. Drain not supplied.

▲ Accessory Mounting Kit required

CODE	DESCRIPTION	KW	AMP
HWB-FULD	Heated Well with 3/4" NPT drain hole Suits 1/1 GN Pan.	1.2kw	10 amp plug

DIMENSIONS (W x D x H)

HWB-FULD Series: 348 W x 553 D x 218 Hmm HWB-4QT Series: 209 Diameter x 241 Hmm. HWB-7QT Series: 262 Diameter x 221 Hmm. HWB-11QT Series: 311 Diameter x 213 Hmm.

CONTROL PANEL DIMENSIONS

Recessed: 161 W x 92 D x 196 Hmm. Control Panel Cut-Out: 149 W x 162 Hmm.

Built-in and Drop-in Heated Wells Countertop Cutout Dimensions

Model Series	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth	Below Counter
HWB-FUL	(321 mm)	(328 mm)	(524 mm)	(532 mm)	(218 mm)
HWB-FUL*	(356 mm)	(362 mm)	(559 mm)	(565 mm)	(218 mm)

Indicates dimensions for combustible surface

NOTE: all units supplied with 3/4" NPT thread drain hole. Drain not supplied.

Due to our policy of continuous product development, all specifications are subject to change without notice.

T: 0400 099 992

E: sales @fsm-pl.com.au W: www.fsm-pl.com.au