



MODULINE

foodfinish & foodserve technologies

HDCF03E - HDCF13E

Refrigerated drawers

HOLDING SYSTEMS



CONSTRUCTION FEATURES

- Stainless steel AISI 304 construction
- Highly efficient and thick insulation, casing injected with CFC-free polyurethane foam
- Magnetic drawers seal
- Drawers with tray frame
- Static cooling through copper coils embedded in polyurethane foams
- Ecological type compressor unit (R404A)
- Easy access to facilitate maintenance and repair

STANDARD SUPPLY

- Polycarbonate gastronorm containers for each drawer


FUNCTIONAL FEATURES

- Electronic temperature control with defrosting programme
- Simplified, user-friendly controls
- Operating temperature +0°C/+5°C and -18°C/+5°C
- Condensate evaporation tray
- Adjustable feet
- Solid top for equipments support

OPTIONS & ACCESSORIES



- 4 castors, 2 of which with brake

Model	Overall dimensions (W x D x H) - mm	Drawers capacity +3°C (h=150)	Drawers capacity -18°C (h=150)	Power - kw	Power supply
HDCF03E	680x650x1040 h	2 x GN 1/1 + 4 x GN 1/4	1 x GN 1/1	0,42	AC 230V 50HZ
HDCF13E	790x700x1040 h	2 x GN 2/1	1 x 600 x 400	0,42	AC 230V 50HZ



TECHNICAL INSTALLATION DIAGRAM

HDCF03E

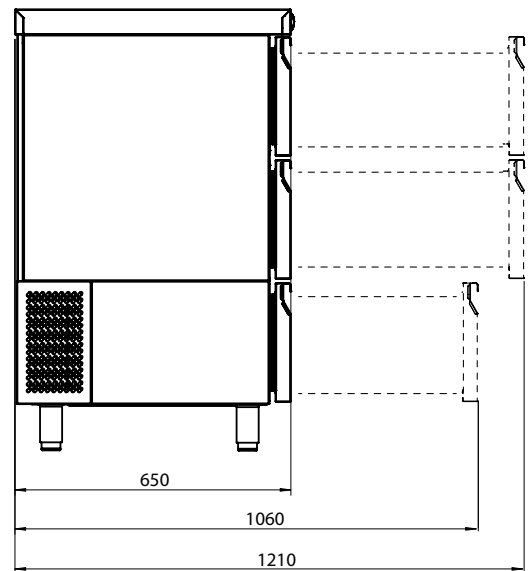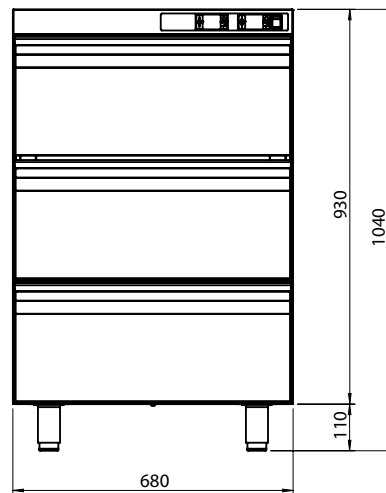

HDCF13E

