


EXIT AIR TEMPERATURE : 27°C

HUMIDITY: 90%

AIR FLOW RATE: 200 m³/h

RECOVERY PER HOUR: 3.5 kWh
(VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

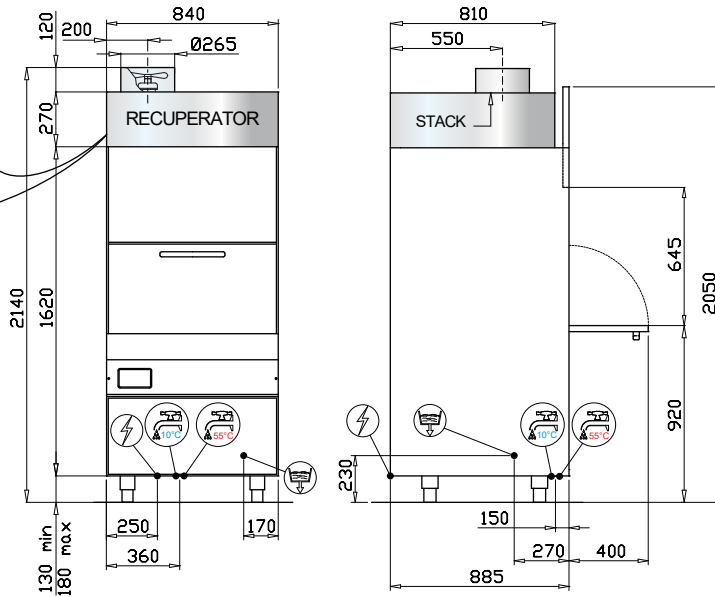

	HOT WATER CONNECTION 3/4" GAS MAX 55°C
	COLD WATER CONNECTION 3/4" GAS 10°C
	DRAIN PIPE Ø 32mm
	ELECTRICAL SUPPLY

TECHNICAL DATA		STANDARD			
EXTERNAL DIMENSIONS					
width	840 mm				
depth	885 mm				
height	2140 mm				
WEIGHT	215 kg				
VOLTAGE	400V 3N 50Hz				
POWER EQUIRED	12500 W				
WATER HARDNESS	< 8 °F				
INLET WATER PRESSURE	200 - 400 kPa				
CROCKERY DIMENSIONS					
max. tray height	645 mm				
RACK DIMENSIONS	700 x 700 mm				
RACK EQUIPMENT	1 x spatula basket - 1 x tray support - 1 x s/steel basket				
WASHING CYCLES (min)	1(4)	2(7)	3(10)	4(13)	
WATER SUPPLY 55°C					
rack/h(*) ⁽¹⁾	--	--	--	--	
WATER SUPPLY 10°C					
rack/h(*) ⁽¹⁾	15	8	6	4	
WATER CONSUMPTION / CYCLE	4.3 L				
BOILER CAPACITY	20 L				
BOILER HEATING ELEMENT	9000 W				
RINSING TEMPERATURE (SET)	85 °C				
TANK CAPACITY	78 L				
TANK HEATING ELEMENT	6000 W				
TANK TEMPERATURE (SET)	55 °C				
WASHING PUMP POWER	1750 W (810 L/min ^{***}) x 2				
RINSING PUMP POWER	250 W (150 L/min ^{***})				
DRAIN PUMP (optional)	190 W (120 L/min ^{***})				
NOISE	69.9 dB(A)				

(*) STANDARD THERMOSTOP

(***) MAXIMUM FLOW RATE

¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash -cycle total timing might result longer than set.