


EXIT AIR TEMPERATURE : 27°C

HUMIDITY: 90%

AIR FLOW RATE: 200 m³/h

RECOVERY PER HOUR: 3,5 kWh
(VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

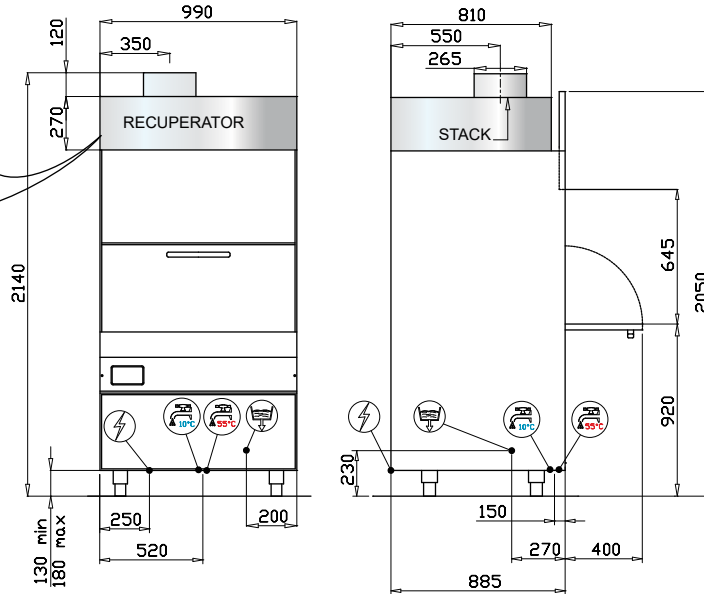

	HOT WATER CONNECTION 3/4" GAS MAX 55°C
	COLD WATER CONNECTION 3/4" GAS 10°C
	DRAIN PIPE Ø 32mm
	ELECTRICAL SUPPLY

TECHNICAL DATA	STANDARD			
EXTERNAL DIMENSIONS				
width	990 mm			
depth	885 mm			
height	2140 mm			
WEIGHT	237 kg			
VOLTAGE	400V 3N 50Hz			
POWER EQUIRED	13360 W			
WATER HARDNESS	< 8 °F			
INLET WATER PRESSURE	200 - 400 kPa			
CROCKERY DIMENSIONS				
max. tray height	645 mm			
RACK DIMENSIONS	850 x 725 mm			
RACK EQUIPMENT	1 x spatula basket - 1 x tray support - 1 x s/steel basket			
WASHING CYCLES (min)	1(4)	2(7)	3(10)	4(13)
WATER SUPPLY 55°C				
rack/h(*) ⁽¹⁾	--	--	--	--
WATER SUPPLY 10°C				
rack/h(*) ⁽¹⁾	15	8	6	4
WATER CONSUMPTION / CYCLE	4.3 L			
BOILER CAPACITY	20 L			
BOILER HEATING ELEMENT	9000 W			
RINSING TEMPERATURE (SET)	85 °C			
TANK CAPACITY	78 L			
TANK HEATING ELEMENT	6000 W			
TANK TEMPERATURE (SET)	55 °C			
WASHING PUMP POWER	2180 W (810 L/min ^{***}) x 2			
RINSING PUMP POWER	250 W (150 L/min ^{***})			
DRAIN PUMP (optional)	190 W (120 L/min ^{***})			
NOISE	71.1 dB(A)			

(*) STANDARD THERMOSTOP

(***) MAXIMUM FLOW RATE

¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash -cycle total timing might result longer than set.