


Modular Flake-Ice Machine up to 120 Kg



ABS plastic
top cover



Electronic Controls



Stainless Steel



MF 36+SB193
(sold separately)



MF 36+SB322
(sold separately)



MF 36+SB393+Top
(sold separately)



MF 36+SB530+Top
(sold separately)



MF 36+SB550+Top
(sold separately)



MF 36+RBC Stand
(sold separately)



MF 36+SIS300
(sold separately)



MF 36+SIS700
(sold separately)

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions



Features

- Modular Flake-ice machine, production up to 120 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in ABS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, contains 25% residual water content, hence very rich in moisture.
- CFC-free R 134a Refrigerant

MF 26 Technologies



		10°: 10°C		21°: 15°C		 [WxDxH mm] 564x536x531
		[kg]	[lbs]	[kg]	[lbs]	
MF 26 AS		120	264	110	242	[WxDxH inches] 223/16" x 211/8" x 207/8"
MF 26 WS		120	264	106	234	
						 [v/Hz/ph] 230/50/1
						 R 134 a




Residual water content 25%

Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com
 Models and specifications are subject to change without notice.

Modular Flake-Ice Machine up to 120 Kg

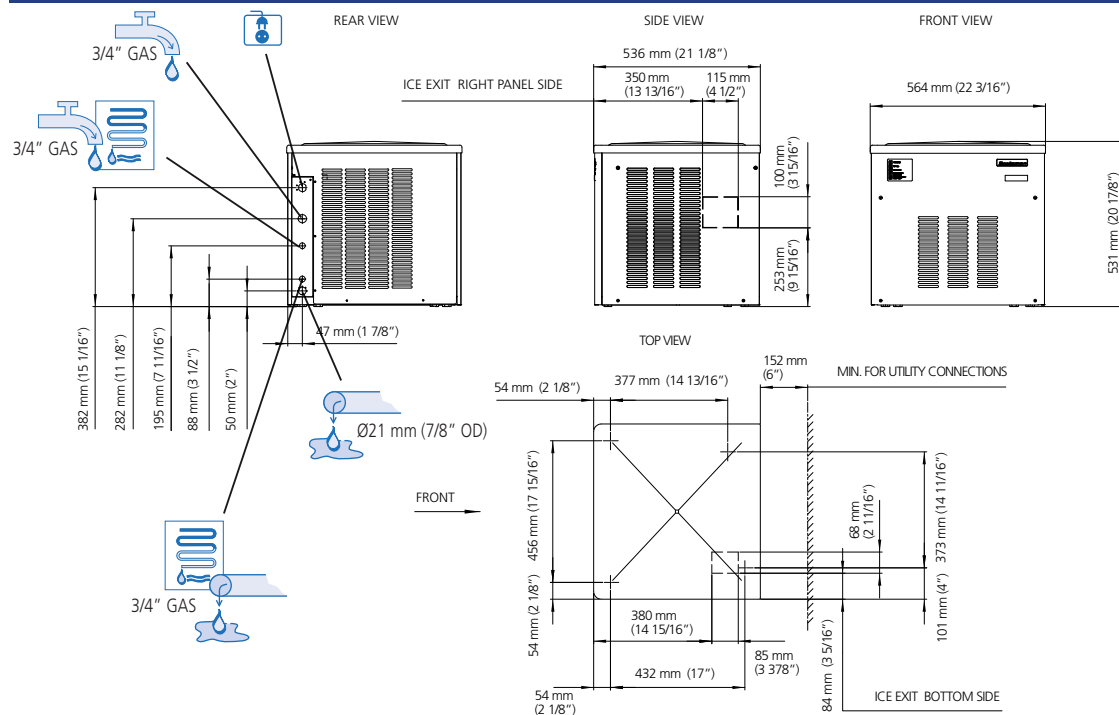

MF 26 AIR COOLED

°C \ °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	120	116	112	104	kg
50°	264	256	247	229	lbs
21°	114	110	106	98	kg
70°	251	242	234	216	lbs
32°	103	99	95	87	kg
90°	227	218	209	192	lbs
38°	96	92	88	80	kg
100	212	203	194	176	lbs



MF 26 WATER COOLED

°C \ °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	120	116	112	104	kg
50°	264	256	247	229	lbs
21°	110	106	102	94	kg
70°	242	234	225	207	lbs
32°	105	101	97	89	kg
90°	231	223	214	196	lbs
38°	103	99	95	87	kg
100	227	218	209	192	lbs



Minimum

10°C (50°F)



Maximum

40°C (104°F)

5°C (41°F)

35°C (95°F)

-10%

+10%

1 BAR
14 psi

5 BAR
70 psi

		[Btu/h] [W]	[Ømm²]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg] [lbs]	[kg] [lbs]	[kg] [lbs]
MF 26 AS		4090 1200	3 x 1,5	500	10 A	11.6	4	1	45 99	52 115	
MF 26 WS		4090 1200	3 x 1,5	500	10 A	11.3	29	7,6	45 99	52 115	

CONTACT POINTS:

Europe

Scotsman Europe-Frimont S.p.A.
Ph/Fax +39-0293960208 / 0293960201
scotsman.europe@frimont.it
Paolo Moro

Middle East & N. Africa

Scotsman-Frimont Regional Office (MENA)
Ph/Fax +97-16 5262944 / 165262946
m.dawood@frimont.ae
fernando.m@frimont.ae

Asia and Pacific

Scotsman Industries (S) PTE. L.T.D.
Ph/Fax +65-67385393 / 67381959
scotsman@scotsman.com.sg
Andrea Tronci

South Africa

Scotsman SA (Pty) Ltd - Ice Systems (Pty) Ltd
Ph/Fax +27-0105900609 / 0877200245/6/7/8
Fax: +27-118264123 / 0866340803
stuart@scotsmansa.co.za - jennifer@scotsman.co.za

India

Scotsman Group India
Ph/Fax : +91-1244002459 / direct 9560072459
david.owen@scotsman.com.sg

Spain

Scotsman España, S.L.U. c/ Galapagar, 12
Ph/Fax +34-911109796 / 916337423
scotsman@scotsman-espana.es
Daniel Doblado

China

Scotsman Ice Systems (Shanghai)
Ph/Fax : +86-2161313200 / 2161313330
scotsman.shanghai@scotsman-china.com
Andrew Clayton