



QUALITY ABOVE ALL  
COMMERCIAL REFRIGERATION - NEO GENERATION





## INDEX

QUALITY  
ABOVE ALL  
04

ROBUST CONSTRUCTION  
AND RELIABLE REFRIGETATION SYSTEM  
06

HYGIENE AND SAFETY.  
ADVANCED DIGITAL CONTROL  
12

CABINETS  
16

COUNTERS  
17

MISCELLANEOUS  
PRODUCTS  
32



QUALITY  
ABOVE ALL.

At Fagor we have always believed that quality and reliability are the keys to success. This policy applies to all our product ranges and also with our classic Commercial Cold Storage range, improving the design and technologies. **Our Concept range uses elements from our top ranges in order to present a more coherent and improved offer across all our product lines.** The conclusion is clear: design and reliability improvements for our widest and best priced range for the sole purpose of satisfying all of our customers.



ROBUST  
CONSTRUCTION  
AND RELIABLE  
REFRIGERATION  
SYSTEM

---

01.

**REINFORCED STRUCTURE**

Specially manufactured for intensive professional applications, featuring a very robust design with high-quality materials and perfect finishing.

02.

**HEIGHT-ADJUSTABLE STAINLESS STEEL LEGS**

Assembled stainless steel legs supplied as standard option. The height of the legs can be adjusted individually (125 mm - 200 mm) to enable convenient cleaning underneath the appliance. Castors are available as an option.

03.

**INTEGRATED STAINLESS STEEL HANDLE**

Ergonomic, full-length, robust, perfectly integrated handle ensures practical opening of the door that avoids dust and dirt collection, being extremely easy to clean.

04.

**STURDY WIRE GRIDS**

Placing and adjusting the wire grids at the desired height is possible without using extra rails. The plasticcoated wire grids allow storage of different packaging types and have a maximum loading capacity of up to 40 kg.

05.

**SELF CLOSING HINGED DOORS**

Hinged doors with automatic return for a perfect closing that minimize temperature gain and reduces energy consumption.

**Self-closing: when the door is opened less than 90 °.**  
**Stay open feature: when opened more than 110 °.**

06.



**WORKING TOPS**


Heavy-duty stainless steel 50 mm working tops with 100 mm high splash-back as standard option, preventing spillage behind the counter. Customization is available in different configurations (without splash-back, without top, with sink) and materials (stainless steel, granite) to adapt to any professional kitchen needs.

07.

**STAINLESS STEEL TELESCOPIC SLIDING DRAWERS**

Stainless steel drawers with perforated bottom plates and telescopic sliding guides, capable of complete retraction, to economize working surface.

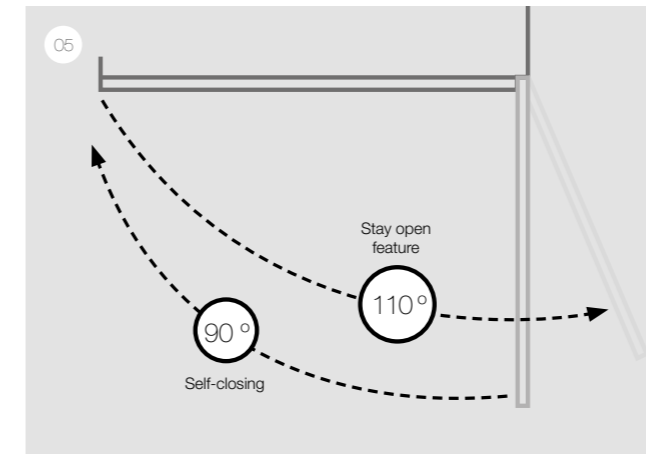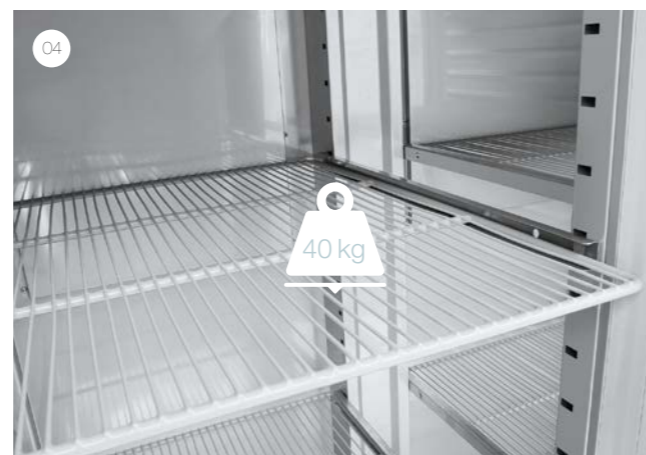

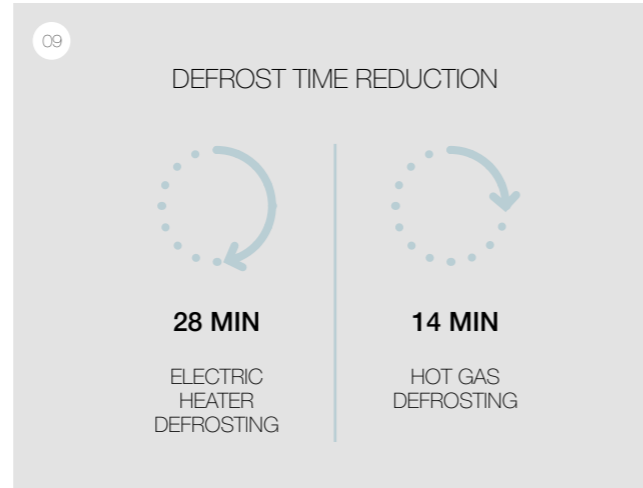

08.

**R134 AND R404a GASES**

CFC-free ecological refrigerant gases with high specific capacity. Operating temperature: -2 °C /+10 °C for refrigerators and -22 °C / -18 °C for freezers at room temperature of 38 °C. This range of temperature in refrigerators gives the flexibility to set temperature inside the cabinet according to different food types.

09.

**AUTOMATIC EVAPORATION OF DEFROST WATER**

Hot gas coming from the compressor is used to automatically evaporate defrost water, instead of by means of heating elements, achieving even less energy consumption and reducing in half defrost time. As a result, food is not subject to harmful temperature fluctuations.

10.

**INTELLIGENT AIR CIRCULATION SYSTEM**

Perfect temperature consistency with its innovative air flow design that encircles the food and ensures its proper conservation.





HYGIENE AND SAFETY,  
ADVANCED DIGITAL  
CONTROL.

---

01.

**ROUNDED EDGE INTERIORS**

Pressed bottom with rounded edges, easy to clean and designed to catch any fluid and make sure there is no spillage to the floor.

02.

**REMOVABLE GUIDING RAILS**

Completely removable tray slides, racks and drawers makes it easy to clean the interior.

03.

**INTUITIVE DIGITAL CONTROL**


Temperature parameters adjusted easily and quickly, enabling the highest quality and the best food preservation.

**Alarm:** Gives a warning to the user that the cabinet temperature is running out of pre-set operating conditions.

04.

**ECO FUNCTION**

This running mode optimises our equipments' performance. When the door remains closed for a certain period of time, temperature and time are automatically selected so that the cooling unit only works when required.

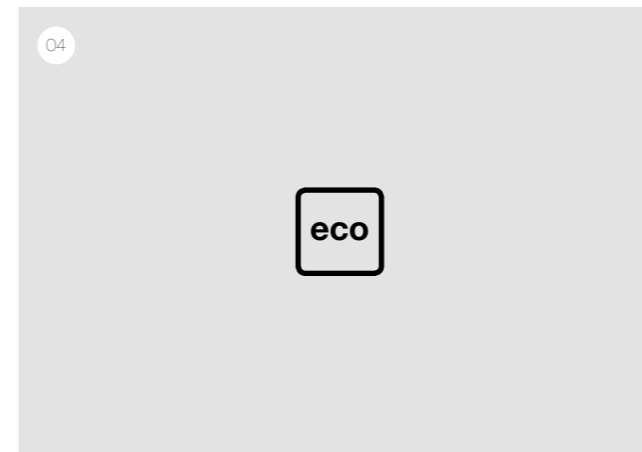





# CABINETS

CONCEPT



## RANGE OF CABINETS AND CHARACTERISTICS

CHARACTERISTICS	CONCEPT GASTRONORM	CONCEPT SNACK
<b>DIMENSIONS</b> (1 door)	693 x 826 x 2,008	693 x 726 x 2,067
<b>EXTERIOR MATERIAL</b>	STAINLESS STEEL	STAINLESS STEEL
<b>INTERNAL SIDE</b>	RACKS AND GUIDES	RACKS AND GUIDES
<b>CAPACITY</b> (No. of levels 1 door cabinet)	18 x GN 2/1	18 x Snack
<b>ENERGY EFFICIENCY CLASS</b> (1 door refrigerated cabinet)		
<b>INSULATION</b>	50 mm	50 mm
<b>COOLANT +/-</b>	R-134a / R-404A	R-134a / R-404A
<b>CLIMATIC CLASS</b>	4	4
<b>REFRIGERATION UNIT</b>	INTERNAL	INTERNAL
<b>LIGHTING</b> (Refrigerated cabinets)	LED	LED
<b>ECO MODE</b>	YES	YES
<b>PROTECTION GRADE</b>	IPX5	IPX5

# COUNTERS

CONCEPT

## RANGE OF COUNTERS AND CHARACTERISTICS

CHARACTERISTICS	CONCEPT 700 - GASTRONORM	CONCEPT 600 - SNACK
<b>DIMENSIONS</b> (3 doors)	1,792 x 700 x 850	2,017 x 600 x 850
<b>EXTERIOR MATERIAL</b>	STAINLESS STEEL	STAINLESS STEEL
<b>INTERNAL SIDE</b>	Rack integrated inside the device removable without screws	
<b>CAPACITY</b> (No. of levels per door)	9/3	9/4
<b>ENERGY EFFICIENCY CLASS</b>		
<b>INSULATION</b>	50 mm	50 mm
<b>COOLANT +/-</b>	R-134a / R-404A	R-134a / R-404A
<b>CLIMATIC CLASS</b>	4	4
<b>REFRIGERATION UNIT</b>	INTERNAL	INTERNAL
<b>LIGHTING</b> (Counters with glass doors)	LED	LED
<b>ECO MODE</b>	YES	YES
<b>PROTECTION GRADE</b>	IPX5	IPX5

# A SOLUTION FOR EVERY NEED

NEO fits the needs of every user thanks to its wide range of options.

## CABINETS

### STANDARD VERSIONS IN OUR CATALOGUE

	FRIDGE			FREEZER		MIXED FRIDGE AND FREEZE		DOUBLE FRIDGE		MIXED FRIDGE AND FISH		PAstry	FISH
	LARGE DOORS	GLASS DOORS	MEDIUM DOORS	LARGE DOORS	MEDIUM DOORS	LARGE DOORS	MEDIUM DOORS	LARGE DOORS	MEDIUM DOORS	LARGE DOORS	MEDIUM DOORS	LARGE DOORS	LARGE DOORS
CONCEPT GASTRONORM	●	●	●	●	●	●	●	●	●	●	●	-	-
CONCEPT SNACK	●	●	●	●	●	●	●	-	-	●	●	●	●

### OPTIONAL VERSIONS ON DEMAND

	TROPICALISED	HACCP	REVERSED OPENING (*)	OPENING PEDAL (*)	WHEELED	LOCK (*)	MEAT BAR
CONCEPT GASTRONORM	○	-	○	-	○	○	-
CONCEPT SNACK	○	-	○	-	○	○	○

\*\* Only in large doors

## COUNTERS

### STANDARD VERSIONS IN OUR CATALOGUE

	REFRIGERATED WALL WORKTOPS								WALL WORKTOP FREEZERS		CENTRAL REFRIGERATED COUNTERS
	BUILT-IN COOLING UNIT				REMOTE COOLING UNIT				BUILT-IN COOLING UNIT	REMOTE COOLING UNIT	BUILT-IN COOLING UNIT
	STANDARD DOORS	WITH SINK	GLASS DOORS	TWO-DRAWER SETS	STANDARD DOORS	GLASS DOORS	TWO-DRAWER SETS	STANDARD DOORS	STANDARD DOORS	STANDARD DOORS	
CONCEPT GASTRONORM 700	●	●	●	●	●	●	●	●	●	●	
CONCEPT SNACK 600	●	●	●	●	●	○	●	●	●	-	
REFRIGERATED PREPARATION COUNTERS	●	-	-	-	-	-	-	-	-	-	

### OPTIONAL VERSIONS ON DEMAND\*

	REFRIGERATED WALL WORKTOPS								WALL WORKTOP FREEZERS								CENTRAL REFRIGERATED COUNTERS			
	BUILT-IN COOLING UNIT				REMOTE COOLING UNIT				BUILT-IN COOLING UNIT				REMOTE COOLING UNIT				BUILT-IN COOLING UNIT			
	COOLING UNIT ON THE LEFT	WORKTOP WITHOUT SPLASHBACK	COUNTER WITHOUT WORKTOP	THREE-DRAWER SETS	WHEELED	LOCK	WORKTOP WITHOUT SPLASHBACK	COUNTER WITHOUT WORKTOP	THREE-DRAWER SETS	LOCK	COOLING UNIT ON THE LEFT	WORKTOP WITHOUT SPLASHBACK	COUNTER WITHOUT WORKTOP	WHEELED	LOCK	WORKTOP WITHOUT SPLASHBACK	COUNTER WITHOUT WORKTOP	LOCK	COUNTER WITHOUT WORKTOP	CON RUEDAS
CONCEPT GASTRONORM 700	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
CONCEPT SNACK 600	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	-	-
REFRIGERATED PREPARATION COUNTERS	-	-	-	-	○	○	-	-	-	○	-	-	-	-	○	-	-	○	-	-

● Standard available    ○ Optional    - Not available



# CONCEPT | GASTRONORM

## REFRIGERATED CABINETS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAFP-801	50	1	E	596	1.052	227	R-134a	693x826x2.008
	60		-					
CAFP-802	50	2	E	596	1.052	227	R-134a	693x826x2.008
	60		-					
CAFP-1602	50	2	F	1.301	1.938	325	R-134a	1.388x826x2.008
	60		-					
CAFP-1603	50	3	F	1.301	1.938	325	R-134a	1.388x826x2.008
	60		-					
CAFP-1604	50	4	F	1.301	1.938	325	R-134a	1.388x826x2.008
	60		-					

## FREEZER CABINETS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAFN-801	50	1	G	596	3.689	879	R-404A	693x826x2.008
	60		-					
CAFN-802	50	2	G	596	3.689	884	R-404A	693x826x2.008
	60		-					
CAFN-1602	50	2	G	1.301	6.607	1.759	R-404A	1.388x826x2.008
	60		-					
CAFN-1603	50	3	G	1.301	6.607	1.764	R-404A	1.388x826x2.008
	60		-					
CAFN-1604	50	4	G	1.301	6.607	1.770	R-404A	1.388x826x2.008
	60		-					

## REFRIGERATED DISPLAY CABINETS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAEP-801	50	1	-	596	-	227	R-134a	693x826x2.008
	60		-					
CAEP-802	50	2	-	596	-	227	R-134a	693x826x2.008
	60		-					
CAEP-1602	50	2	-	1.301	-	325	R-134a	1.388x826x2.008
	60		-					

## MIXED REFRIGERATION AND FREEZER CABINETS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAF-1602 MIX	50	1+1	-	1.192	-	314+832	R-134a+R-404A	1.388x826x2.008
	60		-					

## REFRIGERATION CABINETS WITH FREEZER COMPARTMENTS




MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAF-802 C	50	1+1 freezer tanks	-	596	-	238+954	R-404A	693x826x2.008
	60		-					
CAF-1603 C	50	2+1 freezer tanks	-	1.301	-	359 + 1036	R-134a+R-404A	1.388x826x2.008
	60		-					
CAF-1604 C	50	3+1 freezer tanks	-	1.301	-	359 + 1036	R-134a+R-404A	1.388x826x2.008
	60		-					

## REFRIGERATION CABINETS WITH COMPARTMENTS FOR FISH



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAF-802 P	50	1+1 fish tank	G	596	978	387+505	R-404A	693x826x2.008
	60		-					
CAF-1603 P	50	2+1 fish tank	E	1.301	1.340	508+567	R-134a+R-404A	1.388x826x2.008
	60		-					
CAF-1604 P	50	3+1 fish tank	E	1.301	1.340	508+567	R-134a+R-404A	1.388x826x2.008
	60		-					

## TWO-TEMPERATURE REFRIGERATION CABINETS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAFP-802/2	50	1+1	G	596	978	416+160	R-134a	693x826x2.008
	60		-					
CAFP-1602/2	50	1+1	E	1.301	1.052	287+287	R-134a	1.388x826x2.008
	60		-					
CAFP-1603/2	50	2+1	E	1.301	1.052	287+287	R-134a	1.388x826x2.008
	60		-					
CAFP-1604/2	50	3+1	E	1.301	1.052	287+287	R-134a	1.388x826x2.008
	60		-					

# CONCEPT | SNACK

## REFRIGERATION CABINETS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAFP-701	50	1	F	506	1.079	258	R-134a	693x726x2.067
	60		-					
CAFP-702	50	2	F	506	1.079	258	R-134a	693x726x2.067
	60		-					
CAFP-1402	50	2	G	1.109	1.938	356	R-134a	1.388x726x2.067
	60		-					
CAFP-1403	50	3	G	1.109	1.938	356	R-134a	1.388x726x2.067
	60		-					
CAFP-1404	50	4	G	1.109	1.938	356	R-134a	1.388x726x2.067
	60		-					

## FREEZER CABINET



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAFN-701	50	1	G	506	3.541	879	R-404A	693x726x2.067
	60		-					
CAFN-702	50	2	G	506	3.541	884	R-404A	693x726x2.067
	60		-					
CAFN-1402	50	2	G	1.109	6.607	1.679	R-404A	1.388x726x2.067
	60		-					
CAFN-1403	50	3	G	1.109	6.607	1.684	R-404A	1.388x726x2.067
	60		-					
CAFN-1404	50	4	G	1.109	6.607	1.690	R-404A	1.388x726x2.067
	60		-					

## REFRIGERATED DISPLAY CABINETS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAEP-701	50	1	-	506	-	258	R-134a	693x726x2.067
	60		-					
CAEP-1402	50	2	-	1.109	-	356	R-134a	1.388x726x2.067
	60		-					

## MIXED REFRIGERATION AND FREEZER CABINETS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAF-1402 MIX	50	1+1	-	1.012	-	285+863	R-134a+R-404A	1.388x726x2.067
	60		-					

## REFRIGERATION CABINETS WITH FREEZER COMPARTMENTS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAF-702 C	50	1+1 fish tanks	-	506	-	238+794	R-404A	693x726x2.067
	60		-					
CAF-1403 C	50	2+1 freezer tanks	-	1.109	-	359+495	R-134a+R-404A	1.388x726x2.067
	60		-					
CAF-1404 C	50	3+1 freezer tanks	-	1.109	-	359+495	R-134a+R-404A	1.388x726x2.067
	60		-					

## REFRIGERATION CABINETS WITH COMPARTMENTS FOR FISH



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAF-702 P	50	1+1 freezer tank	G	506	978	387+425	R-404A	693x726x2.067
	60		-					
CAF-1403 P	50	2+1 freezer tank	E	1.109	1.340	537+456	R-134a+R-404A	1.388x726x2.067
	60		-					
CAF-1404 P	50	3+1 freezer tank	E	1.109	1.340	537+456	R-134a+R-404A	1.388x726x2.067
	60		-					

## REFRIGERATION CABINETS FOR PASTRIES



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAPP-701	50	1	G	574	1.132	227	R-134a	760x729x2.005
	60		-					

## REFRIGERATION CABINETS FOR FISH



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CAP-701	50	1	-	574	-	594	R-134a	760x729x2.005
	60		-					

# CONCEPT | 700 GASTRONORM

## REFRIGERATED COUNTERS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CMFP-135-GN	50	2	C	274	883	247	R-134a	1.342x700x850
	60	-	-	-	-	-	-	-
CMFP-180-GN	50	3	C	428	950	287	R-134a	1.792x700x850
	60	-	-	-	-	-	-	-
CMFP-225-GN	50	4	D	581	1.314	385	R-134a	2.242x700x850
	60	-	-	-	-	-	-	-

## FREEZER COUNTERS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CMFN-135-GN	50	2	G	274	3.412	794	R-404A	1.342x700x850
	60	-	-	-	-	-	-	-
CMFN-180-GN	50	3	G	428	3.752	876	R-404A	1.792x700x850
	60	-	-	-	-	-	-	-

## REFRIGERATED COUNTERS WITH DRAWERS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CMFP-135-GN HD	50	2 drawers 1 door	C	274	883	247	R-134a	1.342x700x850
	60	-	-	-	-	-	-	-
CMFP-135-GN HH	50	4 drawers	C	274	883	247	R-134a	1.342x700x850
	60	-	-	-	-	-	-	-
CMFP-180-GN HDD	50	2 drawers 2 doors	C	428	950	287	R-134a	1.792x700x850
	60	-	-	-	-	-	-	-
CMFP-180-GN HHD	50	4 drawers 1 door	C	428	950	287	R-134a	1.792x700x850
	60	-	-	-	-	-	-	-
CMFP-180-GN HHH	50	6 drawers	C	428	950	287	R-134a	1.792x700x850
	60	-	-	-	-	-	-	-
CMFP-225-GN HDDD	50	2 drawers 3 doors	D	581	1.314	385	R-134a	2.242x700x850
	60	-	-	-	-	-	-	-
CMFP-225-GN HHDD	50	4 drawers 2 doors	D	581	1.314	385	R-134a	2.242x700x850
	60	-	-	-	-	-	-	-
CMFP-225-GN HHHD	50	6 drawers 1 door	D	581	1.314	385	R-134a	2.242x700x850
	60	-	-	-	-	-	-	-
CMFP-225-GN HHHH	50	8 drawers	D	581	1.314	385	R-134a	2.242x700x850
	60	-	-	-	-	-	-	-

## REFRIGERATED COUNTERS WITH GLASS DOORS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CMFP-135-GN PC	50	2	-	274	-	247	R-134a	1.342x700x850
	60	-	-	-	-	-	-	-
CMFP-180-GN PC	50	3	-	428	-	287	R-134a	1.792x700x850
	60	-	-	-	-	-	-	-
CMFP-225-GN PC	50	4	-	581	-	385	R-134a	2.242x700x850
	60	-	-	-	-	-	-	-

## REFRIGERATED COUNTERS WITH SINK



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CMFP-135-GN-F	50	2	C	274	883	247	R-134a	1.342x700x850
	60	-	-	-	-	-	-	-
CMFP-180-GN-F	50	3	C	428	950	287	R-134a	1.792x700x850
	60	-	-	-	-	-	-	-
CMFP-225-GN-F	50	4	D	581	1.314	385	R-134a	2.242x700x850
	60	-	-	-	-	-	-	-

## REFRIGERATED CENTRAL COUNTERS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CMCP-135-GN	50	2+2	-	274	-	247	R-134a	1.342x778x850
	60	-	-	-	-	-	-	-
CMCP-180-GN	50	3+3	-	428	-	287	R-134a	1.792x778x850
	60	-	-	-	-	-	-	-
CMCP-225-GN	50	4+4	-	581	-	385	R-134a	2.242x778x850
	60	-	-	-	-	-	-	-

## REFRIGERATED BASES MODELS WITH DOORS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT
CMFP-135-BP	50	2	C	177	747	247	R-134a
	60	-	-	-	-	-	-
CMFP-180-BP	50	3	C	277	767	287	R-134a
	60	-	-	-	-	-	-
CMFP-225-BP	50	4	D	377	1.314	385	R-134a
	60	-	-	-	-	-	-

## REFRIGERATED BASES MODELS WITH DRAWERS 2/3



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT
CMFP-135-B	50	2 drawers	C	177	747	247	R-134a
	60	-	-	-	-	-	-
CMFP-180-B	50	3 drawers	C	277	767	287	R-134a
	60	-	-	-	-	-	-
CMFP-225-B	50	4 drawers	D	377	1.314	385	R-134a
	60	-	-	-	-	-	-

## REFRIGERATED BASES MODELS WITH DRAWERS 1/3 AND 2/3



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT
CMFP-135-B2	50	2 drawers 1/3	C	177	747	247	R-134a
	60	1 drawer 2/3	-	-	-	-	-
CMFP-180-B2	50	4 drawers 1/3	C	277	767	287	R-134a
	60	1 drawer 2/3	-	-	-	-	-
CMFP-225-B2	50	6 drawers 1/3	D	377	1.314	385	R-134a
	60	1 drawer 2/3	-	-	-	-	-

# CONCEPT | 600 SNACK

## REFRIGERATED COUNTERS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
C MSP-150	50	2	C	268	767	247	R-134a	1.492x600x850
	60		-					
C MSP-200	50	3	C	416	951	287	R-134a	2.017x600x850
	60		-					
C MSP-250	50	4	D	564	1.314	385	R-134a	2.542x600x850
	60		-					

## FREEZER COUNTERS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
C MSN-150	50	2	G	268	3.447	796	R-404A	1.492x600x850
	60		-					
C MSN-200	50	3	G	416	3.824	879	R-404A	2.017x600x850
	60		-					

## REFRIGERATED COUNTERS WITH DRAWERS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
C MSP-150-HD	50	2 drawers 1 door	C	268	767	247	R-134a	1.492x600x850
	60		-					
C MSP-150-HH	50	4 drawers	C	268	767	247	R-134a	1.492x600x850
	60		-					
C MSP-200-HDD	50	2 drawers 2 doors	C	416	951	287	R-134a	2.017x600x850
	60		-					
C MSP-200-HHD	50	4 drawers 1 door	C	416	951	287	R-134a	2.017x600x850
	60		-					
C MSP-200-HHH	50	6 drawers	C	416	951	287	R-134a	2.017x600x850
	60		-					
C MSP-250-HDDD	50	2 drawers 3 doors	D	564	1.314	385	R-134a	2.542x600x850
	60		-					
C MSP-250-HHDD	50	4 drawers 2 doors	D	564	1.314	385	R-134a	2.542x600x850
	60		-					
C MSP-250-HHHH	50	6 drawers 1 door	D	564	1.314	385	R-134a	2.542x600x850
	60		-					
C MSP-250-HHHH	50	8 drawers	D	564	1.314	385	R-134a	2.542x600x850
	60		-					

## REFRIGERATED COUNTERS WITH GLASS DOORS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
C MSP-150-PC	50	2	-	268	-	247	R-134a	1.492x600x850
	60		-					
C MSP-200-PC	50	3	-	416	-	287	R-134a	2.017x600x850
	60		-					
C MSP-250-PC	50	4	-	564	-	385	R-134a	2.542x600x850
	60		-					

## REFRIGERATED COUNTERS WITH SINK



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
C MSP-150-F	50	2	C	268	767	247	R-134a	1.492x600x850
	60		-					
C MSP-200-F	50	3	C	416	951	287	R-134a	2.017x600x850
	60		-					
C MSP-250-F	50	4	D	564	1.314	385	R-134a	2.542x600x850
	60		-					

## REFRIGERATED FRONT COUNTERS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
C FMP-150	50	2	C	355	840	247	R-134a	1.492x600x1.045
	60		-					
C FMP-202	50	3	C	551	1.008	287	R-134a	2.017x600x1.045
	60		-					
C FMP-255	50	4	C	747	1.032	385	R-134a	2.542x600x1.045
	60		-					

## REFRIGERATED FRONT COUNTERS WITH GLASS DOORS



MODEL	Hz.	NO. OF DOORS	ENERGY EFFICIENCY CLASS	GROSS CAPACITY (L)	ANNUAL ENERGY CONSUMPTION (kW-h)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
C FMP-150 PC	50	2	-	355	-	247	R-134a	1.492x600x1.045
	60		-					
C FMP-202 PC	50	3	-	551	-	287	R-134a	2.017x600x1.045
	60		-					
C FMP-255 PC	50	4	-	747	-	385	R-134a	2.542x600x1.045
	60		-					

# REFRIGERATED WALL DISPLAYS (BACK BAR COOLERS)

New range of bar back coolers with a modern and elegant design that offers several options and finishes to suit your business's different needs.

01.

### EASY ACCESS FOR MAINTENANCE OPERATIONS

External compact cooling unit with cassette system for increased storage capacity. Easy to remove grid door for easy cleaning and maintenance operations.

02.

### ENERGY SAVING

Double pane doors with argon gas for optimized insulation and energy saving.

03.

### EVEN DISTRIBUTION OF COLD AIR

Hermetically sealed compressor with ventilated condenser. "U" shaped air circulation for an even distribution of cold air inside the unit.

04.

### VISIBILITY

LED lighting system.



ERM SERIES REFRIGERATED WALL DISPLAY CABINETS

MODEL	No. OF DOORS	GROSS CAPACITY (L)	BOTTLES CAPACITY (75cl)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
ERM-150	1	142	49	163	R-134a	625x520x900
ERM-250	2	214	77	400	R-134a	925x520x900
ERM-350	3	327	119	302	R-134a	1.375x520x900

EBBC SERIES REFRIGERATED DISPLAY CASES



MODEL	No. OF DOORS	GROSS CAPACITY (L)	BOTTLES CAPACITY (75cl)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
EBBC2	2	300	200	555	R-290	1.544x535x860
EBBC3	3	510	290	556	R-290	2.105x535x860

ERMU SERIES REFRIGERATED WALL DISPLAY CABINETS

MODEL	NO. OF DOORS	GROSS CAPACITY (L)	BOTTLES CAPACITY (75cl)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
ERMU-150 SS	1	142	49	163	R-134a	625x520x800
ERMU-250 SS	2	214	77	400	R-134a	925x520x800
ERMU-350 SS	3	327	119	302	R-134a	1.375x520x800
ERMU-150	1	142	49	163	R-134a	625x520x800
ERMU-250	2	214	77	400	R-134a	925x520x800
ERMU-350	3	327	119	302	R-134a	1.375x520x800

01.

### ENERGY SAVING

Double pane doors with high thermal protection.

02.

### VISIBILITY

LED lighting system.

03.

### HYGIENE

Easy to remove plastic covered steel shelves and door seals for easy cleaning.

04.

### TECHNOLOGY

High quality components to ensure reliability. Optimised parameters after laboratory testing.

## CONCEPT | PASTRY COUNTERS - DEPTH 800 mm



PASTRY COUNTERS

MODEL	HZ.	No. OF DOORS	GROSS CAPACITY (L)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
CMPP-150	50 60	2	376	218	R-134a	1.492x800x850
CMPP-202	50 60	3	584	356	R-134a	2.017x800x850
CMPP-255	50 60	4	792	356	R-134a	2.542x800x850

ERM SERIES REFRIGERATED WALL DISPLAY CABINETS (INOX)



MODEL	No. OF DOORS	GROSS CAPACITY (L)	BOTTLES CAPACITY (75cl)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
ERM-150 SS	1	142	49	163	R-134a	625x520x900
ERM-250 SS	2	214	77	400	R-134a	925x520x900
ERM-350 SS	3	327	119	302	R-134a	1.375x520x900

COUNTERS WITH INGREDIENTS CABINET





MODEL	GLASS COVER	TUBS CAPACITY	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
MI-150	Diagram	6*GN 1/4	178	R-134a	1.496x336x450
MI-202	Diagram	9*GN 1/4	178	R-134a	2.019x336x450
MIT-150	Folding stainless steel cover	6*GN 1/4	178	R-134a	1.469x336x250
MIT-202	Folding stainless steel cover	9*GN 1/4	178	R-134a	2.019x336x250

# CONCEPT | PIZZA COUNTERS - DEPTH 700 mm





## PROFESSIONAL COUNTERS FOR PIZZA

MODEL	Hz.	No. OF DOORS	GROSS CAPACITY (L)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
 CMPZ-160	50 60	2	325	288	R-134a	1.590x700x880
 CMPZ-210	50 60	3	505	288	R-134a	2.110x700x880




## COMPACT COUNTERS FOR PIZZA

MODEL	Hz.	No. OF DOORS	GROSS CAPACITY (L)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
 CMPZ1-135	50 60	2	274	306	R-134a	1.350x700x1.050
 CMPZ1-180	50 60	3	428	413	R-134a	1.800x700x1.050





## COUNTERS FOR MINI PIZZA

MODEL	Hz.	No. OF DOORS	GROSS CAPACITY (L)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
 CMEP-100 G	50 60	2	177	248	R-134a	906x700x894

# CONCEPT | COUNTERS FOR SANDWICHES AND SALADS




## SALAD COUNTERS

MODEL	Hz.	No. OF DOORS	GROSS CAPACITY (L)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
 CMEP-135-GN	50 60	2	274	306	R-134a	906x700x1.010
 CMEP-180-GN	50 60	3	428	413	R-134a	1.342x700x850



## COUNTERS FOR MINI SALADS

MODEL	Hz.	No. OF DOORS	GROSS CAPACITY (L)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
 CMEP-100	50 60	2	177	248	R-134a	1.792x700x850





MISCELLANEOUS  
PRODUCTS



# ICE MAKERS

A WIDE RANGE OF PRODUCTS TO PRODUCE ICE IN A LARGE VARIETY OF SIZES AND SHAPES.

Overdimensioned condensers for hot climate conditions both for air and water refrigerated versions. Simple, reliable ice making system intended to be used with heavily lime scaled water and under hard working conditions.

01.

### VERSATILITY AND FLEXIBILITY

We have a complete range of ice making machines to meet the demand from restaurants, hotels, supermarkets, sport medicine centres, etc.

Our units provide ice in different shapes and sizes, ice cubes, granulated ice or ice flakes just to meet our customers' needs. We can also provide stackable modular units for large production as well as insulated silos for ice storage.

05.

### EFFICIENCY

Superior density insulation to ensure quality and optimise energy consumption.

02.

### TECHNOLOGY AND RELIABILITY

Tropicalised units to ensure their correct operation even under high temperature conditions (up to 43 °C). Electric board fitted with two thermostats to regulate production time and amount of stored ice.

06.

### ERGONOMICS

A design which allows an easier access to all the unit components for easier installation and maintenance procedures.

03.

### SIMPLICITY, ROBUSTNESS, RELIABILITY...

AISI-304 stainless steel frame with easily removable panel to allow access to all the unit components.

07.

### ECOLOGY

All our units are 100% recyclable since all of their components can be dismantled and recycled.

04.

### HYGIENE AND CLEANING

Fitted with a cleaning mode for easier maintenance depending on the model, to allow non-refrigerated water circulation to clear lime scale deposits. With all hygienic and sanitary guarantees.



# SOLID ICE-CUBE MAKERS

WITH BUILT-IN TANK

MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
FIM-20L	Air	☐	17	22	6	385	355	350x470x590
	Water	☐						
FIM-30S	Air	☐	20	31	15	652	425	435x605x695
	Water	☐						
FIM-30K	Air	☐	40	31	15	417	425	435x605x695
	Water	☐						
FIM-40S	Air	☐	20	40	20	870	540	435x605x695
	Water	☐						
FIM-40K	Air	☐	40	45	20	556	550	435x605x695
	Water	☐						
FIM-60S	Air	☐	20	55	25	1.087	650	515x640x830
	Water	☐						
FIM-60K	Air	☐	40	60	25	694	650	515x640x830
	Water	☐						
FIM-80S	Air	☐	20	74	35	1.522	775	645x640x860
	Water	☐						
FIM-80K	Air	☐	40	81	35	972	780	645x640x860
	Water	☐						
FIM-130S	Air	☐	20	130	75	3.261	1.350	930x565x1.050
	Water	☐						
FIM-130K	Air	☐	40	130	75	2.083	1.350	930x565x1.050
	Water	☐						

MODULAR

MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
MFIM-150S	Air	☐	20	153	-	-	1.500 - 1+N	775x625x805
	Water	☐						
MFIM-150K	Air	☐	40	153	-	-	1.500 - 1+N	775x625x805
	Water	☐						
MFIM-400S	Air	☐	20	380	-	-	3.300 - 3+N	1.321x638x978
	Water	☐						
MFIM-400K	Air	☐	40	380	-	-	3.300 - 3+N	1.321x638x978
	Water	☐						



UNITS	PRODUCTION	CUBE				HOLLOW		DICE		GRANULAR	
		kg / day	L - 17 g	S - 20 g	K - 40 g	C - 25 g	HD - 7 g	D - 13 g	Dry	Wet	
UNITS WITH BUILT-IN TANK	20	FIM-L			FIM-C						
	30		FIM-S	FIM-K	FIM-C						
	40		FIM-S	FIM-K	FIM-C						
	45								GIM		
	60		FIM-S	FIM-K	FIM-C	FICE-HD	FICE-D				
	80 - 90		FIM-S	FIM-K	FIM-C	FICE-HD	FICE-D		GIM		
MODULAR UNITS	130-140		FIM-S	FIM-K	FIM-C	FICE-HD	FICE-D			GIM	
	150		MFIM-S	MFIM-K						MGIM	
	200				MFIM-C	FICE-HD	FICE-D			MGIM	
	400		MFIM-S	MFIM-K		FICE-HD	FICE-D			MGIM	
	500									MGIM	

# HOLLOW ICE-CUBE MAKERS

## WITH BUILT-IN TANK



MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
FIM-20C	Air	U	25	20	9	360	330	405x510x690
	Water							
FIM-30C	Air	U	25	31	12	480	330	405x510x745
	Water							
FIM-40C	Air	U	25	42	18	720	355	405x510x870
	Water							
FIM-60C	Air	U	25	60	30	1.200	425	595x555x995
	Water							
FIM-90C	Air	U	25	81	37	1.480	650	675x555x995
	Water							
FIM-130C	Air	U	25	130	50	2.000	775	845x555x995
	Water							

## MODULAR



MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
MFIM-200C	Air	U	25	190	-	-	1.550	690x565x1.125
	Water							

# DICE-SHAPED ICE-CUBE MAKERS

## WITH BUILT-IN TANK



MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
FICE-60 D	Air	□	13	60	20	1.500	450	535x595x795
	Water							
FICE-60 HD	Air	□	7	60	20	3.000	450	535x595x795
	Water							
FICE-90 D	Air	□	13	90	35	2.692	550	660x700x838
	Water							
FICE-90 HD	Air	□	7	90	35	5.384	550	660x700x838
	Water							
FICE-140 D	Air	□	13	135	45	3.461	790	762x762x838
	Water							
FICE-140 HD	Air	□	7	135	45	6.923	790	762x762x838
	Water							

## MODULAR



MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
FICE-200 D	Air	□	13	220	-	-	1.120 - 1+N	762x620x500
	Water							
FICE-200 HD	Air	□	7	220	-	-	1.120 - 1+N	762x620x500
	Water							
FICE-400 D	Air	□	13	405	-	-	1.800 - 3+N	762x620x760
	Water							
FICE-400 HD	Air	□	7	405	-	-	1.800 - 3+N	762x620x760
	Water							

## STOCK DISPENSER FOR DICE ICE-CUBE MAKERS



MODEL	CAPACITY (kg)	DESCRIPTION	DIMENSIONS (mm)
DHD	104	To be installed with ice-cube makers FICE- 200 and FICE-400	769x835x1.537

## GRANULAR ICE MAKERS

### WITH BUILT-IN TANK - DRY GRANULAR ICE



MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
GIM-45	Air		-	40	-	-	460	405x515x750
	Water		-	42	-	-		
GIM-85	Air		-	85	-	-	533	465x595x795
	Water		-	-	-	-		

### WITH BUILT-IN TANK - WET GRANULAR ICE

MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
GIM-135	Air		-	135	-	-	650	515x550x1.355
	Water		-	-	-	-		

### MODULAR - WET GRANULAR ICE



MODEL	CONDENS. SYSTEM	ICE CUBE		PRODUCTION (kg/day)	TANK		POWER (W)	DIMENSIONS (mm)
		FORM	GRAMS		(kg)	ICE CUBES		
MGIM-150	Air		-	142	-	-	650 - 1+N	515x550x500
	Water		-	-	-	-		
MGIM-200	Air		-	220	-	-	780 - 1+N	515x550x575
	Water		-	-	-	-		
MGIM-400	Air		-	390	-	-	1300 - 1+N	675x550x660
	Water		-	-	-	-		
MGIM-500	Air		-	565	-	-	1700 - 1+N	675x550x800
	Water		-	-	-	-		

## TANK FOR MODULAR ICE-CUBE MAKERS (SILOS)



MODEL	CAPACITY (kg)	COMPATIBILITY	DIMENSIONS (mm)
S-220	230	See the different possible combinations at the counter	762x819x1.071
S-350	350	See the different possible combinations at the counter	1.067x819x1.067
S-500	500	See the different possible combinations at the counter	1.321x872x1.122

## WINE DISPLAY CABINETS

Our range of wine cooler cabinets provides modern and elegant solutions for wine storage and to keep bottles ready for consumption. Thanks to their innovative design, they are a decorative element to add to the elegant look of your business.

01.

### WINE KEEPING

Double pane door with tinted tempered glass and UV protection to preserve our wine bottles from direct sunlight.

02.

### VISIBILITY

LED vertical lighting to allow a perfect and even vision of the bottles on display. LED lighting does not produce any heat that might spoil the wine.

03.

### STORAGE

Its shelves are made of plastic covered grids with a black finish and each cabinet's standard equipment includes 3 flat shelves and a tipped one specially designed for the WR-180 model.

04.

### PERFECT TEMPERATURE

Thanks to our electronic control, we can keep a consistent and ideal temperature for wine ageing between +5 and +16°C.



MODEL	No. OF DOORS	GROSS CAPACITY (L)	BOTTLES CAPACITY (75cl)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
WR-180	1	130	25	135	R-600a	505x570x950
WR-300	1	400	72	215	R-600a	620x655x1.850
WR-600	2	800	144	430	R-600a	1.240x655x1.850

## BOTTLE COOLERS

Our experience as manufacturers of bottle coolers ensures a top quality and reliable product. Designed for optimal storage of bottles at any business.

01.

### RANGE VARIETY

We can provide to different versions to suit our customers' needs. Stainless Steel finished products hold the cooling unit on the right hand side, while Skin plate models have the cooling unit underneath.

02.

### FUNCTIONALITY

Sliding doors with built-in handle for easy and practical access. It is also fitted with vertical plastic covered steel separators for a better distribution of contents.



SERIE INOX

MODEL	No. OF DOORS	NO OF SEPARATOR GRIDS	GROSS CAPACITY (L)	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
BFP-100 I	2	1	223	178	R-134a	1.010x552x850
BFP-150 I	3	2	381	218	R-134a	1.500x552x850
BFP-200 I	4	3	539	258	R-134a	1.990x552x850
BFP-250 I	5	4	696	356	R-134a	2.480x552x850

## OVER COUNTER DISPLAY CASES

Some products require specific care for their conservation and presentation. Fagor Industrial offers specifically designed display cases for those products.

01.

### HYGIENE

Stainless steel inner tray with embedded bottom for GN 1/3 containers (40 mm deep) and accessible from glass sliding door. The units are fitted with waste water drains.

02.

### LIGHTING

All our units are fitted with LED lighting system according to our environmental policy that intends to optimise and reduce energy consumption.

03.

### VARIETY

Different glass sizes and shapes (flat, bended or one piece) as well as built in or remote cooling units.



SNACK DISPLAY CASE

MODEL	GLASS TYPE	CONTAINERS CAPACITY	COOLING UNIT TYPE	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
VTP-139 P	Flat	6*GN 1/3	Built-in	174	R-134a	1.380x415x278
VTP-139 C	Bended	6*GN 1/3	Built-in	174	R-134a	1.380x415x278
VTP-175 P	Flat	8*GN 1/3	Built-in	175	R-134a	1.732x415x278
VTP-175 C	Bended	8*GN 1/3	Built-in	175	R-134a	1.732x415x278
VTP-139 RP	Flat	7*GN 1/3	Remote	183	R-134a	1.380x415x278
VTP-139 RC	Bended	7*GN 1/3	Remote	183	R-134a	1.380x415x278
VTP-175 RP	Flat	9*GN1/3	Remote	184	R-134a	1.732x415x278
VTP-175 RC	Bended	9*GN1/3	Remote	184	R-134a	1.732x415x278

01.

### RELIABILITY

Static refrigeration with built-in double evaporation system on the lower tray and on the bended glass cover. This allows us to achieve optimal working temperatures (-1 °C to 2 °C) for the conservation of delicate food such as sushi.

02.

### CONSTRUCTION

Perforated stainless steel embedded inner tray ready to directly hold sushi dishes. Accessible through sliding glass door.

03.

### HYGIENE

Thanks to its emergency drain for waste liquids is one of the most hygienic cases in the market.

04.

### LIGHTING

All our units are fitted with LED lighting system according to our environmental policy that intends to optimise and reduce energy consumption.



SUSHI DISPLAY GLASS CASE

MODEL	GLASS TYPE	CONTAINERS CAPACITY	COOLING UNIT TYPE	ELECTRIC POWER (W)	COOLANT	DIMENSIONS (mm)
VTP-139 C - SUSHI	Bended	-	Built-in	174	R-134a	1.380x415x278
VTP-175 C - SUSHI	Bended	-	Built-in	175	R-134a	1.732x415x278

## REFRIGERATED CASES FOR INGREDIENTS

Ingredient cases have their own cooling units to provide total location flexibility. They are the ideal complement to turn a refrigerated counter into a complete working station for the preparation of cold dishes, pizzas or sandwiches.

### GLASS COVERED CASES FOR GN-1/4 CONTAINERS



MODEL	GLASS COVER	CONTAINERS CAPACITY	ELECTRIC POWER(W)	COOLANT	DIMENSIONS (mm)
MI-135	Flat	5*GN 1/4	178	R-134a	1.340x336x450
MI-150	Flat	6*GN 1/4	178	R-134a	1.496x336x450
MI-180	Flat	8*GN 1/4	178	R-134a	1.790x336x450
MI-202	Flat	9*GN 1/4	178	R-134a	2.019x336x450
MI-225	Flat	10*GN 1/4	216	R-134a	2.240x336x450

### CASES FOR STAINLESS STEEL GN-1/4 CONTAINERS WITH COLLAPSIBLE COVER

MODEL	GLASS COVER	CONTAINERS CAPACITY	ELECTRIC POWER(W)	COOLANT	DIMENSIONS (mm)
MIT-135	Stainless steel collapsible cover	5*GN 1/4	178	R-134a	1.340x336x250
MIT-150	Stainless steel collapsible cover	6*GN 1/4	178	R-134a	1.496x336x250
MIT-180	Stainless steel collapsible cover	8*GN 1/4	178	R-134a	1.790x336x250
MIT-202	Stainless steel collapsible cover	9*GN 1/4	178	R-134a	2.019x336x250
MIT-225	Stainless steel collapsible cover	10*GN 1/4	216	R-134a	2.240x336x250

## GLASS FROSTERS

Glass frosters are an ideal complement for bars and cafés when drinks are to be served at their best. Thanks to their compact size, they are perfect for reduced size businesses.

01.

### LIGHTING

LED lighting system.

02.

### ANTI-MIST SYSTEM

Triple glazed doors with anti-mist system that allows viewing the defrosting process.



MODEL	No. OF DOORS	T° RANK	CAPACITY (L)	ELECTRICITY CONSUMPTION (W)	COOLANT	DIMENSIONS (mm)
EC-45	1	-18 °C / -12 °C	52,5	286	R-290	558x365x763

## NON-REFRIGERATED UNITS (COFFEE AND BACK-BAR CASES)

01.

### QUALITY

All of our units are made in high quality austenitic stainless steel with sanitary finish.

02.

### HYGIENE

Worktop with rounded front and guards for easier cleaning.

03.

### VARIETY

Different lengths and widths to suit your business's needs.

04.

### ADAPTABILITY

1045 maximum height to match our range of CONCEPT Snack counters.



MODEL	NO. OF SHELVES	NO. OF DRAWERS	MODULE POSITION	WORKTOP HOLE	DIMENSIONS (mm)
MMC-100	1	1	Right	-	990x600x1.045
	1	1	Right	Yes	990x600x1.045
MMC-100 I	1	1	Left	-	990x600x1.045
	1	1	Left	Yes	990x600x1.045
MMC-150	1	2	Central	-	1.500x600x1.045
	1	2	Central	Yes	1.500x600x1.045
MMC-200	1	2	Central	-	2.025x600x1.045
	1	2	Central	Yes	2.025x600x1.045
MMC-250	1	2	Central	-	2.550x600x1.045
	1	2	Central	Yes	2.550x600x1.045

### ACCESSORIES (OPTIONAL SHELVES)

EMMC-100	For MMC-100 and MMC-150 coffee units	-	-	-	-
EMMC-200	For MMC-200 coffee unit	-	-	-	-
EMMC-250	For MMC-250 coffee unit	-	-	-	-



MODEL	NO. OF SHELVES	DIMENSIONS (mm)
MME-35/100	1	990x350x1.045
MME-35/100 2E	2	990x350x1.045
MME-35/150	1	1.500x350x1.045
MME-35/150 2E	2	1.500x350x1.045
MME-35/200	1	2.025x350x1.045
MME-35/200 2E	2	2.025x350x1.045
MME-35/250	1	2.550x350x1.045
MME-35/250 2E	2	2.550x350x1.045
MME-60/100	1	990x600x1.045
MME-60/100 2E	2	990x600x1.045
MME-60/150	1	1.500x600x1.045
MME-60/150 2E	2	1.500x600x1.045
MME-60/200	1	2.025x600x1.045
MME-60/200 2E	2	2.025x600x1.045
MME-60/250	1	2.550x600x1.045
MME-60/250 2E	2	2.550x600x1.045

FAGOR INDUSTRIAL S. COOP.  
Santxolopetegi auzoa, 22  
20560 Oñati, Gipuzkoa (España)  
T. (+34) 943 71 80 30  
F. (+34) 943 71 81 81  
info@fagorindustrial.com

[www.fagorindustrial.com](http://www.fagorindustrial.com)

