

baron

MODEL Q90BR/EM120

CODE

CR1018249

ELECTRIC BRATT PAN - MOTORISED TILTING 120 LT

QUEEN9

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- · Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas kitchens having burners with various configurations and power ratings: 3.5 kW - 5.7 kW, 7 kW and 10 kW
- · Double-ring burners for 7 and 10 kW models
- · Wide range of accessories



Technical / functional characteristics

- Water filled via solenoid valve
- · Self-balanced lid with double steel wall
- · Safety device interrupting power supply when tub is lifted
- Adjustable temperature from 100 to 280°C.
- · Heating element unit made of incoloy stainless steel heating elements;
- · Safety thermostat.

1200
900
900
400V/3N 50-60 Hz
3/4"

Cold soft water connection (Ø)	
Drain (Ø)	
Gas power (Mj/hr)	
Electric power (kW)	13.5
Plate dimensions (mm)	
Tank capacity (L)	120
Tank dimensions (mm)	
Internal oven dimensions (mm)	



Email: info@scotsice.com.au - Website: www.scotsice.com.au






MODEL Q90BR/EM120 CODE CR1018249

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

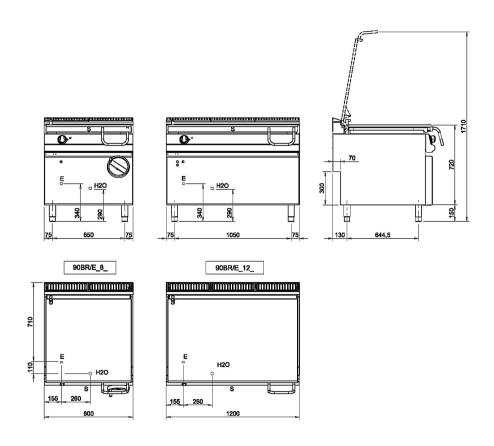

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de cable él. - Pisacable - Elektrische kabelwartel
- H20 Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4
- S Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac - Descarga cuba - Water toevoer