

MODEL

Q90PC/VCE800

CODE

CR1015959

## 4 CERAMIC GLASS BURNER ELECTRIC COOK TOP

### QUEEN9

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas kitchens having burners with various configurations and power ratings: 3.5 kW - 5.7 kW, 7 kW and 10 kW
- Double-ring burners for 7 and 10 kW models
- Wide range of accessories



### Technical / functional characteristics

- Watertight shatterproof glass-ceramic top;
- Cooking zones are marked with a 27x27 cm square serigraph print
- 4 kW single zone power;
- Temperature adjustment from 70-450°C via a thermostat;
- Heat mode activation light and residual heat indicator light.

DIMENSIONS	
Width (mm)	800
Depth (mm)	900
Height (mm)	250
Gas connection (∅)	
Electric connection (V/~ /Hz)	400V/3N 50-60 Hz
Cold water connection (∅)	
Hot water connection (∅)	

Cold soft water connection (∅)	
Drain (∅)	
Gas power (Mj/hr)	
Electric power (kW)	16
Plate dimensions (mm)	
Tank capacity (L)	
Tank dimensions (mm)	
Internal oven dimensions (mm)	

MODEL


Q90PC/VCE800

CODE

CR1015959

**SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR**

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

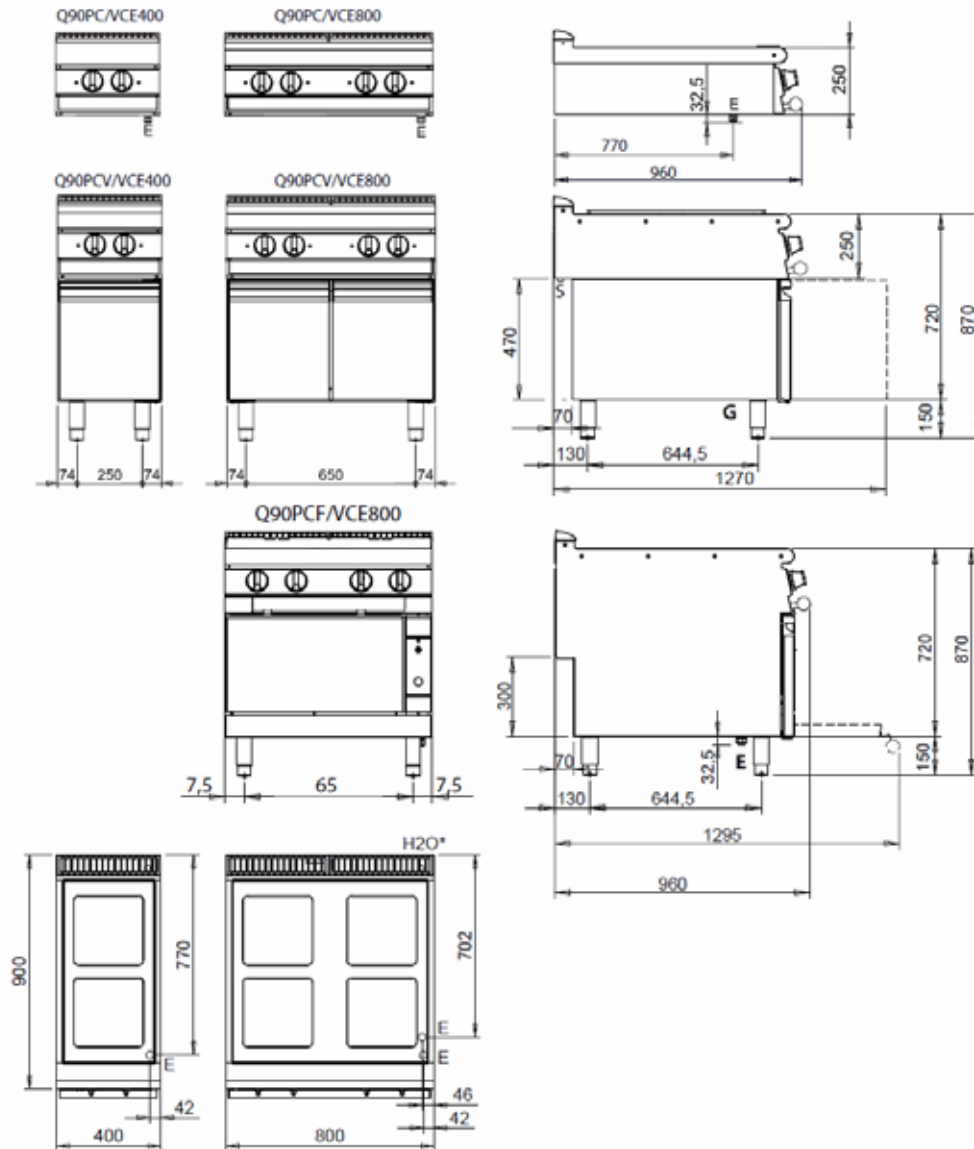

**Legenda - Legende - Key - Légende - Leyenda - Legenda**

**E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
 Presse étoupe de cable él. - Pisacable - Elektrische kabelwartel

**H2O\*** Attacco arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting  
 EN ISO 228-1 G 3/4