


Upright Cabinets

T-11G-HC~FGD01

 Super Slimline Upright Foodservice Refrigerator, 1 Full Glass Swing Door



Dimensions		Build		Technical	
External Width (mm)	487	Door Description	1 Full Glass Swing Door	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	539	Door Opening	Right (standard) or Left.	Refrigerant	R290
External Height (mm)	1855	Exterior Construction	Stainless steel front, aluminium sides & rear	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 41 mm for door handle or 26 mm for rear bumper.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	0.8
Net Volume (Litres)	186	Air Intake Position	Front	Wattage	184
Gross Volume (Litres)	311	Ventilation Position	Rear	Temperature Class	M1
Display Area (m ²)	0.47	Clearance Required	26 mm rear, zero sides	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Supplied Shelves	4	Cord Length (Meters)	2.74	Testing Standard	EN 23953
Shelf Size (L x D mm)	375 x 394	Internal Lighting	LED	EEC	A
Internal Net Height (mm)	1300	Standard w/ Locks	standard	EEL	9.1
Unpackaged Weight (kg)	89			kWh/24hr	1.53
Packaged Weight (kg)	100			kWh/Annum	562
Packaged Dimensions (W x D x H mm)	699 x 737 x 1909			Defrost Type	Auto
Supplied Supports	ø 51 mm castors (71 mm height)				



Specifications subject to change without notice.
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)
 EMEA [+41 61 563 07 05](tel:+41615630705)
 Australia [+61 2 9619 9999](tel:+61296199999)

TfIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



T-11G-HC~FGD01

Super Slimline Upright Foodservice Refrigerator, 1 Full Glass Swing Door

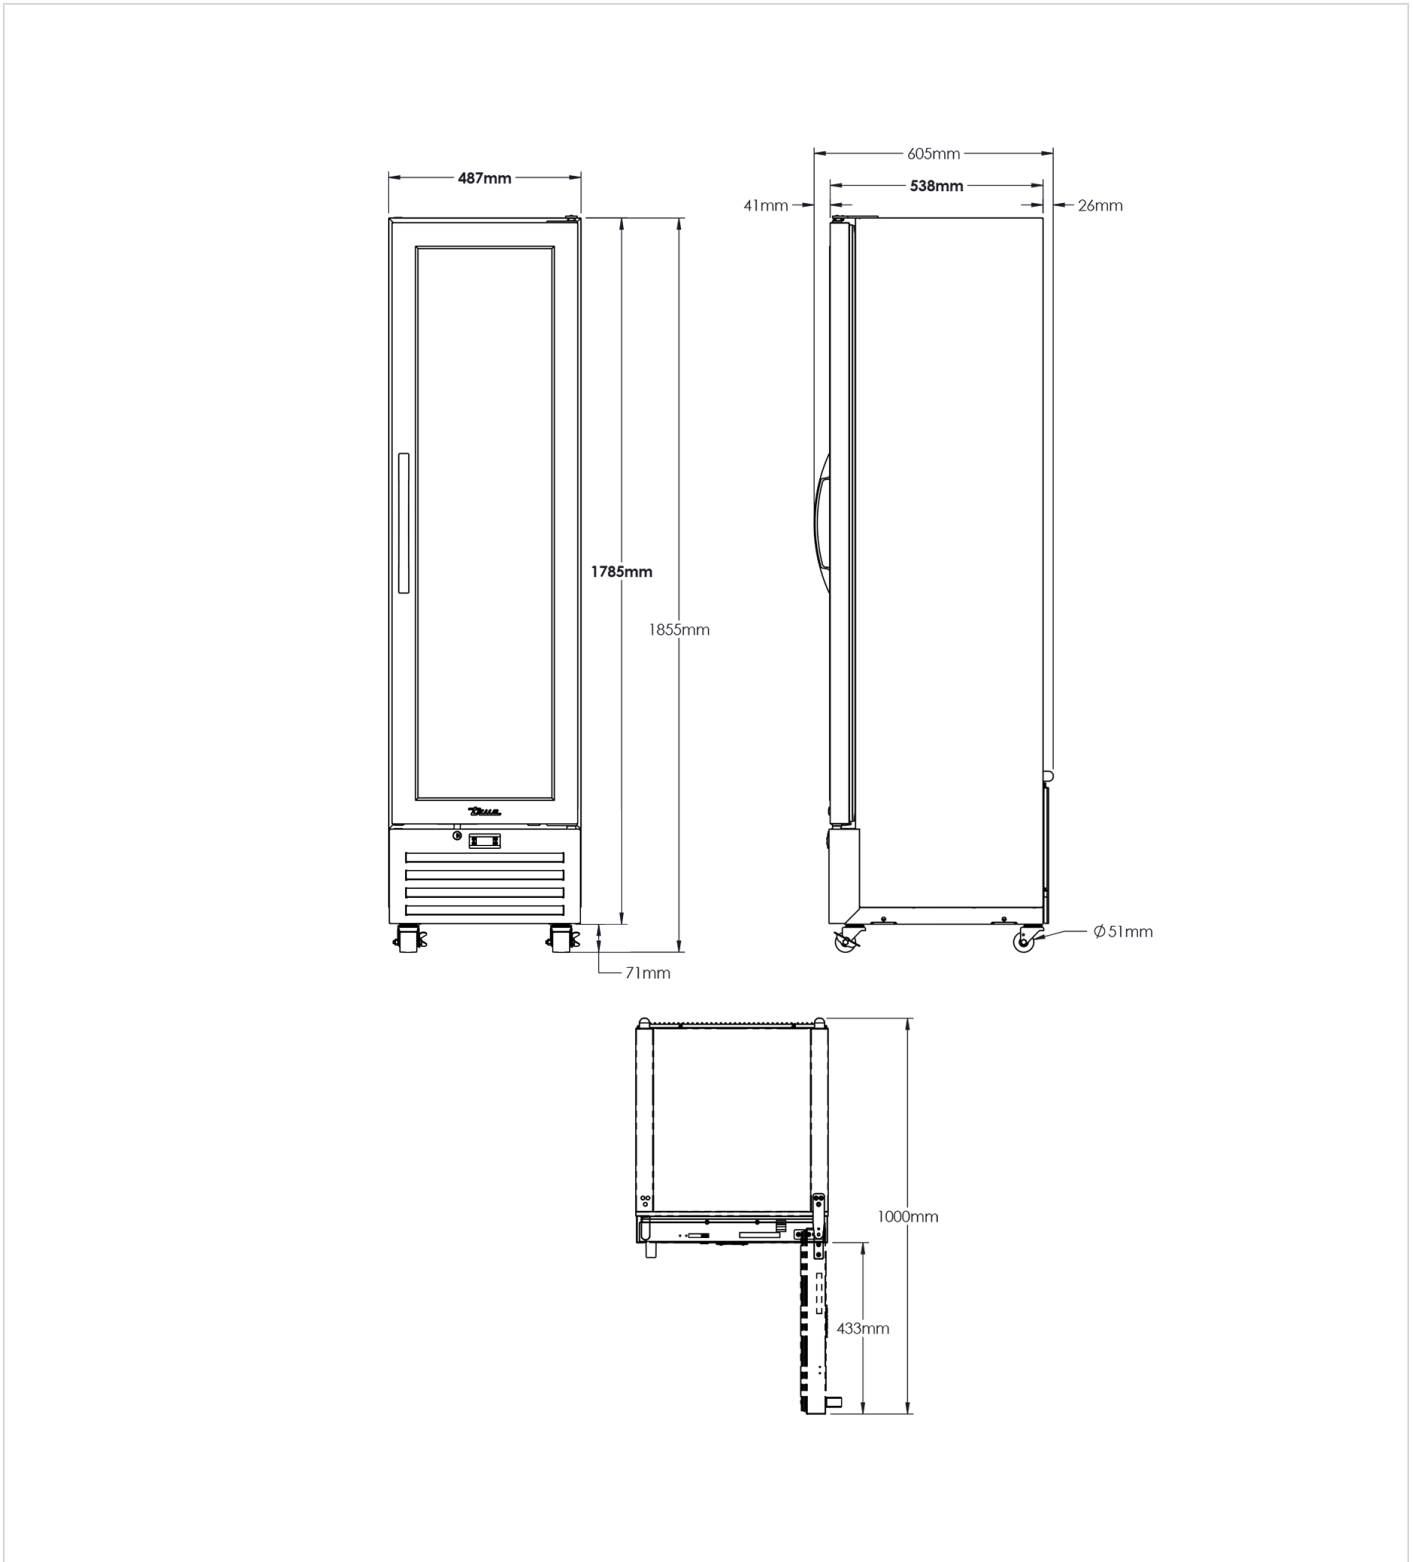

Specifications subject to change without notice.
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)
EMEA [+41 61 563 07 05](tel:+41615630705)
Australia [+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

