

Upright Cabinets

T-23G-2-HC~FGD01

 Upright Foodservice Refrigerator, 2 Half Glass Swing Doors



Dimensions		Build		Technical	
External Width (mm)	686	Door Description	2 Half Glass Swing Doors	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	750	Door Opening	Right (standard) or Left.	Refrigerant	R290
External Height (mm)	2074	Exterior Construction	Stainless steel front, aluminium sides & rear	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 42 mm for door handle or 13 mm for rear access panel.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	1.3
Net Volume (Litres)	438	Air Intake Position	Front	Wattage	299
Gross Volume (Litres)	651	Ventilation Position	Rear	Temperature Class	M1
Display Area (m ²)	0.61	Clearance Required	26 mm rear, zero sides	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Supplied Shelves	4	Cord Length (Meters)	2.74	Testing Standard	EN 23953
Shelf Size (L x D mm)	582 x 591	Internal Lighting	LED	EEC	A
Internal Net Height (mm)	1300	Standard w/ Locks	standard	EEL	8.9
Unpackaged Weight (kg)	140			kWh/24hr	1.64
Packaged Weight (kg)	151			kWh/Annum	602
Packaged Dimensions (W x D x H mm)	909 x 788 x 2134			Defrost Type	Auto
Supplied Supports	ø 64 mm castors (83 mm height)				



Specifications subject to change without notice.
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)
 EMEA [+41 61 563 07 05](tel:+41615630705)
 Australia [+61 2 9619 9999](tel:+61296199999)

TfIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



T-23G-2-HC~FGD01

Upright Foodservice Refrigerator, 2 Half Glass Swing Doors

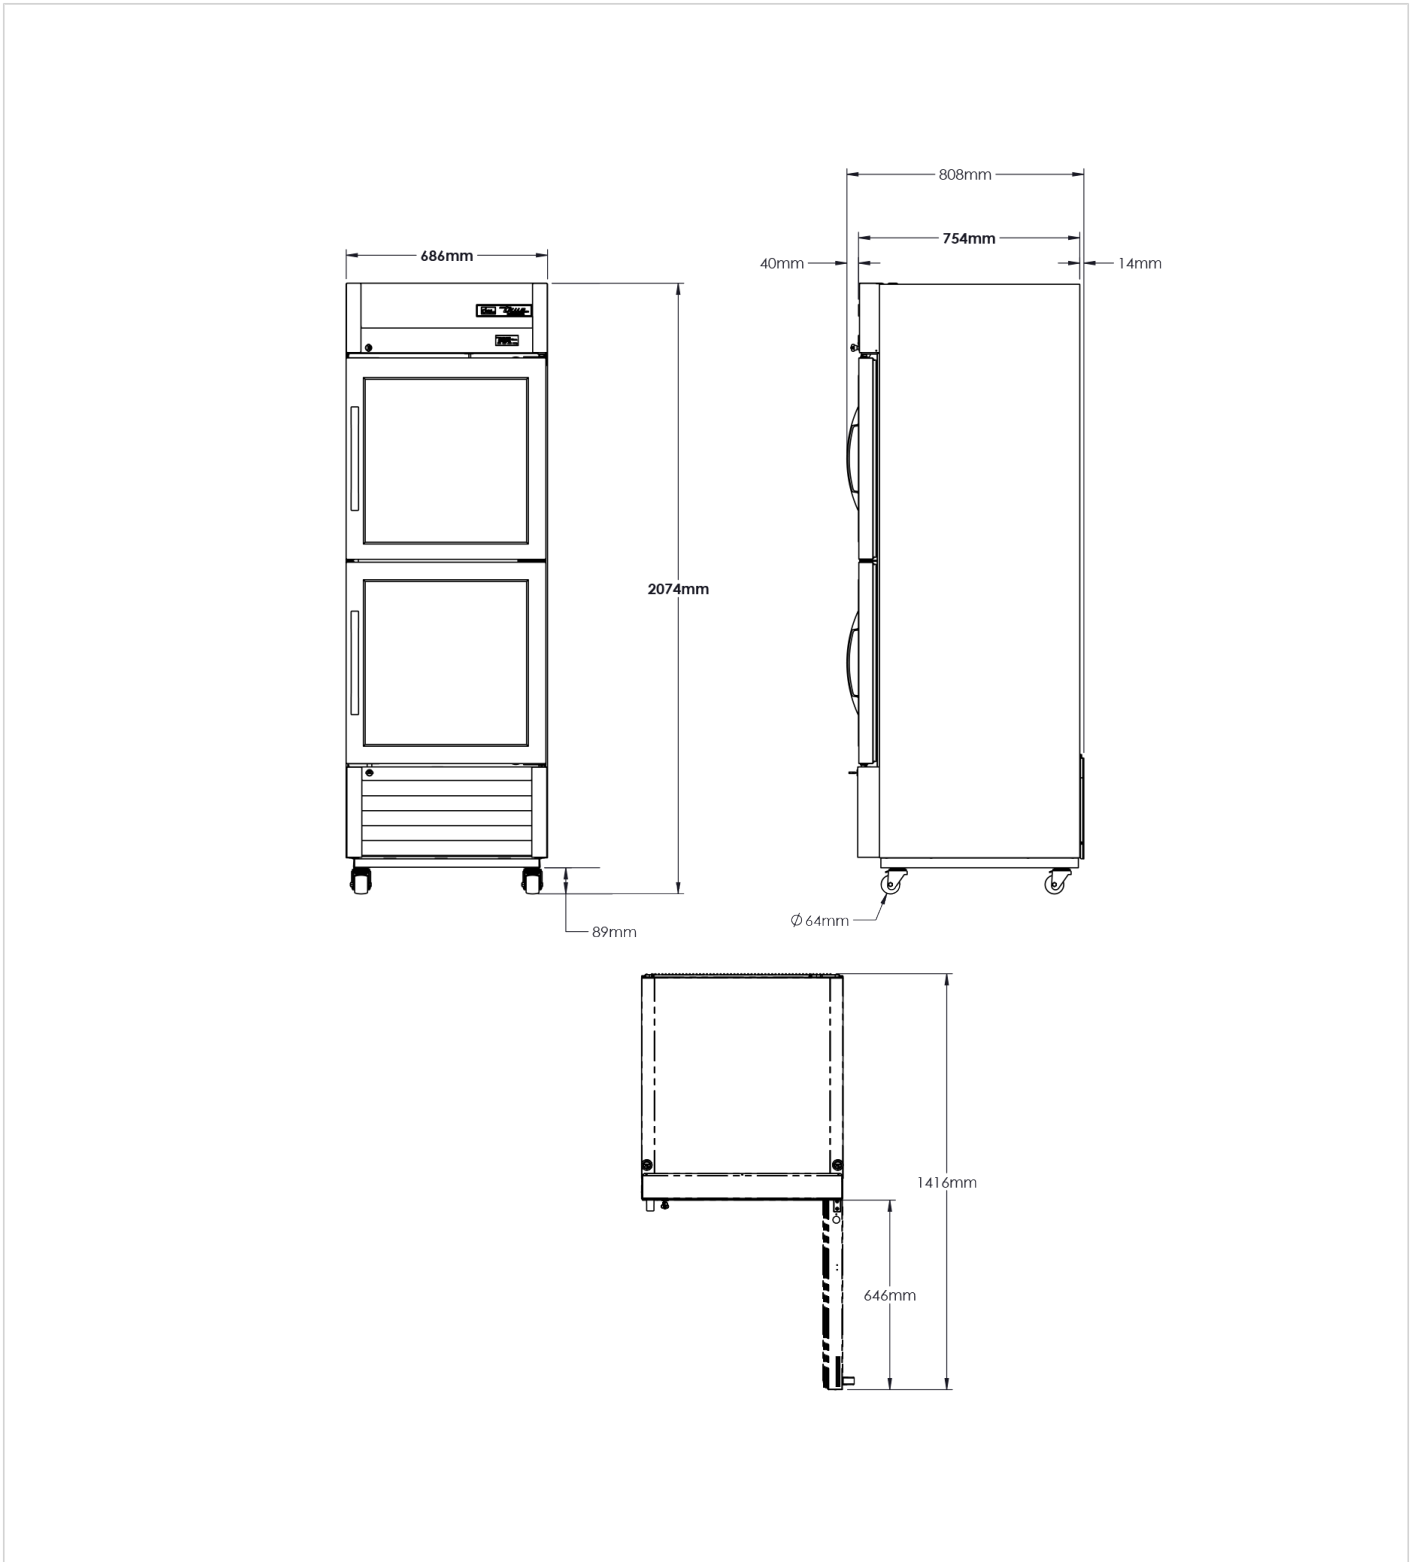

WARRANTY
PARTS, COMPRESSOR AND LABOUR
5 YEARS
natural refrigerant.

Specifications subject to change without notice.
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049
EMEA +41 61 563 07 05
Australia +61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

