

Upright Cabinets

# T-23G-PT-HC~FGD01

Upright "Pass-Thru" Display Refrigerator, 1 Glass Door Front, 1 Solid Door Rear



Dimensions		Build		Technical	
External Width (mm)	686	Door Description	1 Glass Door Front + 1 Solid Door Rear	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	818	Door Opening	Right (standard) or Left.	Refrigerant	R290
External Height (mm)	2074	Exterior Construction	Stainless steel front and rear, aluminium sides	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 41 mm for door handle.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	1.3
Net Volume (Litres)	438	Air Intake Position	Front	Wattage	299
Gross Volume (Litres)	651	Ventilation Position	Rear	Temperature Class	M1
Display Area (m <sup>2</sup> )	0.69	Clearance Required	26 mm rear, zero sides	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Supplied Shelves	4	Cord Length (Meters)	2.74	Testing Standard	EN 23953
Shelf Size (L x D mm)	582 x 591	Internal Lighting	LED	EEC	A
Internal Net Height (mm)	1300	Standard w/ Locks	standard	EEL	8.5
Unpackaged Weight (kg)	146			kWh/24hr	1.64
Packaged Weight (kg)	157			kWh/Annum	602
Packaged Dimensions (W x D x H mm)	909 x 788 x 2134			Defrost Type	Auto
Supplied Supports	ø 64 mm castors (83 mm height)				



Specifications subject to change without notice. Technical data above related to energy use based on testing of 50Hz or Dual Frequency models Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)  
 EMEA [+41 61 563 07 05](tel:+41615630705)  
 Australia [+61 2 9619 9999](tel:+61296199999)


[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



Upright Cabinets

# T-23G-PT-HC~FGD01

Upright "Pass-Thru" Display Refrigerator, 1 Glass Door Front, 1 Solid Door Rear

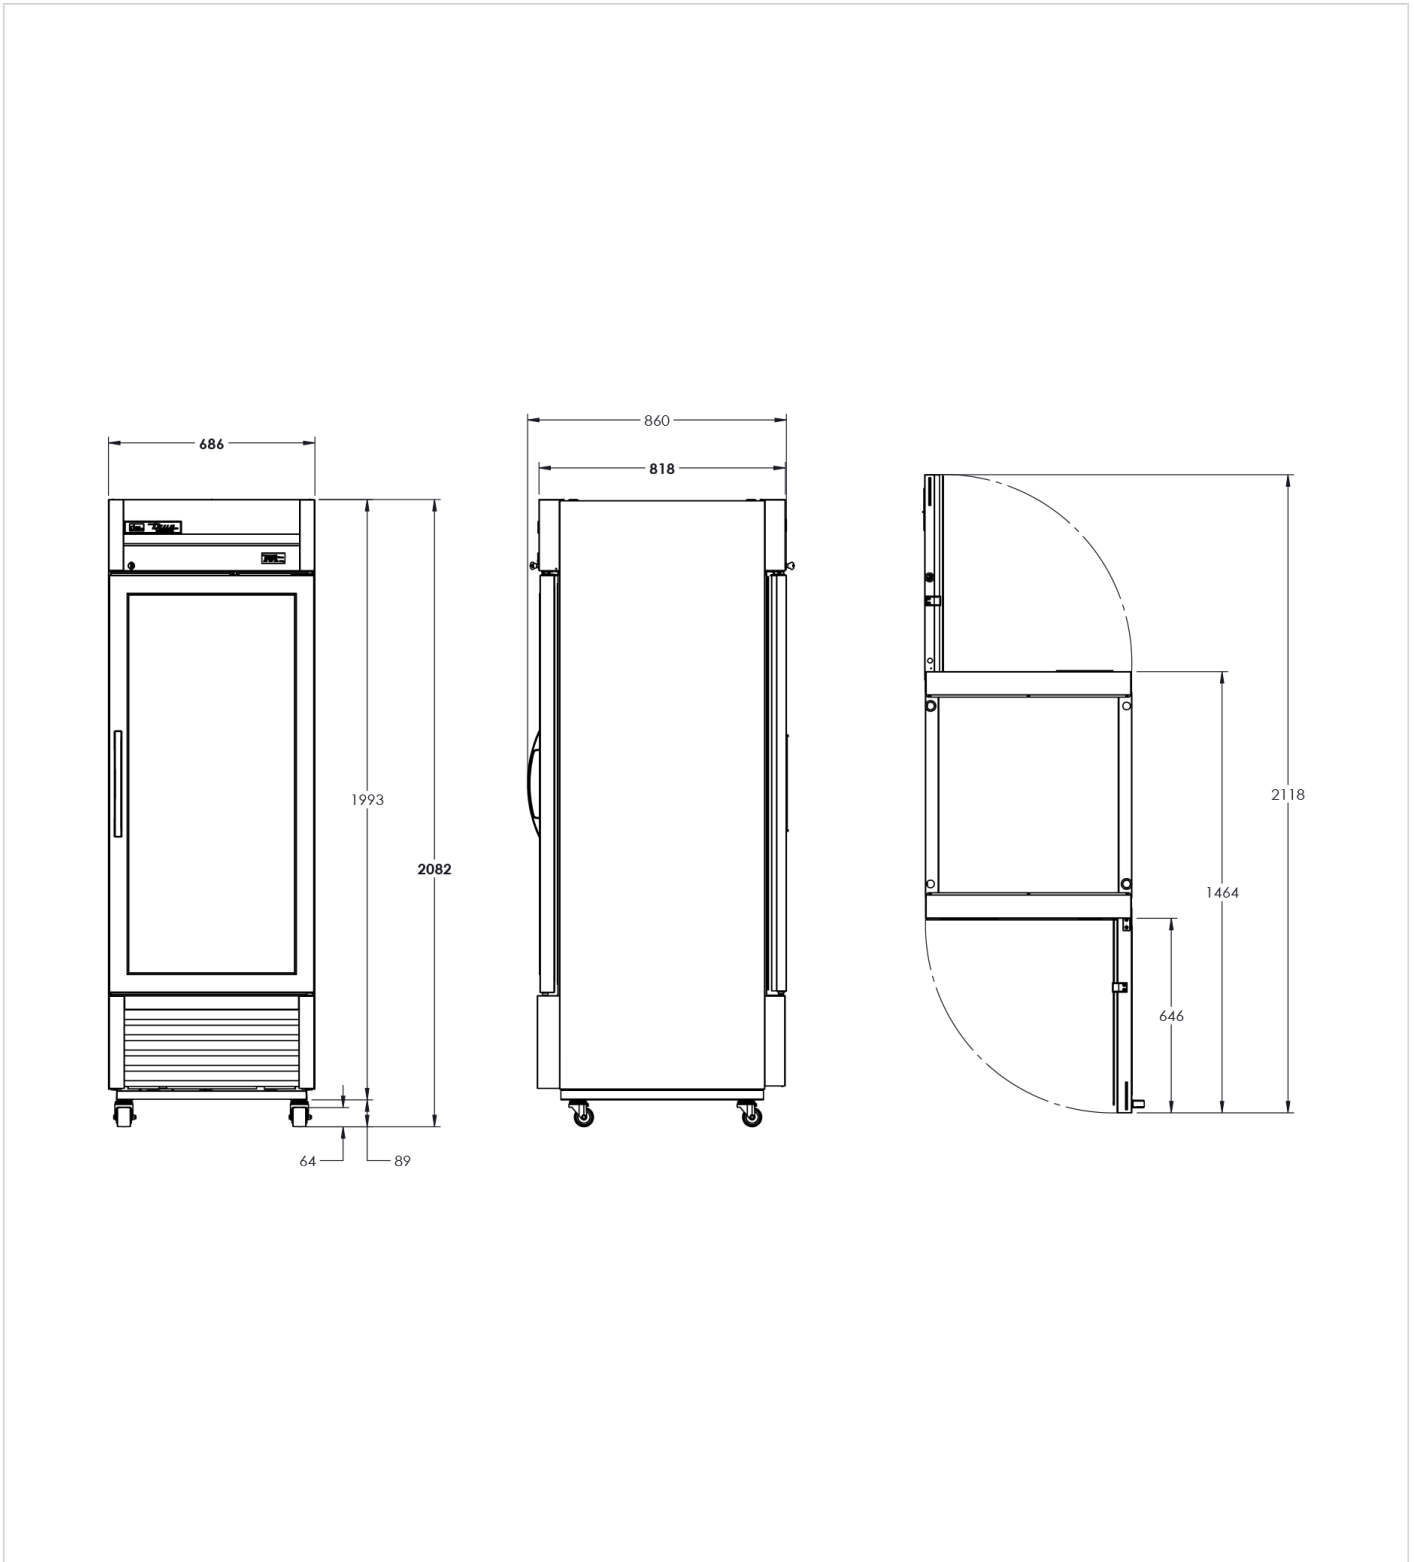

Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049  
EMEA +41 61 563 07 05  
Australia +61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

