

TDD-4CT-S

🇺🇸 Keg Chiller / Dispenser with "Club Top", Stainless Steel Ext, 3 Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	2296	Door Description	3 Solid Swing Doors	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	704	Exterior Construction	Stainless Steel front, sides & top. Galv rear.	Refrigerant	R134a
External Height (mm)	978	Interior Construction	Stainless Steel floor. Galv sides.	Voltage / Frequency / Phase	220-240V/50Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers. Height does not include 388 mm for draft tower.	Air Intake Position	Front	Amps	3.2
Gross Volume (Litres)	896	Ventilation Position	Rear	Wattage	736
Unpackaged Weight (kg)	232	Clearance Required	26 mm rear	Defrost Type	Off-Cycle
Packaged Weight (kg)	243	Cord Length (Meters)	2.13		
Packaged Dimensions (W x D x H mm)	2388 x 775 x 1143	Standard w/ Locks	standard		
Internal Capacity for Keg (L x D x H mm)	1841 x 558 x 654				
Supplied Supports	None. Castors and Legs optional				



Specifications subject to change without notice. Technical data above related to energy use based on testing of 50Hz or Dual Frequency models Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)
 EMEA [+41 61 563 07 05](tel:+41615630705)
 Australia [+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TDD-4CT-S

🇺🇸 Keg Chiller / Dispenser with "Club Top", Stainless Steel Ext, 3 Solid Swing Door

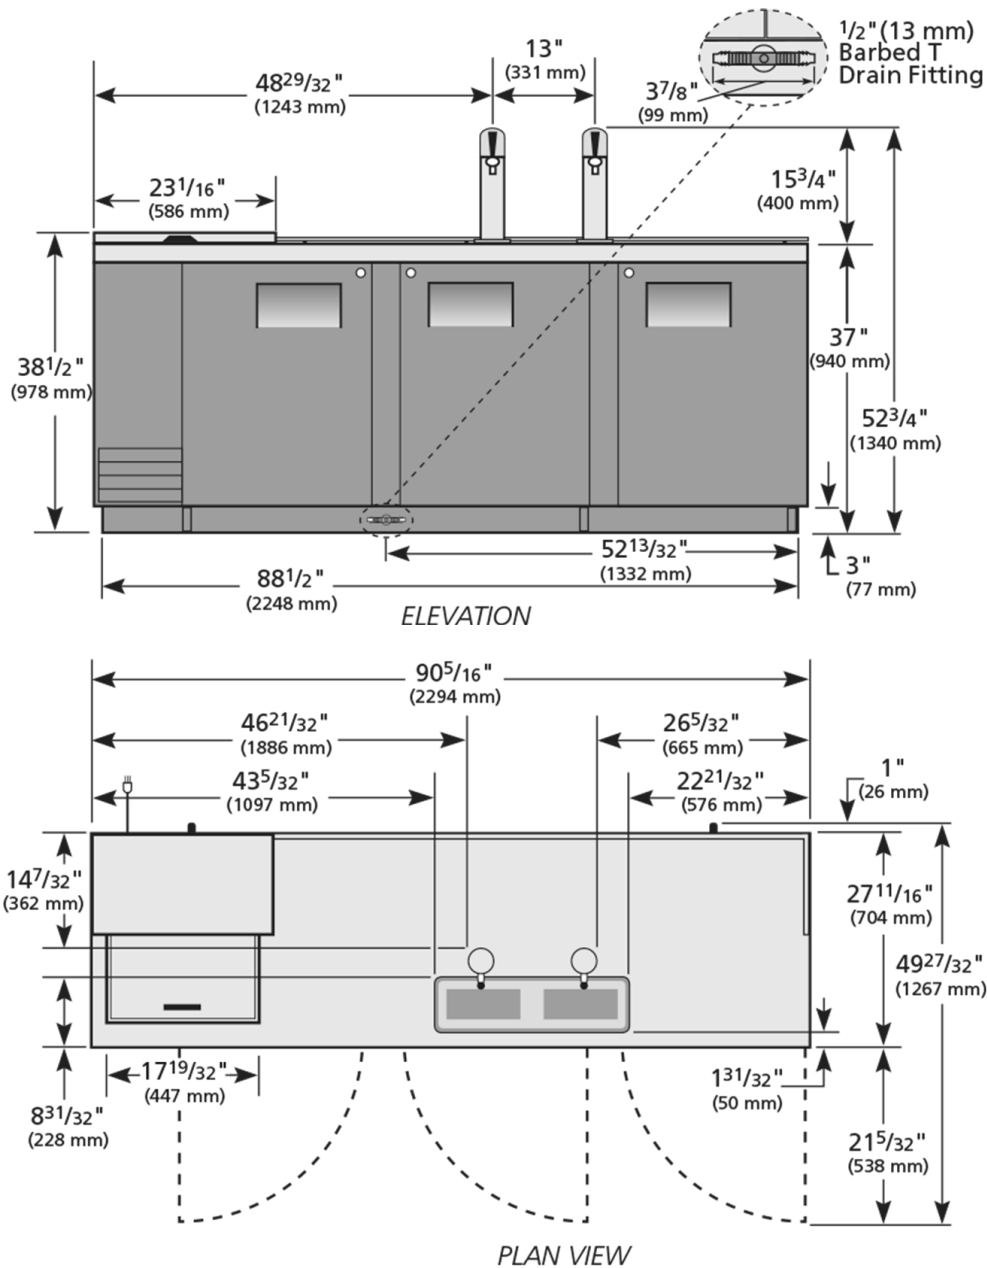

WARRANTY PARTS, COMPRESSOR AND LABOUR 5 YEARS natural refrigerant.

Specifications subject to change without notice. Technical data above related to energy use based on testing of 50Hz or Dual Frequency models Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)
 EMEA [+41 61 563 07 05](tel:+41615630705)
 Australia [+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

