

TFP-32-12M-HC

 Prep Table, 12x 1/6 Top Pans, 1 Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	816	Door Description	1 Solid Swing Door	Temperature Holding	0.5 : 5°C
External Depth (mm)	801	Door Opening	Right hinged	Refrigerant	R290
External Height (mm)	1181	Exterior Construction	Stainless steel front, top & hood, aluminium sides and rear	Voltage / Frequency / Phase	220-240V/50Hz/1
Exclusions	Depth does not include 51 mm for cutting board overhang. Height with lid closed.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	1.9
Gross Volume (Litres)	314	Air Intake Position	Front	Wattage	437
Supplied Shelves	4	Ventilation Position	Front	Defrost Type	Auto
Shelf Size (L x D mm)	703 x 508	Clearance Required	Zero back and sides		
Internal Net Height (mm)	500	Cord Length (Meters)	2.13		
Top Pans Supplied (max depth mm)	12x 1/6 GN (100)	Standard w/ Locks	Not standard (SPEC3 option)		
Unpackaged Weight (kg)	137				
Packaged Weight (kg)	148				
Packaged Dimensions (W x D x H mm)	909 x 864 x 1385				
Cutting Board (L x D mm)	816 x 204				
Supplied Supports	Built-in recessed castors (19 mm clearance)				



Specifications subject to change without notice.
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)
 EMEA [+41 61 563 07 05](tel:+41615630705)
 Australia [+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TFP-32-12M-HC

Prep Table, 12x 1/6 Top Pans, 1 Solid Swing Door

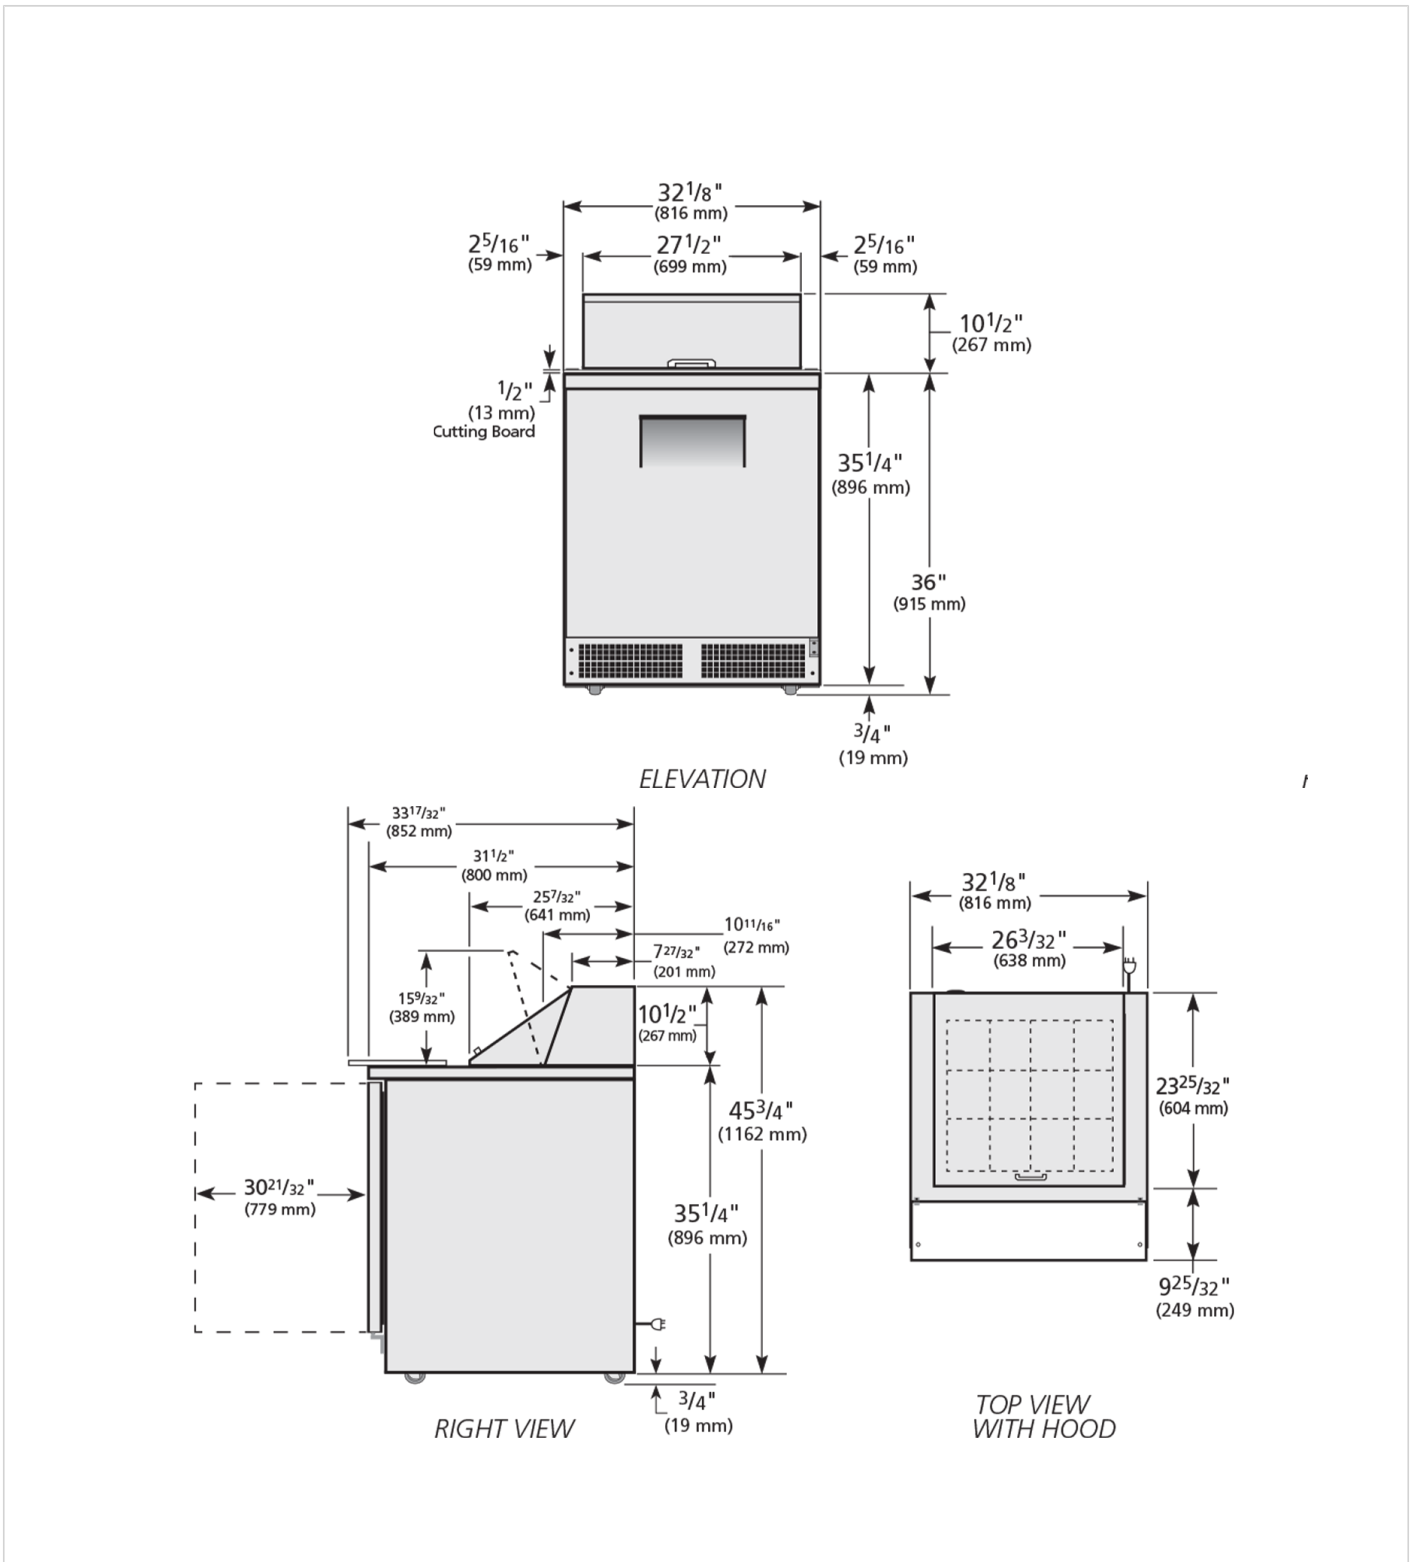

Specifications subject to change without notice. Technical data above related to energy use based on testing of 50Hz or Dual Frequency models Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049
 EMEA +41 61 563 07 05
 Australia +61 2 9619 9999

TFIUK@truemfg.com
 TrueCHCustomerService@truemfg.com
 TrueRefAus@truemfg.com

