

Air Curtain Display

# TOAM-30GS-HC~NSL01

 Upright Open Multideck Refrigerator, with Glass Sides



Dimensions		Build		Technical	
External Width (mm)	762	Exterior Construction	Aluminium or Black powder coated Steel	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	738	Interior Construction	Clear or White coated aluminium, stainless steel base	Refrigerant	R290
External Height (mm)	1994	Air Intake Position	Front	Voltage / Frequency / Phase	220-240V/50Hz/1
Net Volume (Litres)	328	Ventilation Position	Rear	Amps	6.2
Gross Volume (Litres)	723	Clearance Required	102 mm rear, 305 mm above	60Hz model Amps	6.3
Display Area (m <sup>2</sup> )	1.114	Cord Length (Meters)	3.04	Wattage	1426
Supplied Shelves	4	Internal Lighting	LED	60Hz model Wattage	1449
Shelf Size (L x D mm)	665 x 430			Temperature Class	M2
Internal Net Height (mm)	1150			Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Unpackaged Weight (kg)	166			Testing Standard	EN 23953
Packaged Weight (kg)	177			EEC	F
Packaged Dimensions (W x D x H mm)	1067 x 889 x 2134			EEl	74.6
Supplied Supports	Leg Levellers (Castors supplied separate)			kWh/24hr	15.7
				kWh/Annum	5759
				Defrost Type	Auto



Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)  
EMEA [+41 61 563 07 05](tel:+41615630705)  
Australia [+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TOAM-30GS-HC~NSL01

Upright Open Multideck Refrigerator, with Glass Sides

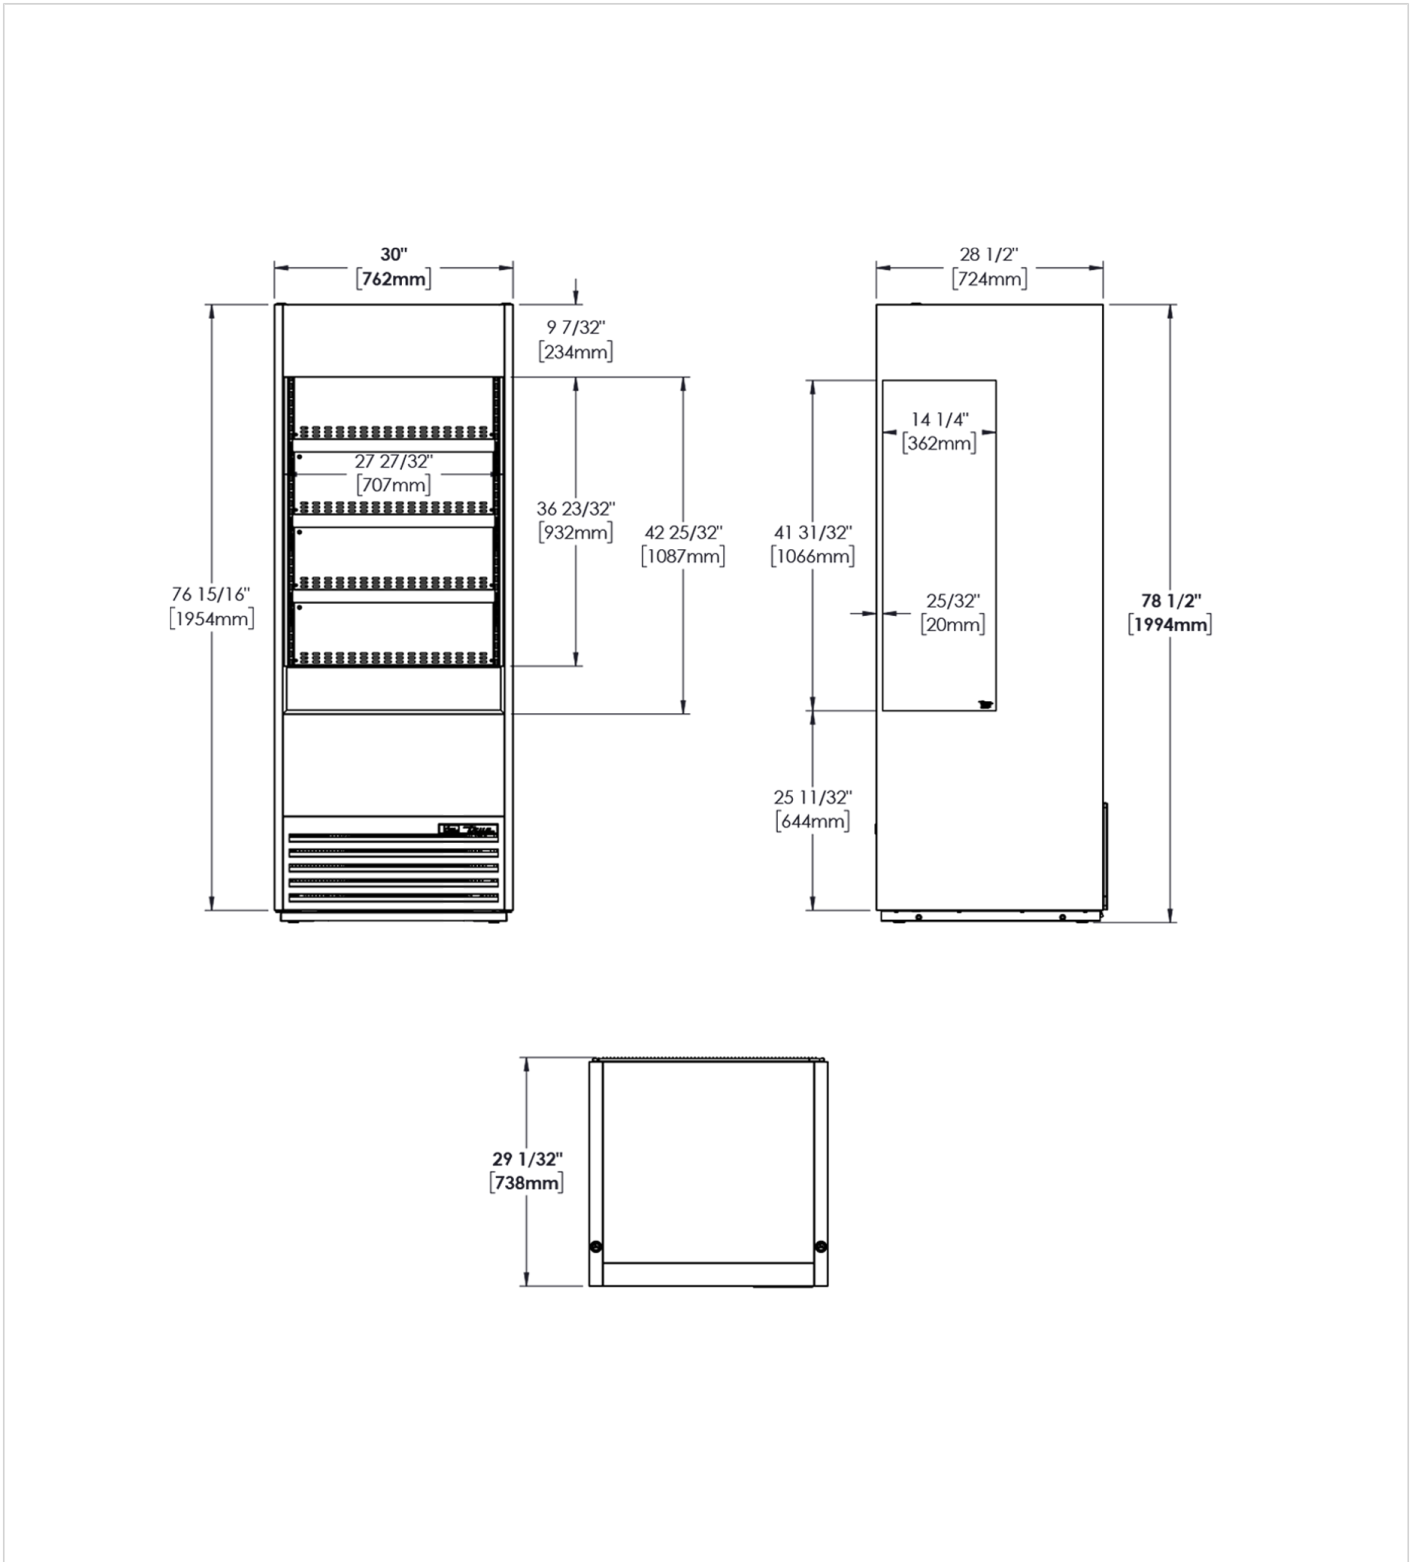

Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049  
EMEA +41 61 563 07 05  
Australia +61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com

