

Air Curtain Display

# TOAM-48GS-HC~TSL01

Upright Open Multideck Refrigerator with Glass Sides + Illuminated Sign Panel



Dimensions		Build		Technical	
External Width (mm)	1220	Exterior Construction	Aluminium or Black powder coated Steel	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	757	Interior Construction	Clear or White coated aluminium, stainless steel base	Refrigerant	R290
External Height (mm)	1994	Air Intake Position	Front	Voltage / Frequency / Phase	220-240V/50Hz/1
Net Volume (Litres)	547	Ventilation Position	Rear	Amps	10
Gross Volume (Litres)	963	Clearance Required	102 mm rear, 305 mm above	60Hz model Amps	11
Display Area (m <sup>2</sup> )	1.65	Cord Length (Meters)	3.04	Wattage	2300
Supplied Shelves	4	Internal Lighting	LED	60Hz model Wattage	2530
Shelf Size (L x D mm)	1120 x 425			Temperature Class	M2
Internal Net Height (mm)	1150			Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Unpackaged Weight (kg)	234			Testing Standard	EN 23953
Packaged Weight (kg)	245			EEC	G
Packaged Dimensions (W x D x H mm)	1321 x 889 x 2134			EEl	97.1
Supplied Supports	Leg Levellers (Castors supplied separate)			kWh/24hr	29.5
				kWh/Annum	10799
				Defrost Type	Auto



Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)  
EMEA [+41 61 563 07 05](tel:+41615630705)  
Australia [+61 2 9619 9999](tel:+61296199999)


[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



Air Curtain Display

# TOAM-48GS-HC~TSL01

Upright Open Multideck Refrigerator with Glass Sides + Illuminated Sign Panel

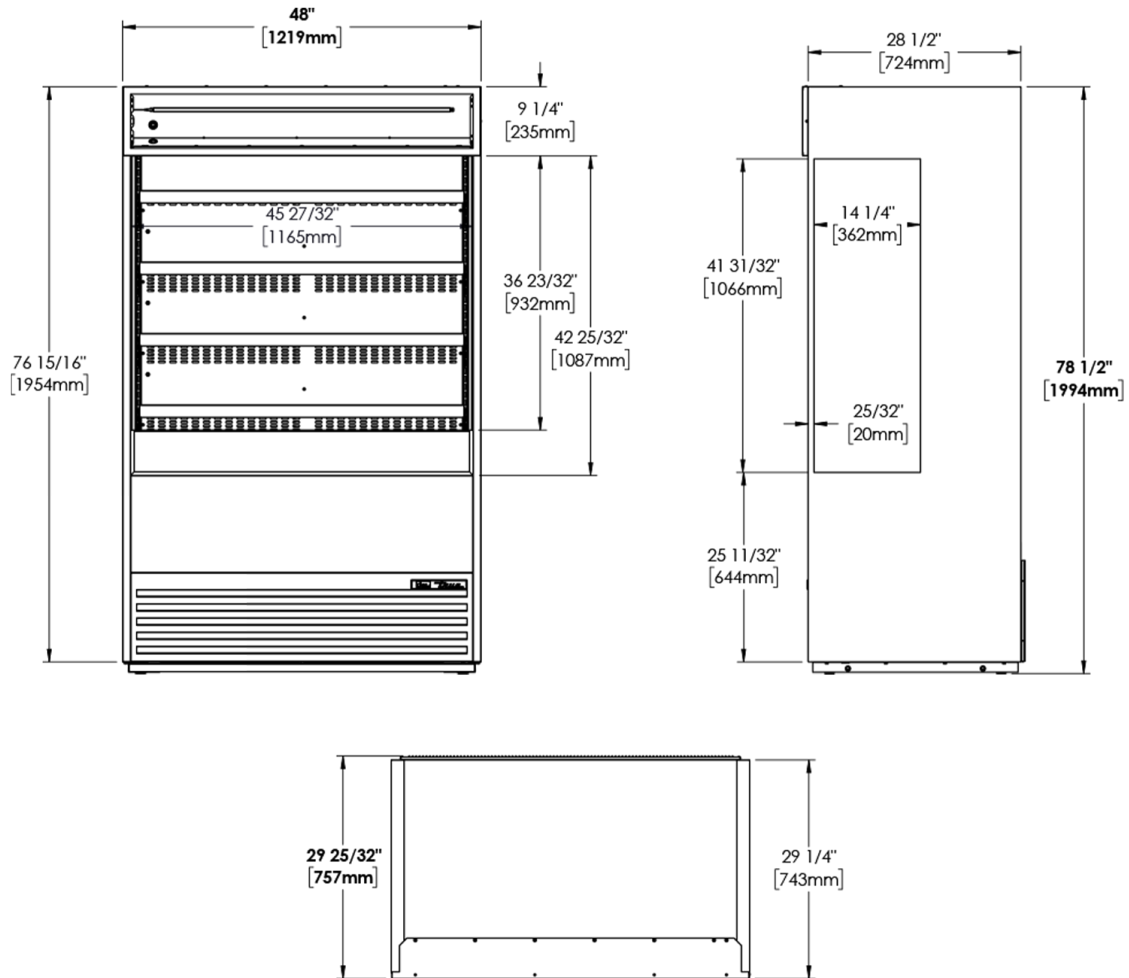

**WARRANTY**  
PARTS, COMPRESSOR AND LABOUR  
5 YEARS  
natural refrigerant.

Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049  
EMEA +41 61 563 07 05  
Australia +61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

