

Prep Tables

TPP-AT-44-HC

 Pizza Prep Table, 6x 1/3 Top Pans, 1 Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	1133	Door Description	1 Solid Swing Door	Temperature Holding	0.5 : 5°C
External Depth (mm)	854	Door Opening	Right hinged	Refrigerant	R290
External Height (mm)	1133	Exterior Construction	Stainless steel front, top & lids, aluminium sides and rear	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers and 42mm for cutting board overhang.	Interior Construction	Clear coated aluminium, stainless steel base	Amps	1.8
Gross Volume (Litres)	323	Air Intake Position	Front	Wattage	414
Supplied Shelves	2	Ventilation Position	Front	Defrost Type	Auto
Shelf Size (L x D mm)	635 x 705	Clearance Required	Zero back and sides		
Internal Net Height (mm)	550	Cord Length (Meters)	3.35		
Top Pans Supplied (max depth mm)	6x 1/3 GN (150)	Standard w/ Locks	Not standard (SPEC3 option)		
Unpackaged Weight (kg)	139				
Packaged Weight (kg)	150				
Packaged Dimensions (W x D x H mm)	1296 x 966 x 1245				
Cutting Board (L x D mm)	1131 x 496				
Supplied Supports	ø 127 mm castors (146 mm height)				



Specifications subject to change without notice.
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)
 EMEA [+41 61 563 07 05](tel:+41615630705)
 Australia [+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TPP-AT-44-HC

 Pizza Prep Table, 6x 1/3 Top Pans, 1 Solid Swing Door

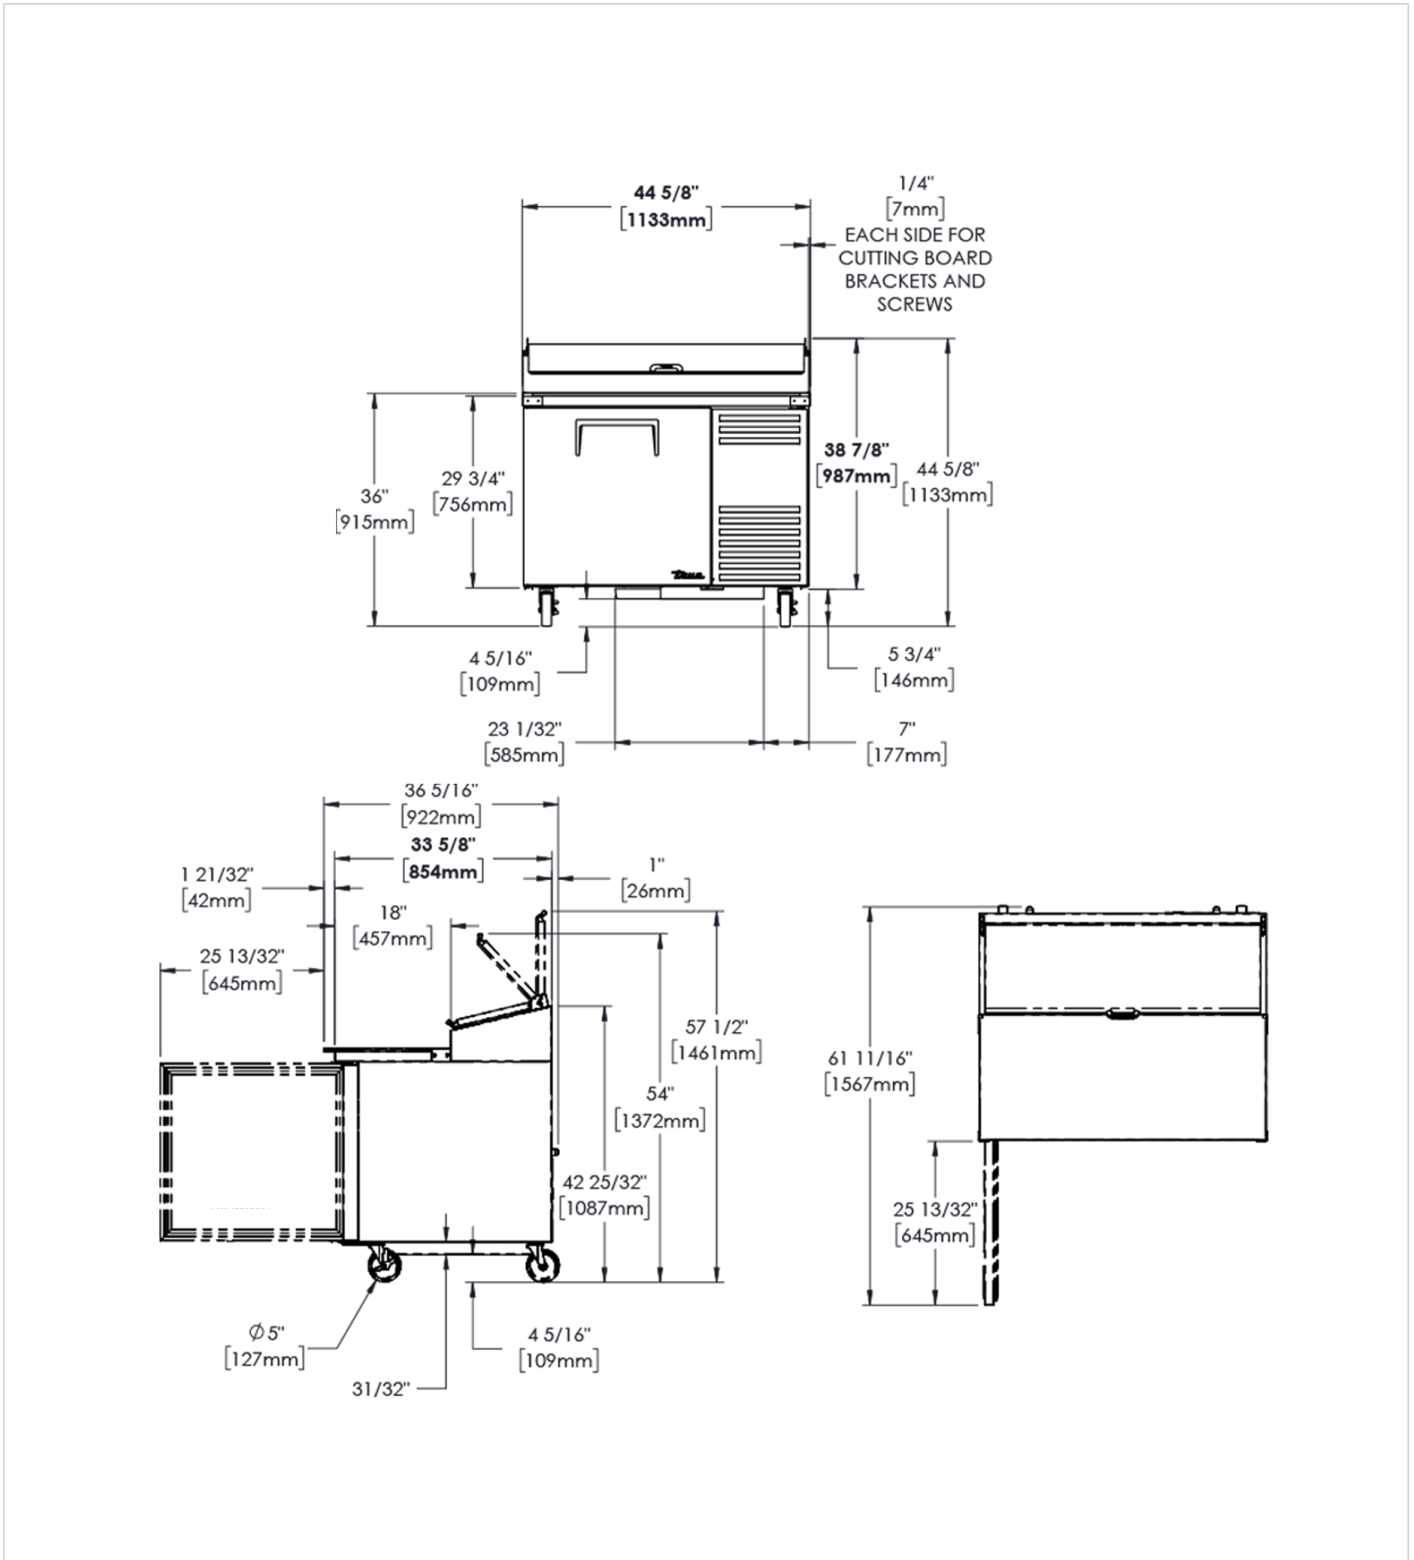

Specifications subject to change without notice.
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland **0800 783 2049**
 EMEA **+41 61 563 07 05**
 Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

