

# TUC-24-HC

 Undercounter Foodservice Refrigerator, 1 Solid Swing Door


| Dimensions                         |  | Build                 |  | Technical                   |  |
|------------------------------------|--|-----------------------|--|-----------------------------|--|
| External Width (mm)                | 610  | Door Description      | 1 Solid Swing Door   | Temperature Holding         | 0.5 : 3.3°C  |
| External Depth (mm)                | 627  | Door Opening          | Right (standard) or Left. Field Reversible.                | Refrigerant                 | R290   |
| External Height (mm)               | 802  | Exterior Construction | Stainless steel front & countertop, aluminium sides & rear | Voltage / Frequency / Phase | 220-240V/50-60Hz/1   |
| Exclusions                         | Depth does not include 26 mm for rear bumpers. | Interior Construction | Clear coated aluminium, stainless steel base               | Amps                        | 1  |
| Net Volume (Litres)                | 94   | Air Intake Position   | Front  | Wattage                     | 230  |
| Gross Volume (Litres)              | 158  | Ventilation Position  | Front  | Climate Class               | 5  |
| Supplied Shelves                   | 2  | Clearance Required    | Zero back and sides  | Operating Statement         | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Shelf Size (L x D mm)              | One 508 x 352 +<br>One 508 x 273               | Cord Length (Meters)  | 2.13   | Testing Standard            | EN 16825   |
| Internal Net Height (mm)           | 600  | Standard w/ Locks     | Standard   | EEC                         | A  |
| Unpackaged Weight (kg)             | 60   |                       |  | EEL                         | 19.5   |
| Packaged Weight (kg)               | 71   |                       |  | kWh/24hr                    | 1.08   |
| Packaged Dimensions (W x D x H mm) | 788 x 762 x 1042                               |                       |  | kWh/Annum                   | 395  |
| Supplied Supports                  | Built-in recessed castors (7mm clearance)      |                       |  | Defrost Type                | Auto   |



Specifications subject to change without notice.  
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)  
 EMEA [+41 61 563 07 05](tel:+41615630705)  
 Australia [+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TUC-24-HC

Undercounter Foodservice Refrigerator, 1 Solid Swing Door

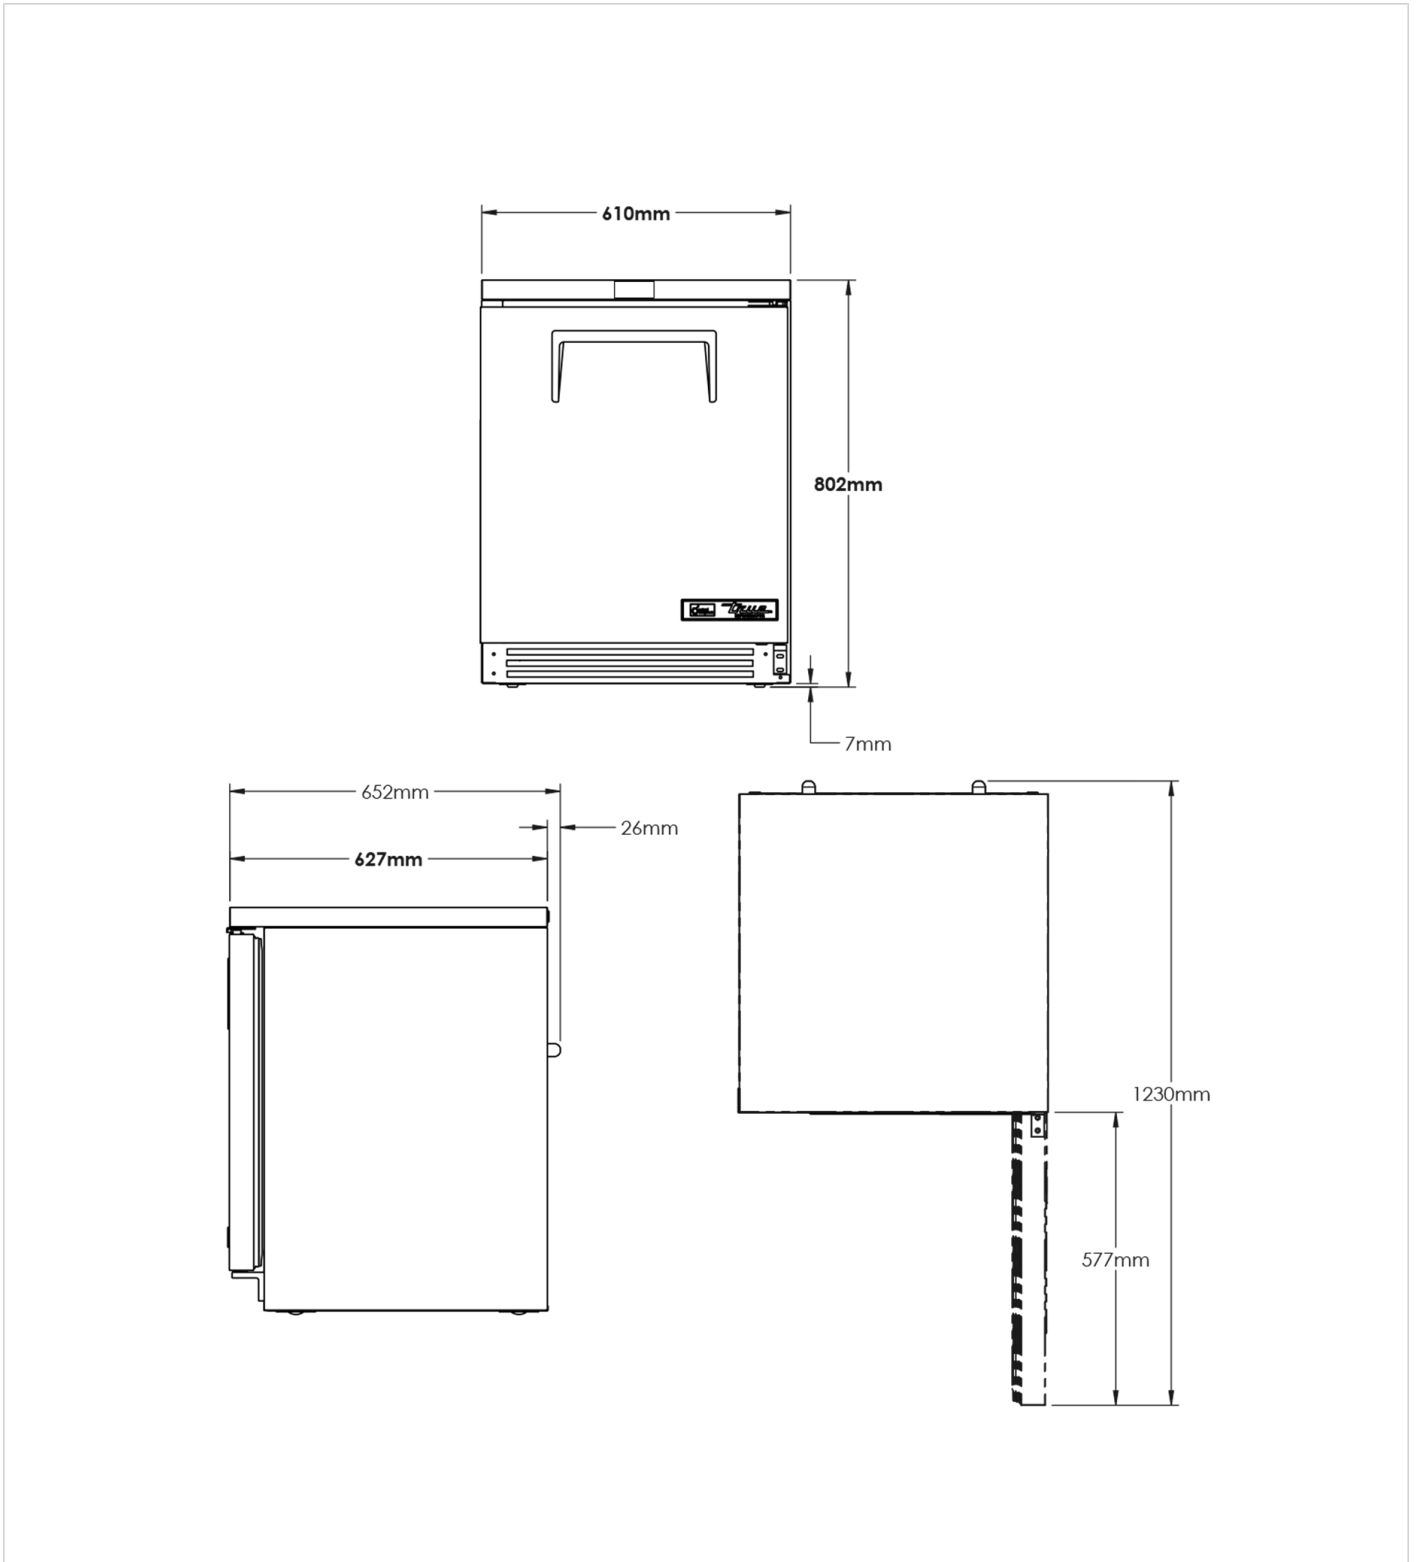

Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)  
EMEA [+41 61 563 07 05](tel:+41615630705)  
Australia [+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

