

Model:

## **TRUE REFRIGERATION INTERNATIONAL**

UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0 Free Phone to U.S. 0 800 894 928 • www.truemfg.com

**Undercounter:** TUC-48F-LP-HC

Low Profile Solid Door Freezer with Hydrocarbon Refrigerant



## TUC-48F-LP-HC


natural

refrigerant.


INNOVATION

9/19

- True's undercounter's are designed with enduring quality and value that protects your long term investment. Our commitment to using the highest quality materials and oversized refrigeration ensures exceptional food preservation.
- "Low Profile" models are designed to slide easily under custom built countertops.
- 1 <sup>1</sup>/<sub>2</sub>" (39 mm) diameter dual swivel castors. 317/8" (810 mm) work surface height.
- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- Oversized, factory balanced, refrigeration system holds -10°F (-23.3°C). Ideal for frozen food and ice cream.
- Stainless steel front, countertop, and sides. Corrosion resistant GalFan coated steel back.
- Interior attractive, NSF approved, clear coated aluminum liner with stainless steel floor.
- Self closing doors. Positive seal, torsion type closure system.
- Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).



## PLAN VIEW

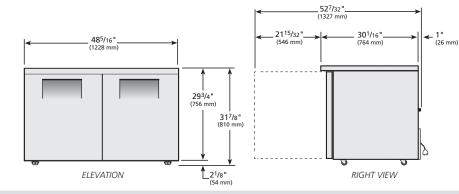

## ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next 1/8").

	Model			Cabinet Dimensio (mm)			Net Volume		24 hr/ Energy	Annual Energy Consumption	Crated Weight	
Model	Туре	Doors	Shelves	W	D†	н	(litres)	EEC	EEI	(kWh)	(kWh)	(kg)
TUC-48F-LP-HC	Counter Frozen	2	4	1229	766	810	249	D	55.8	5.859	2139	125

+ Depth does not include 26 mm for rear bumpers.