



Catalogue :
OTHER REFRIGERATION

Chapter :
FRONT BAR CHEST COOLERS

Article :
BFP-200 I 230V 50/60Hz

Code:
19006519

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	1.990,00	650,00
Depth	mm	552,00	2.050,00
Height	mm	850,00	970,00
Weight	kg	96,00	101,00
Volume	m3	0,93	1,29
<u>ELECTRICITY</u>		50/60Hz	
	230V		
	Power		0,27 kW
Connections	230 V. 1+N+T	2X1,5+T - 2 A	
	230 V. III+T	3X4+T - 32 A	
	400 V. III+N+T	4X1,5+T - 16 A	
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			R-134a
	Refrigeration power		0,304
	Climat class	4	
<u>SOUND LEVEL</u>			< 65,00 db
<u>CERTIFICATES</u>		SGS-2103-0906-1	
<u>INSTALLATION</u> - <u>CONNECTIONS</u>			Ø
	► <u>ELECTRICITY</u>	SI	

DESCRIPTION

BOTTLE COOLERS, BFP-200 I

SPECIFICATIONS

Outside and inner sides made of high quality austenitic stainless steel.
40 kg/m3 injected polyurethane isolation.
Hermetically sealed ventilated compressor at the bottom of the equipment.
Static copper piping and aluminium flaps evaporator.
Analogical thermostat for temperature control.
Sliding doors with built in handles.
Height adjustable stainless steel legs.
Right side cooling unit with grilled door.
Fitted with vertical dividers made of plastic covered steel grid.
Waste water drainage and curved joints between inner panels for easy cleaning.
Working temperature: +2 °C, +6 °C (Room temperature: 38 °C).

Doors: 4
No. of separator grids: 3
Capacity: 539 L
Electric power: 258 W
Coolant: R-134a
Dimensions: 1.990x552x850 mm




Catalogue :
OTHER REFRIGERATION

Chapter :
FRONT BAR CHEST COOLERS

Article :
BFP-200 I 230V 50/60Hz

Code :
19006519

SCHEMA - DIMENSIONS

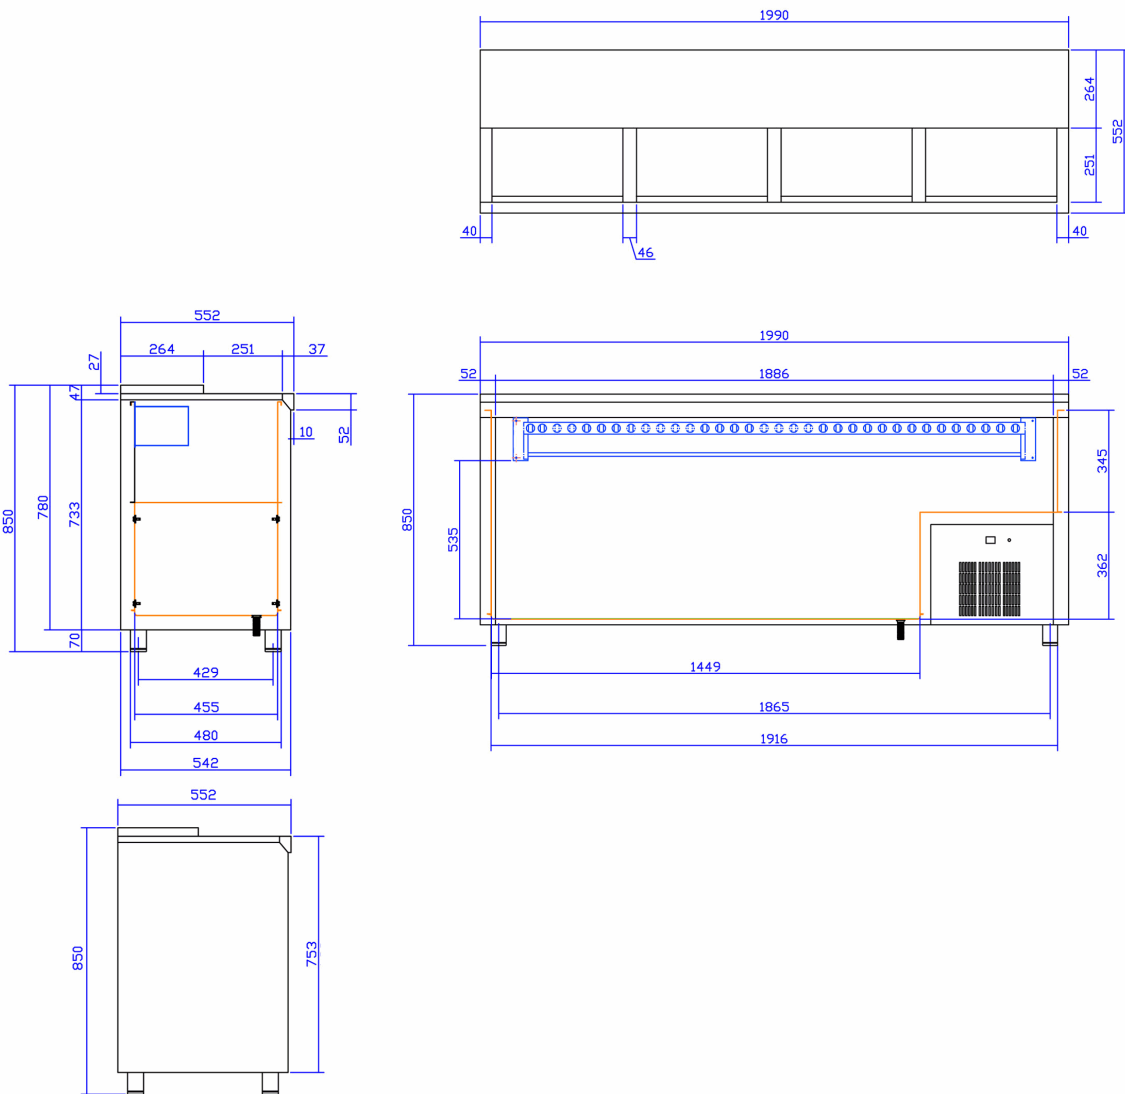

Pata / Pied / Leg 65/88 mm