

BONVUE MODERN DISPLAYS




- 2 Adjustable levels of shelving plus floor
- Secop compressors
- Stainless steel
- Triple glazed front with heated filaments to stop condensation
- Ambient 40°C & 40% RH
- LED lighting over each level
- Self evaporating drainage
- Digital temp. Control & read-out
- Sliding rear glass doors
- Fan-forced thermal air-flow & humidity






Code	GEMS Star Rating	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range °C	Ambient/ RH%	Voltage	Power (W/A)
Chilled Displays							
SG090FA-2XB	5	900x700x1250	195	+2 to +8	40/40	240	750/10
SG120FA-2XB	5	1200x700x1250	235	+2 to +8	40/40	240	880/10
SG150FA-2XB	5	1500x700x1250	315	+2 to +8	40/40	240	970/10
SG180FA-2XB	4	1800x700x1250	405	+2 to +8	40/40	240	1250/10
SG200FA-2XB	3	2000x700x1250	480	+2 to +8	40/40	240	1360/10
Heated Displays							
SG090FE-2XB	–	900x700x1250	165	+30 to +85	40/40	240	1100/10
SG120FE-2XB	–	1200x700x1250	205	+30 to +85	40/40	240	1200/10

Allow 100mm clearance for installation, all vents must be left clear. Heated cabinets are for hot food holding only, not designed to heat product. Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ




SG090FA-2XB/SG090FE-2XB






SG120FA-2XB/SG120FE-2XB



SG150FA-2XB

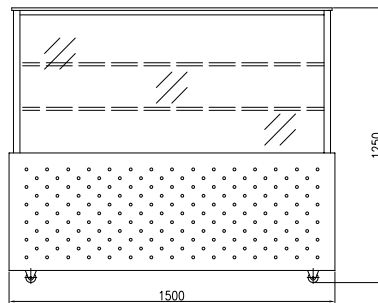

SG180FA-2XB

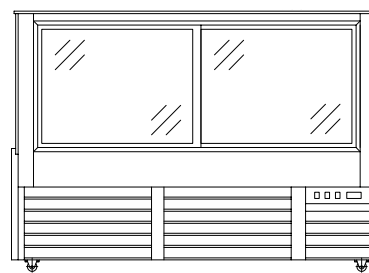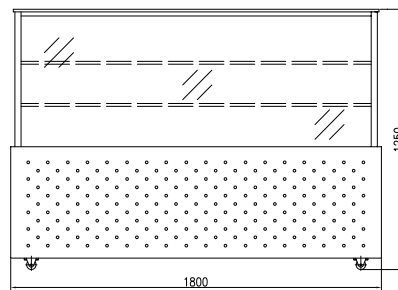

SG200FA-2XB

