

BONVUE DELUXE DISPLAYS



- 3 Adjustable levels of shelving plus floor
- Secop compressors
- Stainless Steel
- Triple glazed front with heated filaments to stop condensation
- LED lighting over each level
- Self evaporating drainage
- Digital temp. control & read-out
- Rear sliding glass doors
- Fan-forced thermal air-flow & humidity
- Ambient 40°C & 40% RH





Code	GEMS Star Rating	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range °C	Ambient/ RH%	Voltage	Power (W/A)
Chilled Displays							
SL830V	5	900x740x1350	215	+2 to +8	40/40	240	621/10
SL840V	4	1200x740x1350	260	+2 to +8	40/40	240	792/10
SL850V	4	1500x740x1350	305	+2 to +8	40/40	240	895/10
SL860V	4	1800x740x1350	350	+2 to +8	40/40	240	1056/10
SL880V	3	2400x740x1350	440	+2 to +8	40/40	240	1313/10
Heated Displays							
H-SL830V	–	900x740x1350	200	+30 to +85	40/40	240	870/10
H-SL840V	–	1200x740x1350	240	+30 to +85	40/40	240	975/10

Allow 100mm clearance for installation, all vents must be left clear. Heated cabinets are for hot food holding only, not designed to heat product. Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ



SL830V/H-SL830V

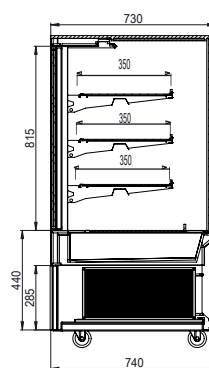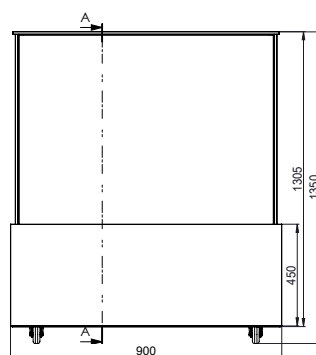



SL840V/H-SL840V

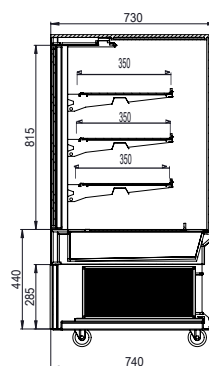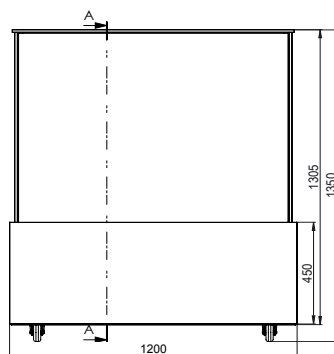

SL850V

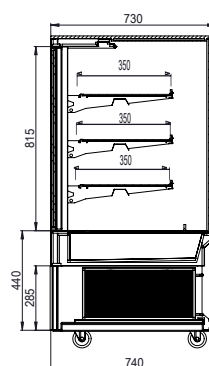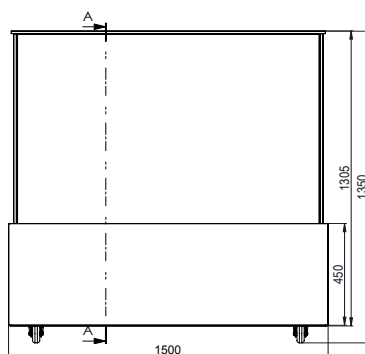

SL860V

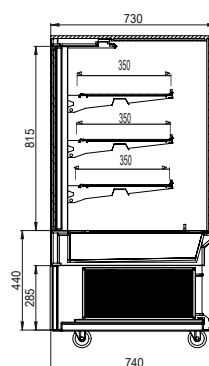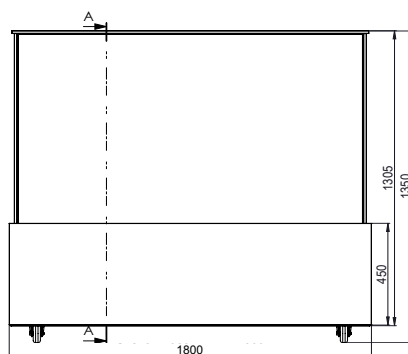

SL880V

