

STAINLESS STEEL SOLID DOOR UPRIGHT STATIC FRIDGES/FREEZERS



- 60mm (freezers) & 50mm (fridges) high density insulation, CFC & HCFC free
- Stainless Steel exterior
- Zanussi compressors
- Digital temp. control & read-out




- Locking doors
- LED lighting inside
- Castors on rear adjustable legs in front
- Internal corners are rounded for hygiene & easy cleaning

- Refrigerated into fix shelves for even cooling
- Regular defrosting is necessary






AMBIENT 38°C




HR200 S/S / HF200 S/S



HR400 S/S / HF400 S/S

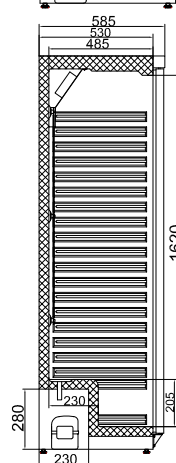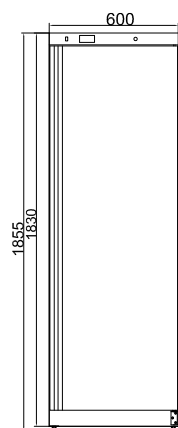

HR600 S/S / HF600 S/S

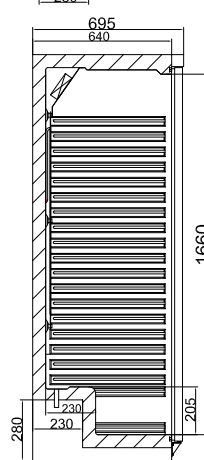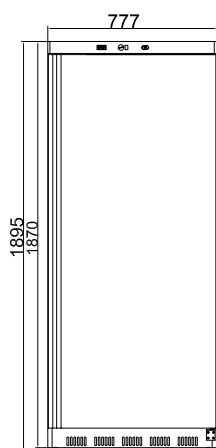

Code	GEMS Star Rating	Litre	Shelves	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range	Ambient/ RH%	Voltage	Power (W/A)
S/S door fridges									
HR200 S/S	7	129	2	600x600x855	44	+2 to +8	38/50	240	150/10
HR400 S/S	4	361	4	600x600x1850	74	+2 to +8	38/50	240	185/10
HR600 S/S	5	620	4	777x695x1895	97	+2 to +8	38/50	240	185/10
S/S door freezers									
HF200 S/S	9	129	3	600x600x855	44.5	-22 to -18	38/50	240	150/10
HF400 S/S	6	361	6	600x600x1850	79	-22 to -18	38/50	240	210/10
HF600 S/S	8	620	6	777x695x1895	101	-22 to -18	38/50	240	350/10

Allow 100mm clearance for installation, all vents must be left clear.

Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ