


# 700 SERIES S/S WORKBENCH



- Fridge -2 to 8°C
- Freezer -18 to -22°C
- Solid Door fridge Ambient 43°C
- Glass Door fridge Ambient 35°C
- Solid Door freezer Ambient 38°C
- Fan-forced evaporator cooling
- Auto defrost
- Self evaporating drainage
- Insulation is CFC & HCFC free
- Heated door frame on freezers
- Internal corners constructed for easy cleaning
- 100mm wall clearance required for ventilation
- Glass door fridges come with internal LED lights
- Castors
- Optional splash back





TL900TN



TL1200TN / TL1200BT

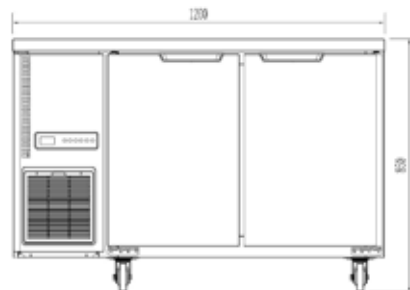

TL1500TN / TL1500BT

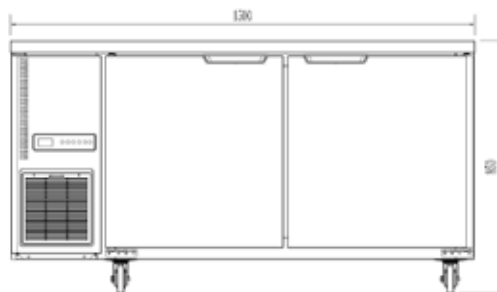

Code	Litre	Dimensions (WxDxH mm)	Weight (kg)	Temperature Range	Ambient/ RH%	Voltage	Power (W/A)
<b>S/S single door fridge</b>							
TL900TN	166	900x700x850	83	-2 to +8	43/40	240	170/10
<b>S/S double door fridge</b>							
TL1200TN	212	1200x700x850	70	-2 to +8	43/40	240	219/10
TL1500TN	315	1500x700x850	106	-2 to +8	43/40	240	235/10
<b>S/S large triple door fridge</b>							
TL1800TN-3D	417	1800x700x850	113	-2 to +8	43/40	240	250/10

Allow 100mm clearance for installation, all vents must be left clear. Prices and specifications are subject to change without notice. Pictures are for illustrative purpose and final product may differ