

Sinks & Basins



Round Hands Free Knee Operated Basin - Timed Flow




AB-KNEEHB-RT (with tempering valve)

AB-KNEEHB-RTMV (with thermostatic mixing valve)


AB-KNEEHB-R (without tempering valve or thermostatic mixing valve)

- 6.3L capacity
- Shroud - Constructed from 1.2mm 304 grade stainless steel
- Basin - Constructed from 1mm 304 grade stainless steel
- 18 second timed flow
- 50mm splashback
- 40mm outlet - Suits PW40 & SSBW-40
- 500kPa Maximum Working Pressure
- WELS 4 Star 6.5LPM


Top

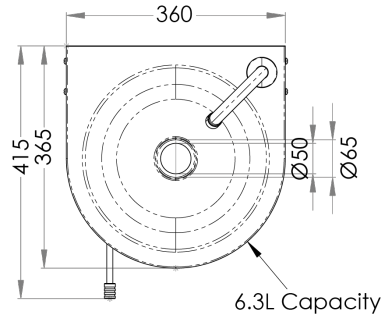


Front

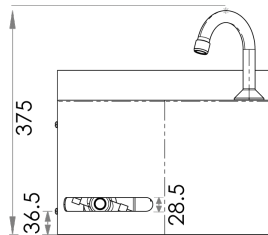

Back

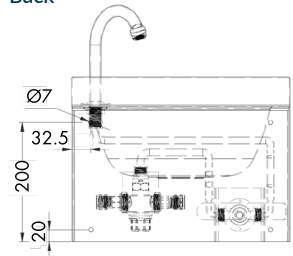

Side

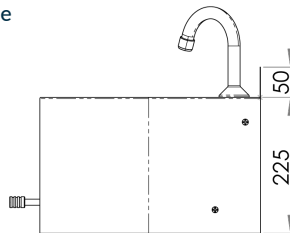

Suggested mounting height from floor level for standard use - 850mm-900mm

